


FIRE FIGHTING



TECHNICAL CATALOGUE

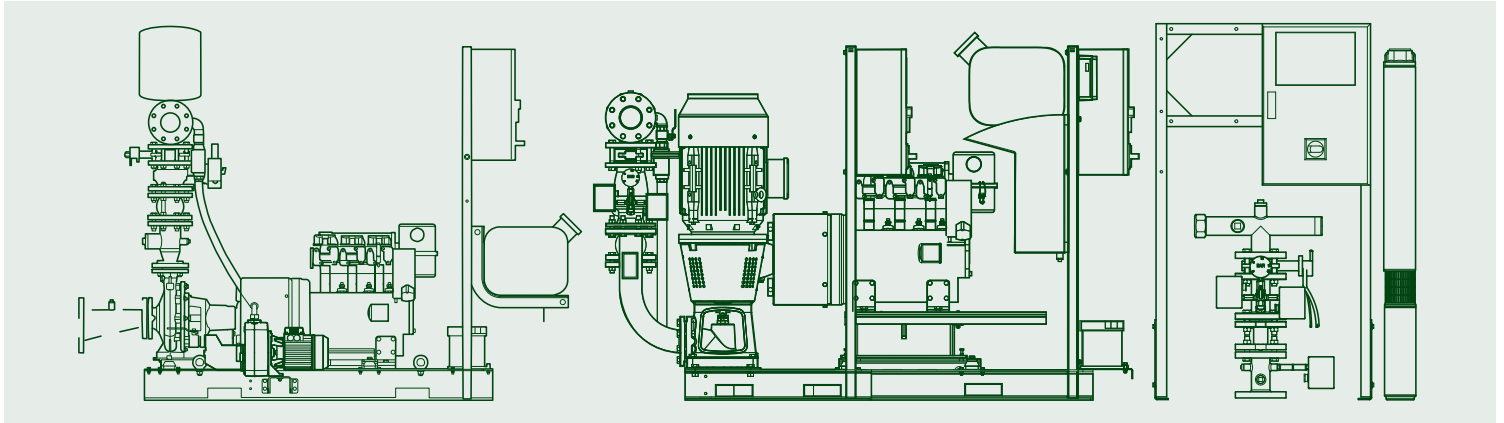

THE INTERNATIONAL CERTIFICATION NETWORK

CERTIFICATE

CISQ/IMQ has issued an IQNet recognized certificate that the organization:

DWT HOLDING SPA
 VIA MARCO POLO 14 - 35035 MESTRINO (PD)
 BRENDOLA (VI) - CASTELLO DI GODEGO (TV) - BIENTINA (PI) -
 VAL LIONA (VI) - PRC CHINA - HUNGARY

has implemented and maintains a

Quality Management System

for the following scope:

Design, production, sale and assistance of components and electronic controls for pumps, electropumps and pump sets for cold and hot water for civil, industrial and agricultural use

Further clarifications regarding the applicability of ISO 9001:2015 requirements may be obtained by consulting the organization

which fulfills the requirements of the following standard:

ISO 9001:2015

Issued on: **2018 - 05 - 21**
 Expires on: **2021 - 05 - 27**

This attestation is directly linked to the IQNet Partner's original certificate and shall not be used as a stand-alone document

Registration Number: IT - 824



Alex Stoichiou
President of IQNET




Ing. Claudio Provetti
President of CISQ

IQNet Partners:
 AENOR Spain AFNOR Certification France APCER Portugal CCC Cyprus CISQ Italy
 CQC China CMAI China CQS Czech Republic Cst Cert Croatia DOS Holding GmbH Germany FCAN Brazil
 FONDONORMA Venezuela ICONTEC Colombia Inspira Certificat Oy Finland INTECO Costa Rica
 IRAM Argentina JQA Japan KIQ Korea MIRTEC Greece MSZT Hungary Nemko AS Norway NSAI Ireland
 NYCE-SIGE Italia PCBQ Poland Quality Austria InterVie RR Rostec SB Israel SIQ Slovenia
 SIRIM QAS International Malaysia SQS Switzerland SRAC Romania TEST St Petersburg Russia TSE Turkey YUQS Serbia
 IQNet is represented in the USA by: AFNOR Certification, CISQ, DOS Holding GmbH and NSAI Inc.


* The list of IQNet partners is valid at the time of issue of this certificate. Updated information is available under www.iqnet-certification.com

AL 1 di 1
Ann. 1 di 1



www.imq.it

CISQ is a member of



www.iqnet-certification.com

IQNet, the association of the world's first class certification bodies, is the largest provider of management system certifications in the world. IQNet is composed of more than 30 bodies and counts over 120 subsidiaries all over the globe.

ALLEGATO CERTIFICATO n. **9101.COGE**
 ANNEX CERTIFICATE

(*) Unità Operative:
 (*) Operative Units:


DAB PUMPS SPA
 VIA BONANNO PISANO 1 - 56031 BIENTINA (PI)

DAB PUMPS SPA
 VIA DEL LAVORO 3 - 36040 VAL LIONA (VI)

DAB PUMPS QINGDAO CO. LTD
 40 KAITUO ROAD, QINGDAO DEVELOPMENT ZONE - SHANGDONG PROVINCE, PRC CHINA

DAB PUMPS HUNGARY KFT
 BUDA ERNO H - 8800 NAGYKANISZA HUNGARY


DATE:	PRIMA CERTIFICAZIONE FIRST CERTIFICATION	EMISSIONE CORRENTE CURRENT ISSUE	SCADENZA EXPIRY
	1995-07-17	2018-05-21	2021-05-27




IMQ S.p.A. - VIA GURTELLANO, 43 - 20138 MILANO ITALY
 Management Systems Division - Flavio Orsaghi



IAF: 18, 19, 29



Organismo di Certificazione Federato CISQ
www.imq.it



FEDERAZIONE CISQ
www.cisq.com

La validità del certificato è subordinata a un'ispezione annuale o a meno frequente secondo le disposizioni del regolamento interno dell'Organismo di Certificazione. Il presente certificato è valido fino a scadenza, se non viene rinnovato o se non viene sospeso o annullato.

CISQ è la Federazione Italiana di Organismi di Certificazione del sistema di gestione aziendale. CISQ è la Italian Federation of management system Certification Bodies.



www.imq.it

CERTIFICATO N. **9101.COGE**
 CERTIFICATE N. **9101.COGE**

SI CERTIFICA CHE IL SISTEMA QUALITÀ DI
 WE HEREBY CERTIFY THAT THE QUALITY SYSTEM OPERATED BY

DWT HOLDING SPA
 VIA MARCO POLO 14 - 35035 MESTRINO (PD)

UNITÀ OPERATIVE / OPERATIVE UNITS

DAB PUMPS SPA
 VIA MARCO POLO 14 - 35035 MESTRINO (PD)
DAB PUMPS SPA
 VIA EINAUDI 2 - 36040 BRENDOLA (VI)
DAB PUMPS SPA
 VIA E. FERMI 6-8-10 - 31030 CASTELLO DI GODEGO (TV)

Vedere gli Allegati per le altre Unità Operative (n° 1 pagina)
 View the Annexes for the other Operative Units (n° 1 page)

E' CONFORME ALLA NORMA / IS IN COMPLIANCE WITH THE STANDARD
ISO 9001:2015

PER LE SEGUENTI ATTIVITÀ / FOR THE FOLLOWING ACTIVITIES

Progettazione, produzione, commercializzazioni e assistenza di componenti e controlli elettronici per pompe, elettropompe e gruppi di pompaggio per acqua fredda e calda ad uso civile, industriale ed agricolo
 Design, production, sale and assistance of components and electronic controls for pumps, electropumps and pump sets for cold and hot water for civil, industrial and agricultural use

IL PRESENTE CERTIFICATO E' SOGGETTO AL RISPETTO DEL
 REGOLAMENTO PER LA CERTIFICAZIONE DEI SISTEMI DI GESTIONE
 THE USE AND THE VALIDITY OF THE CERTIFICATE SHALL SATISFY THE
 REQUIREMENTS OF THE RULES FOR CERTIFICATION OF MANAGEMENT SYSTEMS

DATE:	PRIMA CERTIFICAZIONE FIRST CERTIFICATION	EMISSIONE CORRENTE CURRENT ISSUE	SCADENZA EXPIRY
	1995-07-17	2018-05-21	2021-05-27



IMQ S.p.A. - VIA GURTELLANO, 43 - 20138 MILANO ITALY
 Management Systems Division - Flavio Orsaghi



IAF: 18, 19, 29



Organismo di Certificazione Federato CISQ
www.imq.it



FEDERAZIONE CISQ
www.cisq.com

La validità del certificato è subordinata a un'ispezione annuale o a meno frequente secondo le disposizioni del regolamento interno dell'Organismo di Certificazione. Il presente certificato è valido fino a scadenza, se non viene rinnovato o se non viene sospeso o annullato.

CISQ è la Federazione Italiana di Organismi di Certificazione del sistema di gestione aziendale. CISQ è la Italian Federation of management system Certification Bodies.

CONTENTS

FIRE-FIGHTING PUMP SETS



1 KDN COMPACT

PAGE 3



1KVT

PAGE 104



S4 - SS6 - SS7 - SS8

PAGE 171




1/2 NKV

PAGE 203

ACCESSORIES

TECHNICAL APPENDIX




PAGE 215

PAGE 223

1 KDN COMPACT

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH STANDARDIZED CENTRIFUGAL PUMPS

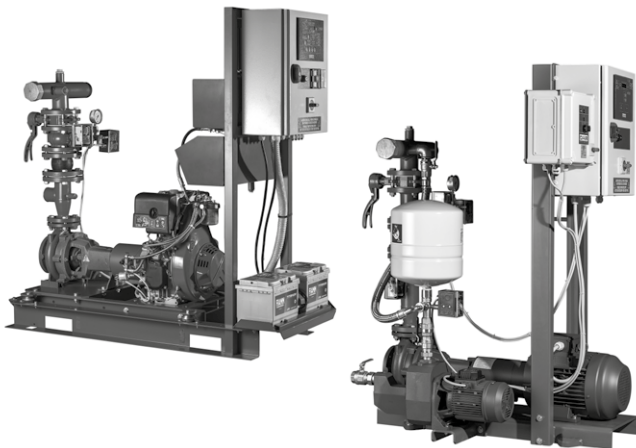

TECHNICAL DATA

Operating range: from 10 to 650 m³/h

Pumped liquid: clean, free of solids and abrasives, non-viscous, non-aggressive, non-crystallised and chemically neutral, with properties similar to water

Pumped liquid temperature range: from 0 to 70 °C

Maximum ambient temperature: + 40°C

Maximum operating pressure: 16 bar (1600kPa) PN16

Special executions on request:

Diesel version with water/water heat exchanger

Electric 230 three-phase 50 or 60 Hz, bronze impeller

APPLICATIONS

Fire fighting sets with diesel engine and electric motor, ideal for commercial building automatic sprinklers and/or hydrants. Designed to be used in conjunction with each other, to meet the requirements of all the versions pursuant to UNI EN 12845 and UNI 10779 standards.

CONSTRUCTION FEATURES OF THE UNI EN 12845 FIRE-FIGHTING PUMP SET

Pre-assembled set on RAL3000 red painted steel base, supporting the pump, the motor, and the electric control panel. The pump is coupled, by means of a spacer elastic coupling, to an electric (**efficiency level IE3**) or Diesel motor capable of providing the power absorbed by the pump at any pump load condition, from no-load, to a load corresponding to **NPSH16m (as requested by section 10.1 of the UNI EN 12845 standard)**.

The UNI EN 12845 DAB fire-fighting sets are supplied in modular version. This type of solution facilitates the transport, as well as the installation of DAB fire-fighting sets in pump rooms, even in case of narrow entrance doors. Thanks to a coupling kit (supplied as accessory), it is possible to complete all the compositions contemplated by the standard (one, two, three pumps, electric or Diesel, with or without compensation pump).

Each module has a serial number with its own declaration of conformity, and its own installation and maintenance manual.

Specific characteristics of the Diesel engine-driven pump

Diesel engine-driven pump sets have a vibration dampening system that reduces the amount of the vibrations produced by the Diesel engine reaching the system. This consists of rubber anti-vibration feet and couplings. Each Diesel engine-driven pump includes two start-up batteries and a Diesel tank providing 6 hours of continuous operation. Motor pumps with diesel engine cooled by a 37 kW water/water heat exchanger available on request. The Diesel engine has an air/air cooling system for low powers (up to 26 kW), and air/water cooling system for higher powers (37 kW and over). The Diesel engine can operate continuously at full load in accordance with ISO 3046 standards, curve NA (section 10.9.1 of UNI EN 12845).

CONSTRUCTION FEATURES OF THE PUMP

KDN range pump with cast iron single stage spiral body in accordance with DIN-EN 733 (formerly DIN 24255); cast iron seal cover and support. Flanges in accordance to DIN 2533 (DIN 2532 for DN 200). Cast iron impeller, closed and dynamically balanced, with compensation of the axial thrust through balancing holes, operation on interchangeable wear rings (on request). Stainless steel pump shaft supported by two permanently lubricated oversized ball bearings, housed inside an appropriate chamber in the support.

Standard seal device: standardised mechanical seal according to DIN 24960 in carbon/silicon carbide with EPDM OR rings.

COMPENSATION PUMP

All the DAB fire-fighting pump sets are available with or without compensation pump. The compensation pump (JET, KV, or KVC models) intervenes automatically in case of small pressure drops in the fire-fighting system, reinstating the pressure to the required level, and therefore avoiding pointless starts of the main pumps. Installed on the main pump base side, it is connected to the delivery manifold of the main pump, and includes: ball valves on the suction and delivery, check valve on the delivery, pressure switch, 18 litre expansion vessel, protection and control panel.

HYDRAULIC STRUCTURE

The suction of the KDN pump is supplied with flange for the connection to the suction kit (supplied as accessory). The suction kit consists of an eccentric diverter adaptor with opening angle of less than 20 °. The kit can keep the water speed lower than 1,5 m/s, as required by section 10.6.2.3 of the UNI EN 12845 standard. On the delivery side are a concentric diverter adaptor ready for the connection of a 2" union for the connection of the priming tank (positive suction installation), vibration coupling (in the Diesel version), Inspectable clapet non-return valve and circuit with no. 2 start-up pressure switches with test valve for the same, shut-off valve (with manual reducer from DN125) and RAL3000 red painted steel delivery manifold ready for the connection of the compensation pump and expansion vessel* (**expansion vessels are guaranteed for 5 years**).

(*Supplied as standard only in the versions with compensation pump).

ELECTRIC CONTROL BOX

Fire-fighting pump sets include an electric control panel for each pump, connected to the main components (motor, pressure switches, sensors, batteries, etc.).

ELECTRIC PUMP CONTROL PANEL

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH STANDARDIZED CENTRIFUGAL PUMPS



TECHNICAL DATA

Nominal power input voltage: 400 V +/- 5%

Phases: 3

Frequency: 50-60 Hz

Number of pumps that can be connected: 1

Maximum nominal power of use:
from 3 to 110 kW (depending on model).

Maximum nominal current of use: from 10 Amp to 250 Amp.

Ambient temperature operation limits: from +4 °C to +40 °C

Relative humidity (without condensation):

50% at 40 °C MAX (90% a 20 °C)

Max. altitude: 3000 m (a.s.l.)

Protection class: IP55

Control panel construction:

According to EN60204, EN 60439-1, and UNI EN 12845/10779

COMPONENTS

The control and protection panel includes the following components

INTERIOR OF CABINET

Connector for the powering of a GSM Modem (230 V, protected by fuse).

Motor protection fuses (aM type); current surge relay-motor protectors are not permitted by the standard.

Auxiliary circuit protection fuses (Gg type).

Direct pump starters (up to 15 kW).

Star/triangle starters (18,5 kW and over).

24 V auxiliary circuit transformers.

Alarm relay with terminal box for remote status control (as required by the UNI EN 12845 standard).

System start-up input connection terminal box.

ON FRONT PANEL

Electric pump control unit with:

Multifunction instrument with display (voltmeter, ammeter, cosfi metre, wattmeter, alarms and status).

Start and stop pushbuttons.

Status and alarm notification lamps.

Alarm/notification lamp test pushbutton.

0 - 1 selector (0 = automatic disabled; 1 = automatic on), key removable only for position one (AUTOMATIC ON).

REMOTELY CONTROLLED ALARMS:

Voltage present.

Phase sequence.

Pump start request from the pressure switches.

Pump start request from priming tank.

Pump in operation.

Start failed.

The above alarms can be remotely controlled in the following ways:

With relay wiring to the alarm monitoring control panel.

With RS-485 wiring to the alarm monitoring control panel.


With GSM Modem inside the cabinet alarm monitoring, for forwarding status and/or alarm signals (optional).

ELECTRIC PUMP CONTROL PANEL

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH STANDARDIZED CENTRIFUGAL PUMPS

ELECTRIC PUMP CONTROL UNIT

The A1 electronic control unit supplied with the control panel offers the following features: automatic start from the pressure switches or the priming float switch, manual start, automatic monitoring of pump set faults and incorrect or unavailable power input voltage.

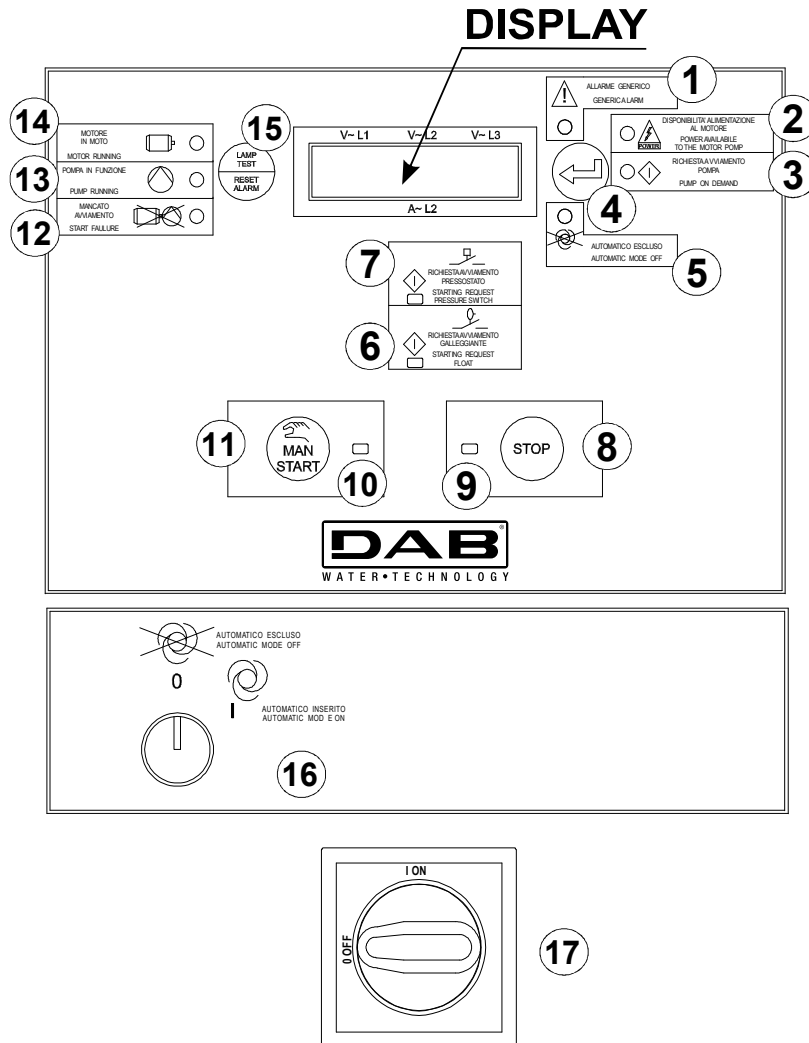

**ALIMENTAZIONE DELLA POMPA SPRINKLER
NON SPEGNERE IN CASO DI INCENDIO**

**SPRINKLER PUMP MOTOR SUPPLY
NOT TO BE SWITCHED OF IN THE EVENT OF FIRE**

REF.	FUNCTION
1	LAMP - Generic alarm
2	LAMP - Power input to the motor detected
3	LAMP - Pump START request
4	Press to display the instruments
5	LAMP - Automatic start disabled
6	LAMP - START request from the priming tank float switch
7	LAMP - START request (call) from the pressure switches
8	MANUAL STOP pushbutton
9	LAMP - MANUAL STOP with STOP pushbutton notification

REF.	FUNCTION
10	LAMP - MANUAL START with MAN START pushbutton notification
11	MANUAL START pushbutton
12	LAMP - Start failed
13	LAMP - ELECTRIC PUMP RUNNING with motor running; detected by the electric pump running pressure switch
14	LAMP - MOTOR RUNNING; controlled by the ammeter detection
15	Reset lamp test pushbutton
16	Automatic mode disabling selector
17	Power input disconnection switch

DIESEL PUMP CONTROL PANEL

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH STANDARDIZED CENTRIFUGAL PUMPS



TECHNICAL DATA

Nominal power input voltage: 230V +/- 5%

Phases: 1+N

Frequency: 50-60 Hz

Number of pumps that can be connected: 1

Maximum nominal power of use:

from 7,5 to 197 kW (Diesel motor power)

Nominal power absorbed by the users:

approximately 790 W (3 Amp) at full load, 16 Amp power input line

Ambient temperature operation limits: from +4 °C to +40 °C

Relative humidity (without condensation):

50% at 40 °C MAX (90% a 20 °C)

Max. altitude: 3000 m (a.s.l.)

Protection class: IP55

Control panel construction:

According to EN60204, EN 60439-1, and UNI EN 12845/10779

DIESEL PUMP CONTROL PANEL

COMPONENTS

The control and protection panel includes the following components

INTERIOR OF CABINET

Connector for the powering of a GSM Modem (12V, protected by fuse).

Auxiliary circuit protection fuses (Gg type).

2 x 12 V Diesel engine start relays (for 12 V starter motors with powers up to 145 kW).

2 x 24 V Diesel engine start relays (for 24 V starter motors with powers over 145 kW).

2 automatic battery chargers.

Alarm relay with terminal box for remote status control (as required by the UNI EN 12845 standard).

System start-up input connection terminal box.

ON FRONT PANEL

Diesel pump control unit with:

Multifunction instrument with display (voltmeter, ammeter, revolution counter, hours of operation counter, Diesel percentage level, oil pressure).

Start and Stop pushbuttons (one for each battery).

Status and alarm notification lamps.

Lamp test pushbutton.

First start-up TEST pushbutton (*).

Breakable glass protected rocker switch for pump start, bypassing the control unit in case of fault.

0 - 1 selector (0 = automatic disabled; 1 = automatic on), key removable only for position one (AUTOMATIC ON).

REMOTELY CONTROLLED ALARMS

Voltage present.

Phase sequence.

Pump start request from the pressure switches.

Pump start request from priming tank.

Pump in operation.

Start failed.

The above alarms can be remotely controlled in the following ways:

With relay wiring to the alarm monitoring control panel (optional).

With RS-485 wiring to the alarm monitoring control panel (optional).

With GSM Modem inside the cabinet, for forwarding status and/or alarm signals (optional).

The control panel receives the signal from the pressure switches and starts the engine-driven pump also when no power network voltage is detected. The pump running status is detected through the speed/revolution sensor signal (as required by section 10.9.8 of UNI EN 12845). The panel is equipped with a start-up system with two 12V batteries (as required by section 10.9.8. of UNI EN 12845). If one of the batteries is faulty, the panel automatically starts the pump up using the other battery (6 alternated starts).

(* When the engine-driven pump is put into operation on site for the first time, it will be necessary to check the start failure alarm (in accordance with section 10.9.12.2 of UNI EN 12845). For this purpose, on the front of the control panel is a TEST pushbutton that simulates no. 6 alternate start attempts on the two batteries, if there is no fuel. At the end of the TEST, the start failure alarm activates (lamp + N.O. contact)



DIESEL PUMP CONTROL PANEL

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH STANDARDIZED CENTRIFUGAL PUMPS

DIESEL ENGINE-DRIVEN PUMP CONTROL UNIT

The A1 electronic pump control unit supplied with the control panel offers the following features: automatic start with 6 alternate pulses on the 2 batteries, with starter gear engaged check, manual start, battery efficiency check, particularly during start-up, automatic monitoring of pump set faults and display of battery charge signals.

DISPLAY

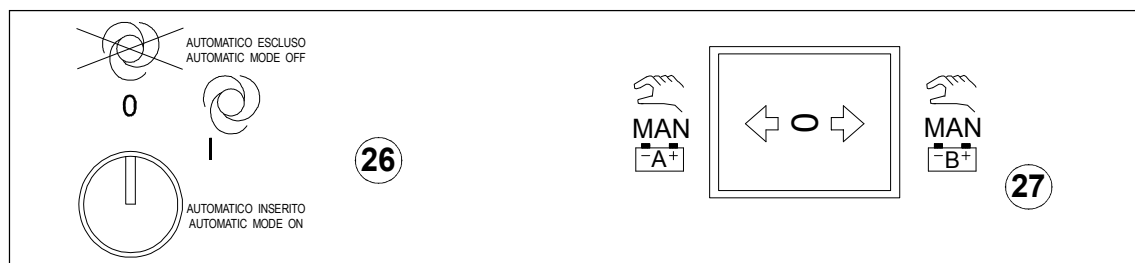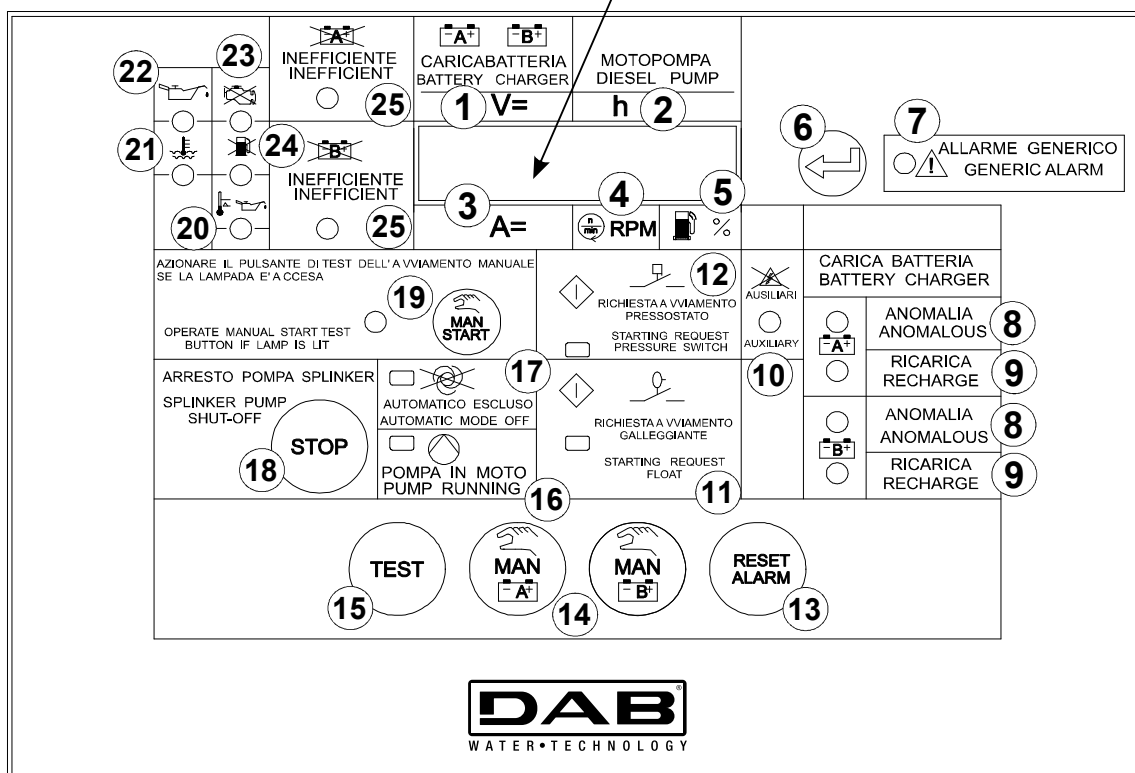

REF.	FUNCTION
1	A and B battery charger voltmeters
2	Hour meter
3	A and B battery charger ammeters
4	Hour meter
5	Fuel level gauge
6	- Press briefly to show instruments - Press and hold down for LED test
7	Generic alarm
8	Fault detected by the battery charger during battery charging
9	Battery charger ON
10	No power input to the battery charger detected alarm
11	Start request from the pump priming tank flow switch
12	START request (call) from the pressure switches
13	Fault reset



REF.	FUNCTION
14	Manual engine-driven pump start using batteries A and B (always active)
15	Start-up test
16	Engine-driven pump running
17	Automatic mode disabled
18	Engine-driven pump set stop pushbutton
19	Manual start test pushbutton and lamp
20	Oil or water heater not heating
21	Overtemperature alarm
22	Insufficient oil pressure alarm
23	Start failed alarm
24	Low fuel alarm
25	Faulty A and B battery alarm
26	Automatic mode disabling selector
27	Breakable glass protected pushbutton for emergency start of battery A or B

1 KDN COMPACT

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH STANDARDIZED CENTRIFUGAL PUMPS

UNI EN 12845 SET COMPONENTS - ELECTRIC PUMP + JOCKEY PUMP

----- element not supplied in the kit (to be purchased separately)

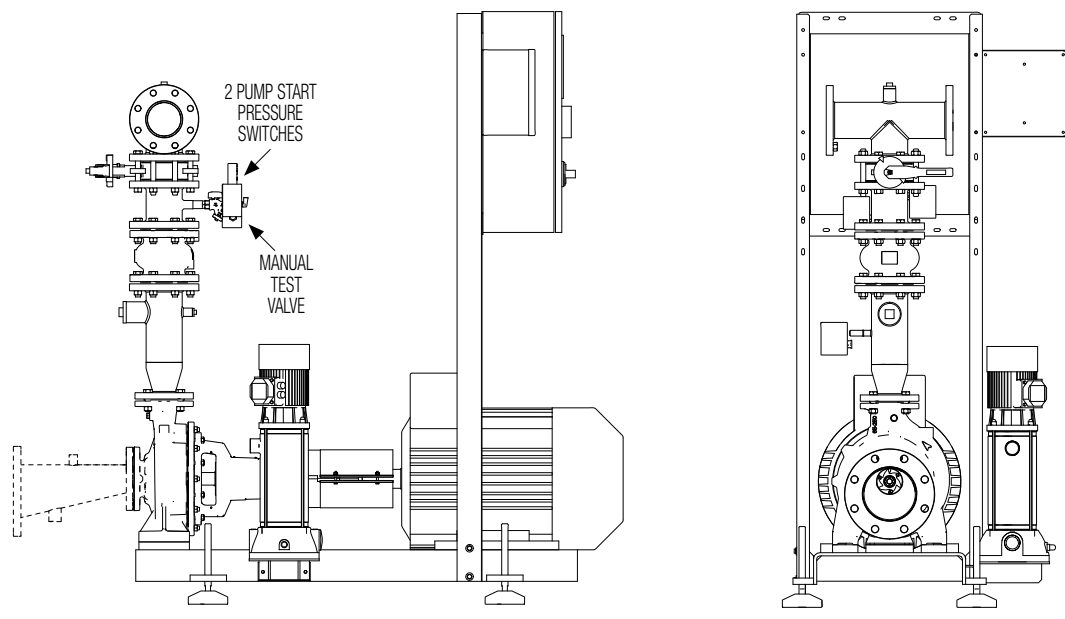
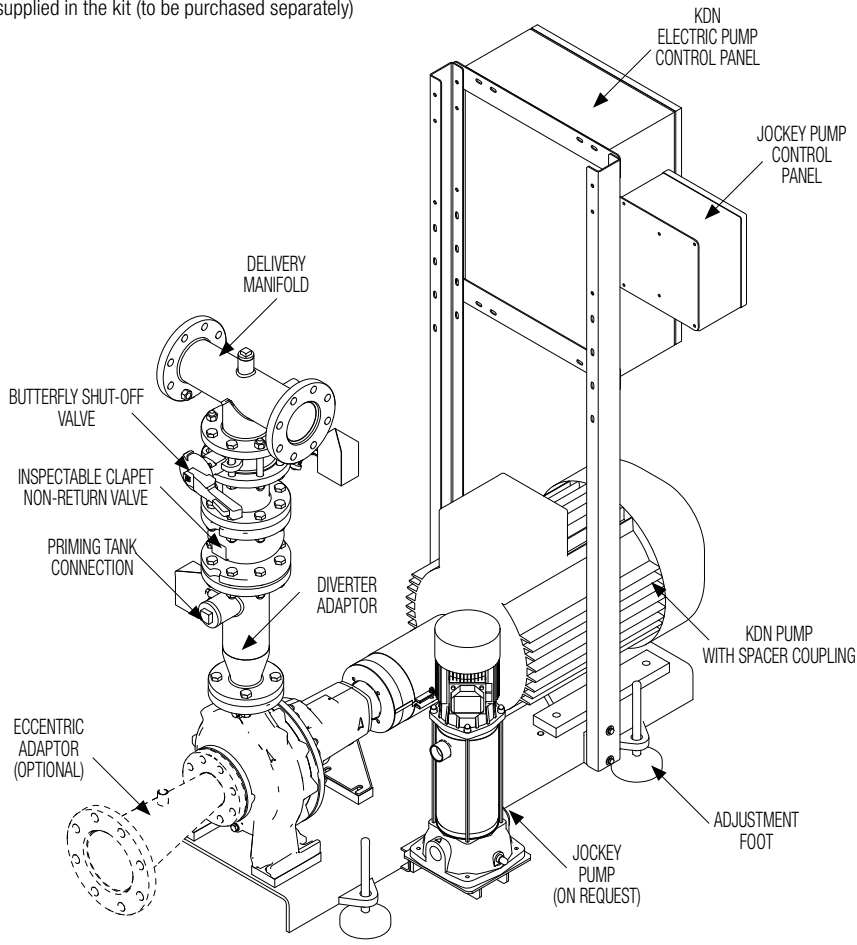


1 KDN COMPACT

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH STANDARDIZED CENTRIFUGAL PUMPS

UNI EN 12845 SET COMPONENTS - ENGINE-DRIVEN PUMP SET

----- element not supplied in the kit (to be purchased separately)

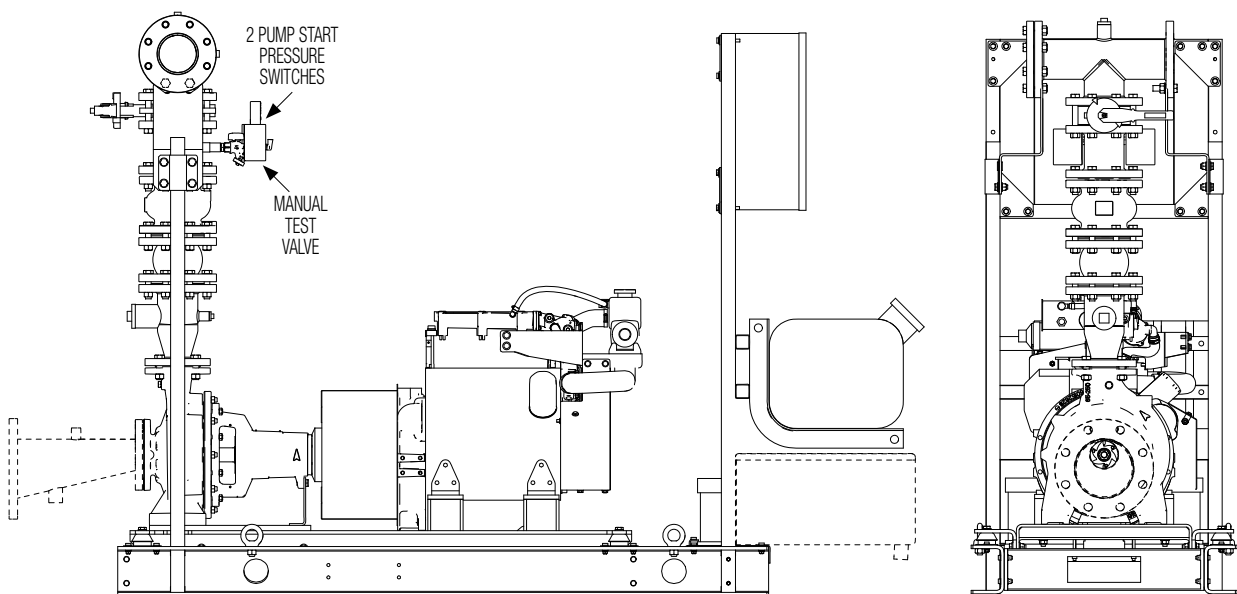
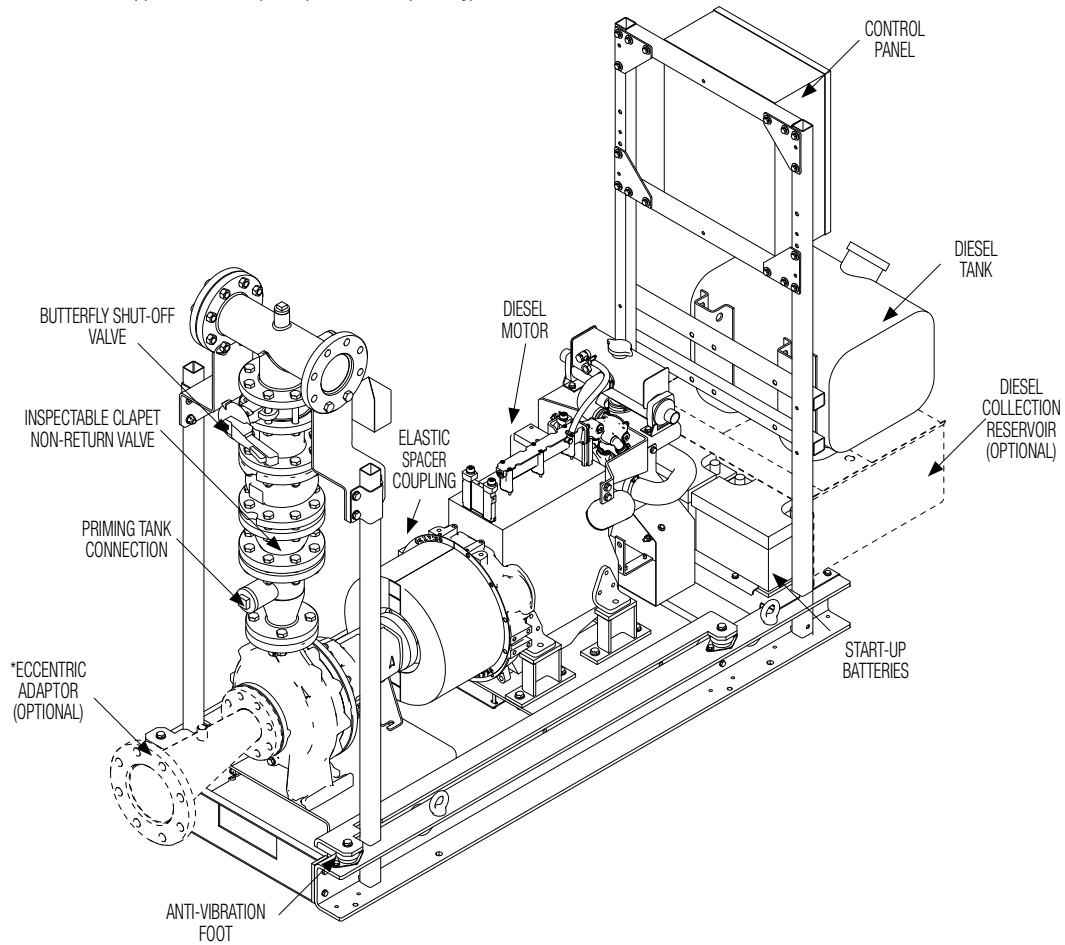


1 KDN COMPACT

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH STANDARDIZED CENTRIFUGAL PUMPS

UNI EN 12845 SET COMPONENTS - ELECTRIC PUMP SET + ENGINE-DRIVEN PUMP SET

----- element not supplied in the kit (to be purchased separately)

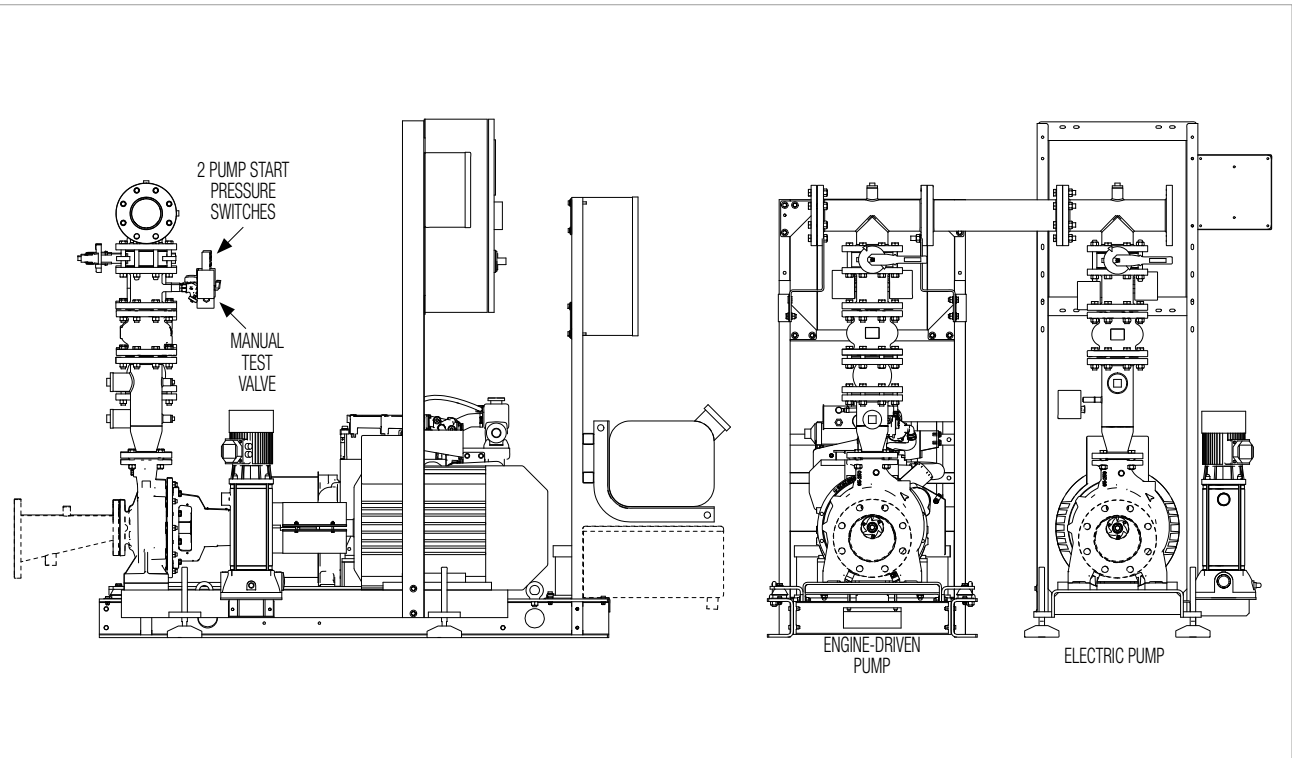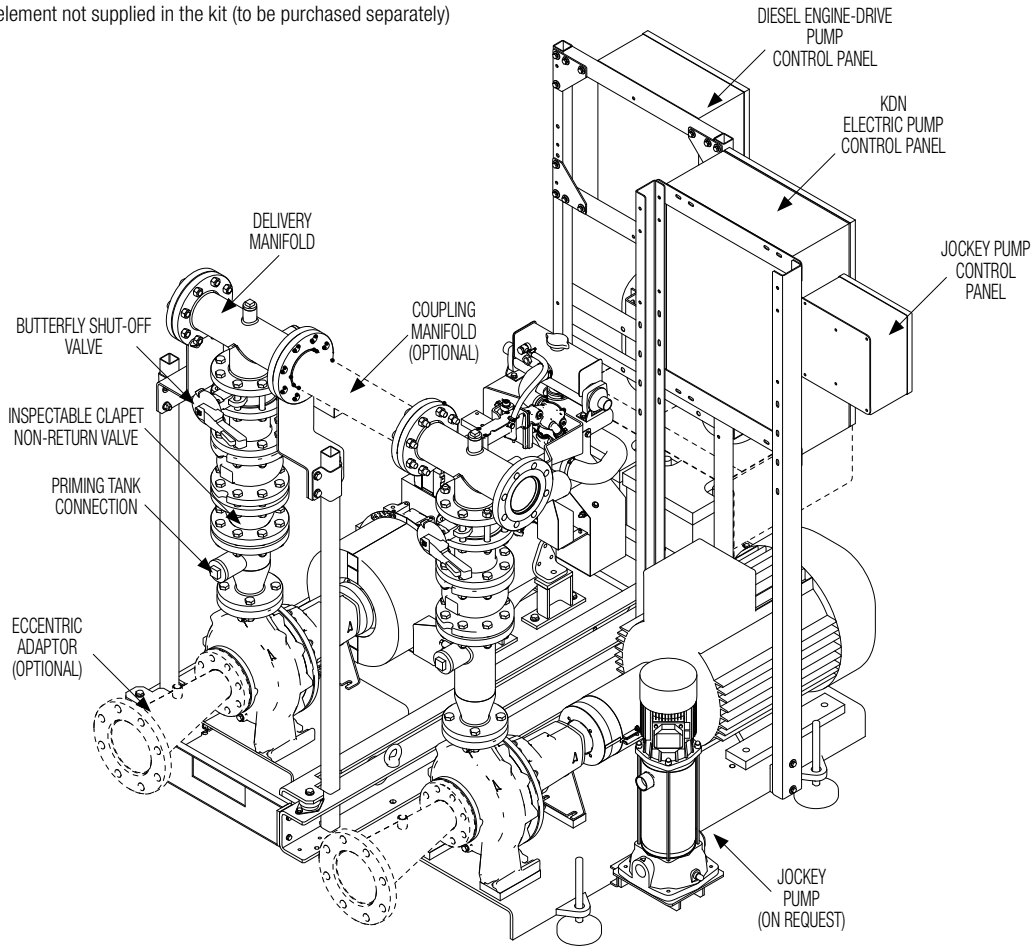


1 KDN COMPACT

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH STANDARDIZED CENTRIFUGAL PUMPS

ACCESSORIES

PRIMING TANK FOR POSITIVE SUCTION INSTALLATION



One 500 l priming tank must be installed for each main pump.

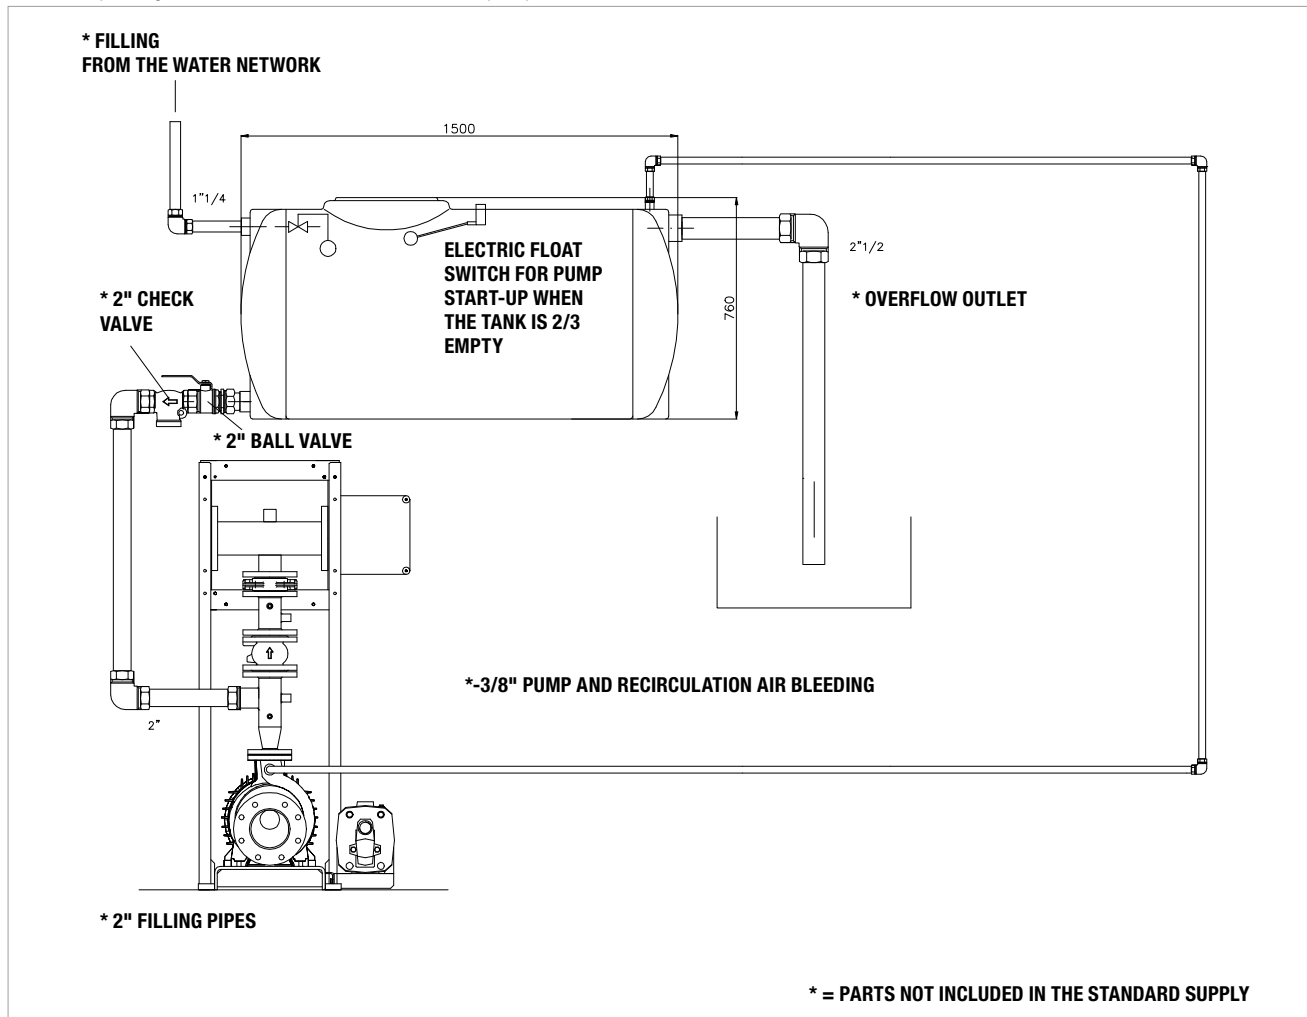

FLOW SWITCH KIT

The flow switch detects the activation of the sprinklers of the pump house (UNI EN 12845 10.3.2).

The flow switch kit must be installed on the 1" pipe of the delivery manifold of the DAB fire-fighting pump, and then connected to the CSR-1 alarm control panel.

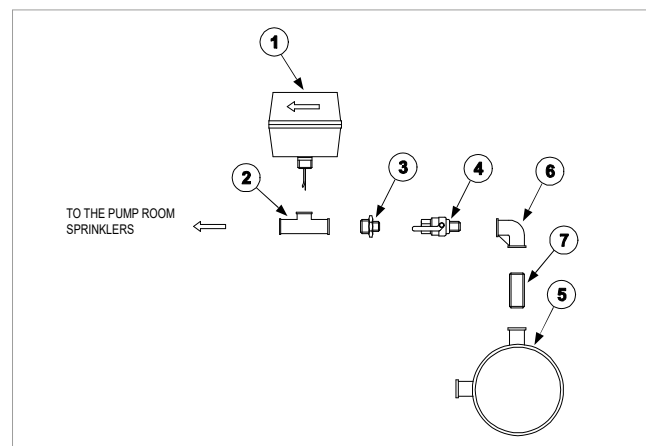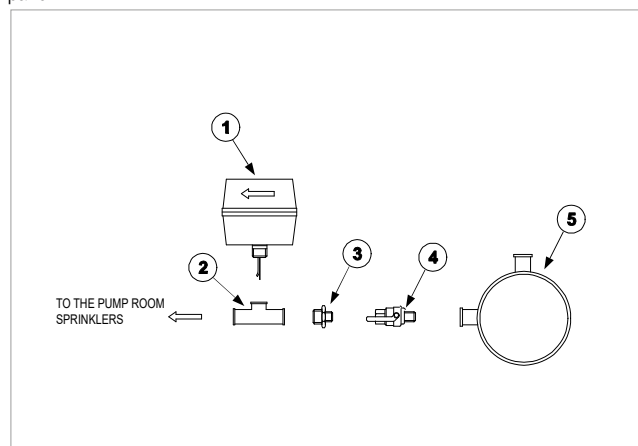


- The flow switch kit must be installed on the 1" pipe of the delivery manifold of the DAB fire-fighting pump. Seal the threads of the various components with Teflon, plumber's hemp, or anaerobic sealing paste.
- The flow switch detects activation of the sprinklers of the pump house as per section 10.3.2 of UNI EN 12845.
- The Normally Open contact of the 1" flow switch must be connected to an alarm device installed in a manned location (e.g. DAB alarm control panel – CSR-1 model, UNI EN 12845).

1 KDN COMPACT


UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH STANDARDIZED CENTRIFUGAL PUMPS

EXAMPLE OF ASSEMBLY OF UNI EN 12845 SETS - ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP SET

----- element not supplied in the kit (to be purchased separately)

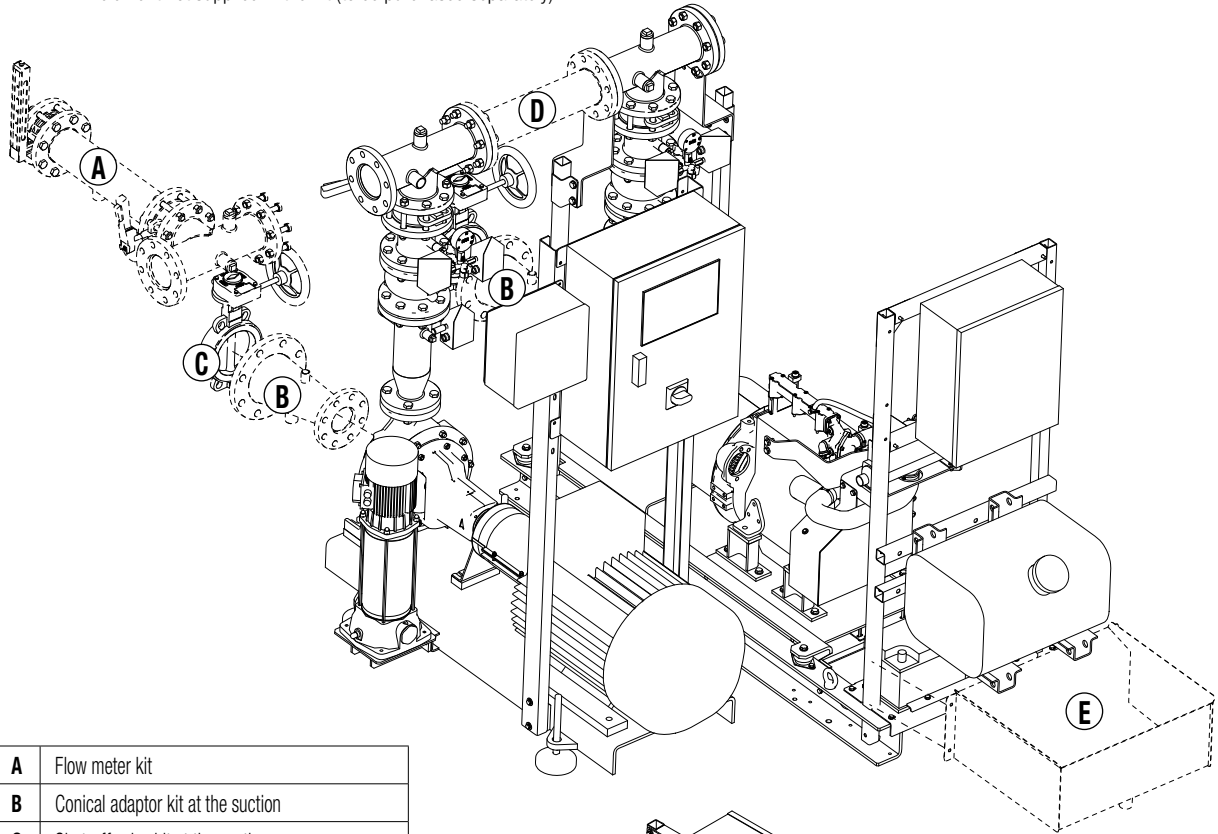

A	Flow meter kit
B	Conical adaptor kit at the suction
C	Shut-off valve kit at the suction
D	Coupling kit (versions with several pumps only)
E	Diesel collection reservoir

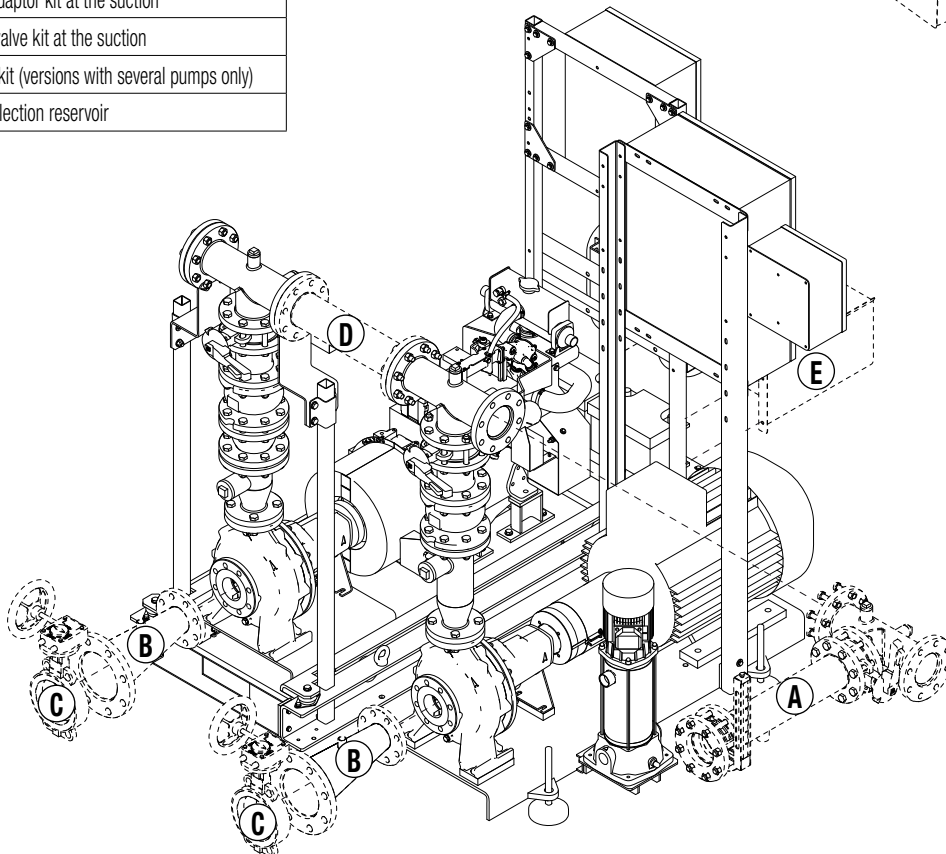


1 KDN COMPACT

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH STANDARDIZED CENTRIFUGAL PUMPS

ACCESSORIES

SUCTION KIT

The kit consists of a conical eccentric adaptor, screws and washers. It is required in order to avoid air pockets at the suction, and to keep the water speed below 1,5 m/s, as required by section 10.6.2.3 of UNI EN 12845. No. 1 kit must be installed at the suction of each main pump.

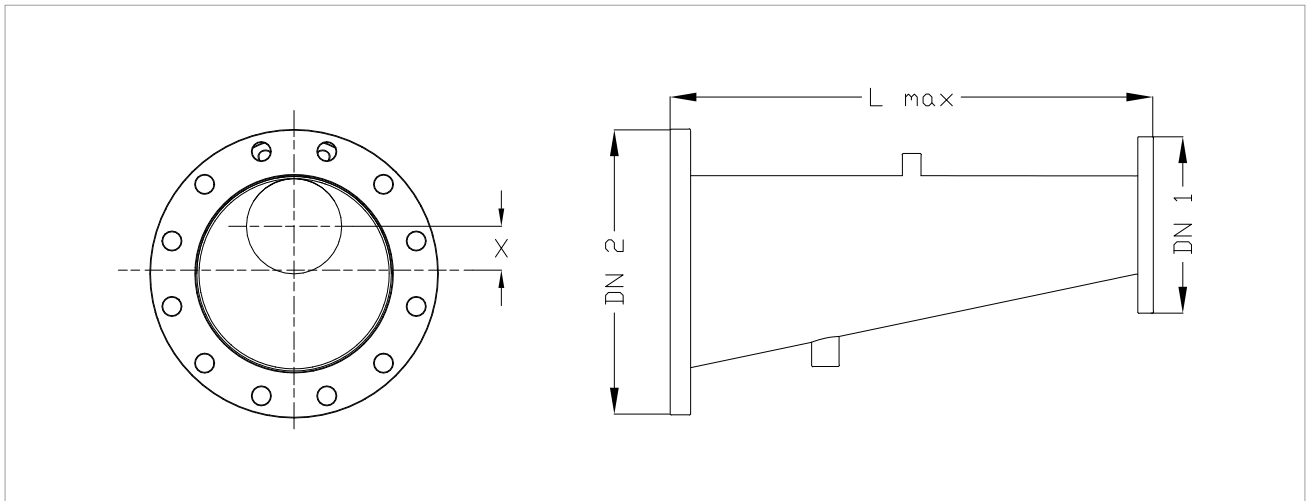

UNI EN 12845 ECCENTRIC SUCTION ADAPTORS					
PUMP MODEL	ADAPTOR MODEL	DN1 –PN 16 PUMP SIDE	DN2 – PN16 SYSTEM SIDE	L (mm)	X (mm)
NKV 10	KIT ASP.NKV10 EN12845 (DN65 - 19°)	DN 40	DN 65*	145	14
NKV 15 – NKV 20 KDN 32	KIT ASP.KDN32/NKV15-20 EN12845(DN80-19°)	DN 50	DN 80	200	14
KDN 40	KIT ASP.KDN40 EN12845 (DN100 - 19°)	DN 65	DN 100	204	19
KDN 50	KIT ASP.KDN50 EN12845 (DN125 - 19°)	DN 65	DN 125	320	32
KDN 65	KIT ASP.KDN65 EN12845 (DN150 - 19°)	DN 80	DN 150	380	40
KDN 80	KIT ASP.KDN80 EN12845 (DN200 - 19°)	DN 100	DN 200	570	52
KDN 100	KIT ASP.KDN100 EN12845 (DN250 - 19°)	DN 125	DN 250	685	67

*The standard requires DN 80 minimum for positive suction installations. In this case contact our sales network.



1 KDN COMPACT

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH STANDARDIZED CENTRIFUGAL PUMPS



ACCESSORIES

FLOW METER

To be installed on a branch on the delivery manifold. The kits are suitable for both 1-pump and 2-pump sets, and are supplied unassembled.

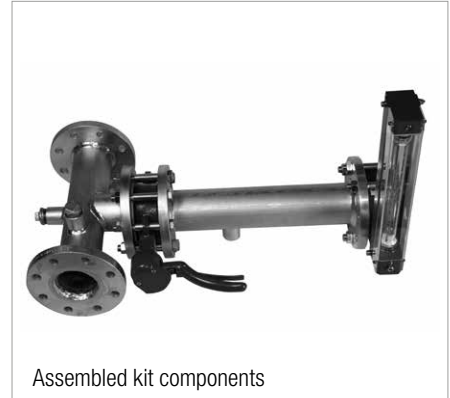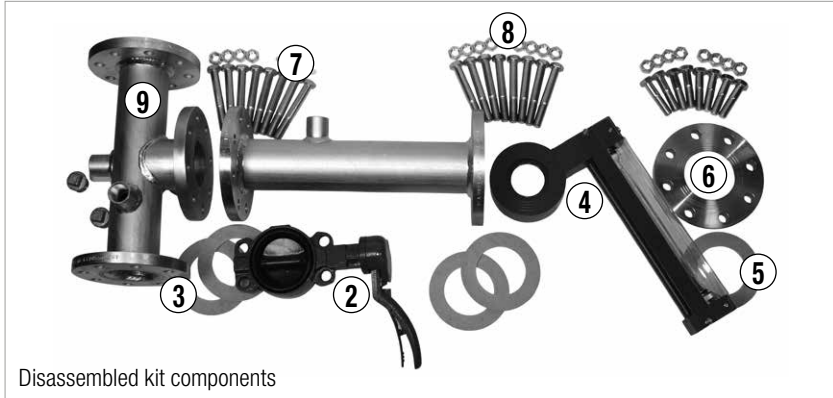

ASSEMBLY INDICATIONS FOR UNI EN 12845 1 AND 2 PUMP SETS (EXAMPLE)

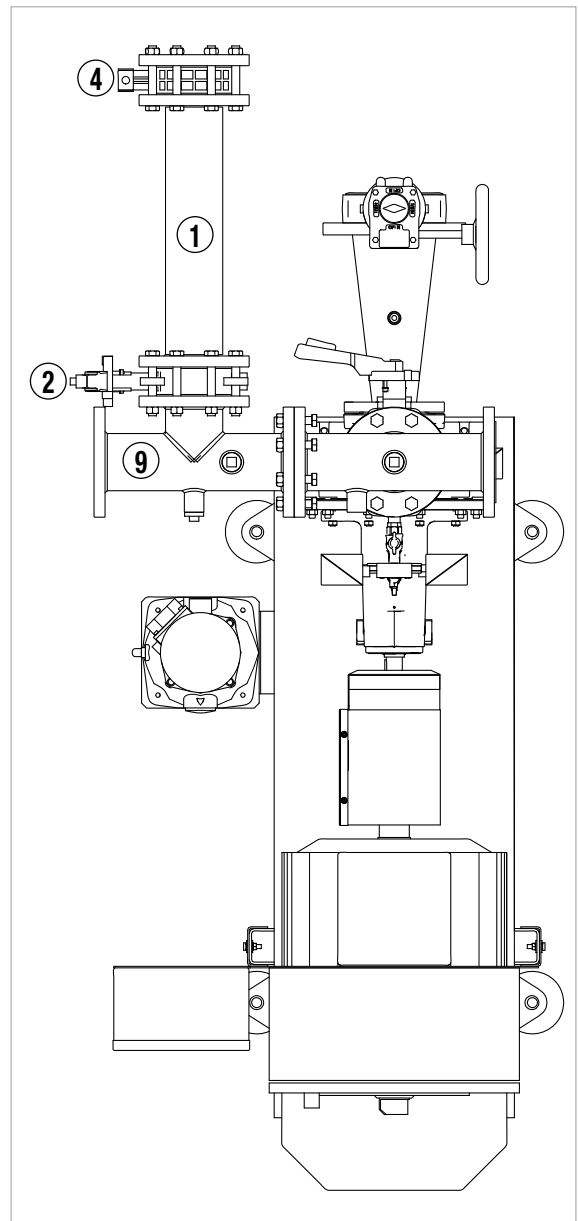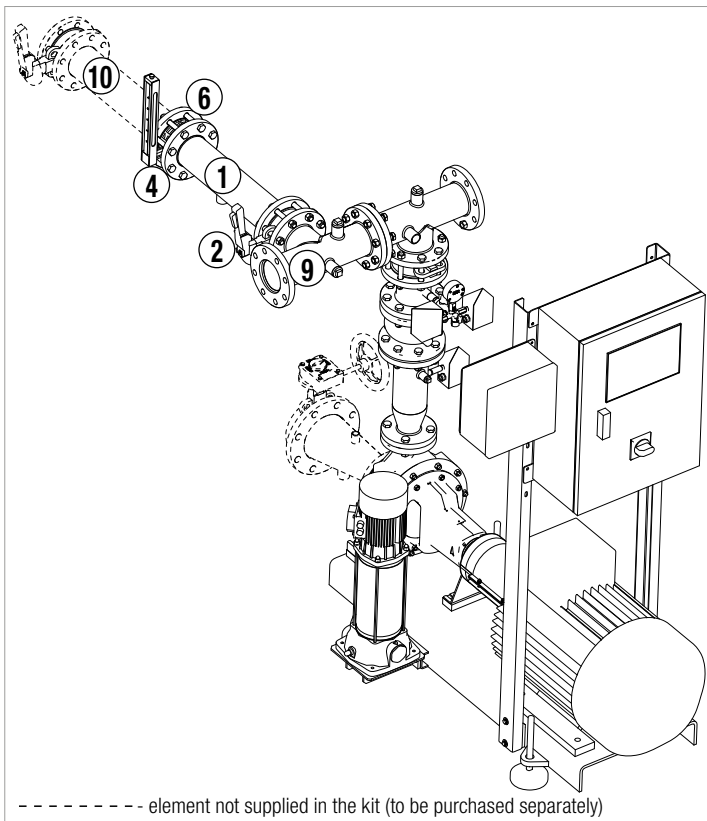

1	Flow meter extension
2	Butterfly valve
3	Butterfly valve seal
4	Flow meter - flow rate meter
5	Flow meter seals
6	Counter flanges
7	Fixing screws
8	Nuts
9	Meter adaptor


1 KDN COMPACT

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH STANDARDIZED CENTRIFUGAL PUMPS

- 1 KDN 32 → DN 50 L = 250 min.
- 1 KDN 40 → DN 65 L = 325 min.
- 1 KDN 50 → DN 80 L = 400 min.
- 1 KDN 65 → DN 100 L = 500 min.
- 1 KDN 80 → DN 125 L = 625 min.
- 1 KDN 100 → DN 150 L = 750 min.


-----element not supplied in the kit (to be purchased separately)

Fit the meter with the scaled pipe in the VERTICAL position

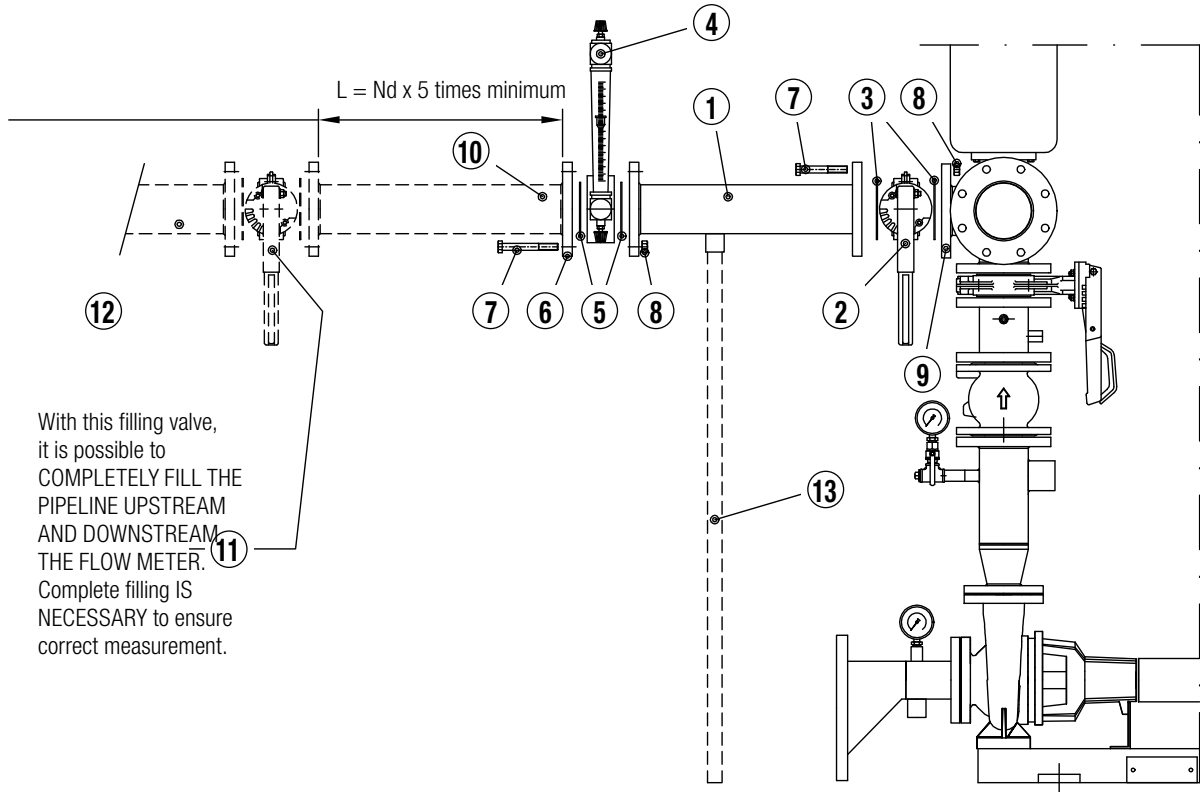

With this filling valve, it is possible to COMPLETELY FILL THE PIPELINE UPSTREAM AND DOWNSTREAM THE FLOW METER. Complete filling IS NECESSARY to ensure correct measurement.

----- : fire-fighting set

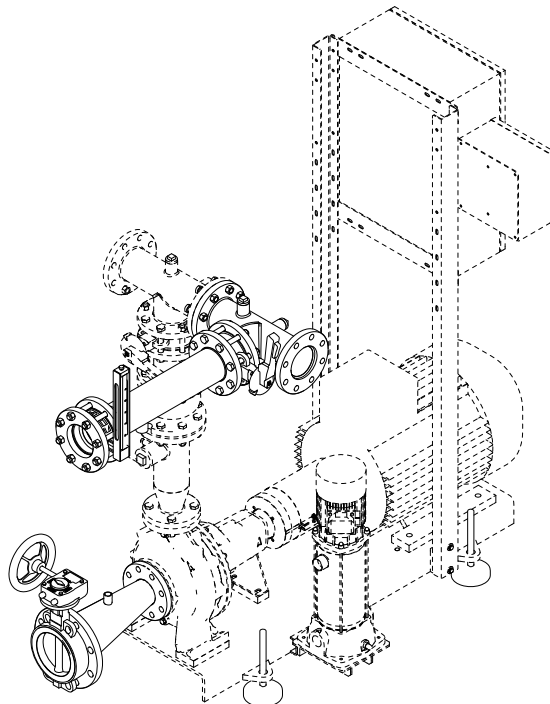

E.FIRE MONITOR

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH STANDARDIZED CENTRIFUGAL PUMPS



TECHNICAL DATA

Nominal power input voltage: 230/400 Vac +/-10% (power input voltage 230 Vac)

Phases: 1+N (230 V) 1+1 (400 V)

Frequency: 50-60 Hz

Sound power level: 75 dB at 30 cm 12 Vdc

Absorption: 0,1 Amp

Battery type: 12 V 1.2 Ah lead battery, sealed, Faston contact

Acoustic alarm autonomy in case of power cut: 5 hours

Characteristic features of the serial communication cable:

2 twisted wire shielded cable plus shield, 600 V, class 1, 15-18 AWG

Maximum impedance 120 ohm, maximum capacity 50 pF/m

Ambient temperature operation limits: -10 °C + 50 °C

Relative humidity: 50 % at 40 °C MAX (90 % at 20 °C) without condensation

Max. altitude: 2000m (asl)

Protection class: IP54

Construction: Max RS485 line length 500 m

ACCESSORY - E.FIRE MONITOR CONTROL PANEL

The UNI EN 12845 standard requires that a range of alarms are forwarded to a permanently manned location, inside or outside the building, or to a plant manager.

In order to fulfil this requirement of the UNI EN 12845 standard, it is possible to use the E.FIRE MONITOR alarm control unit, which notifies the operating conditions of the fire-fighting pump station by means of an acoustic signal.

The E.FIRE MONITOR alarm control unit can be connected to the fire-fighting pump station using a telephone pair (485 serial type connection), to the electric or diesel engine-driven pump control panels.

One single E.Fire Monitor can control up to three pump sets, electric or Diesel, in the various required configurations.

FUNCTIONS

The control unit visually and acoustically notifies, by LED and buzzer respectively, the operating conditions of the pump sets in the different installation solutions:

- all the possible combinations with up to three pumping units maximum


E.Fire Monitor is a necessary accessory for the supervision of remote alarms, and guarantees autonomy of at least 5 hours, as far as the operation of the alarms, in case of electric power cuts. It is also possible to connect a GSM Modem (optional), in order to display alarms on a mobile phone, receiving system status SMS messages.

Alarms may be replicated at two different positions by connecting two E.Fire Monitors.

E.FIRE MONITOR

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH STANDARDIZED CENTRIFUGAL PUMPS

DIAGRAM FOR THE CONNECTION OF E.FIRE MONITOR TO THE CONTROL PANELS ELECTRIC OR ENGINE-DRIVEN PUMP WITH SERIAL CONNECTION

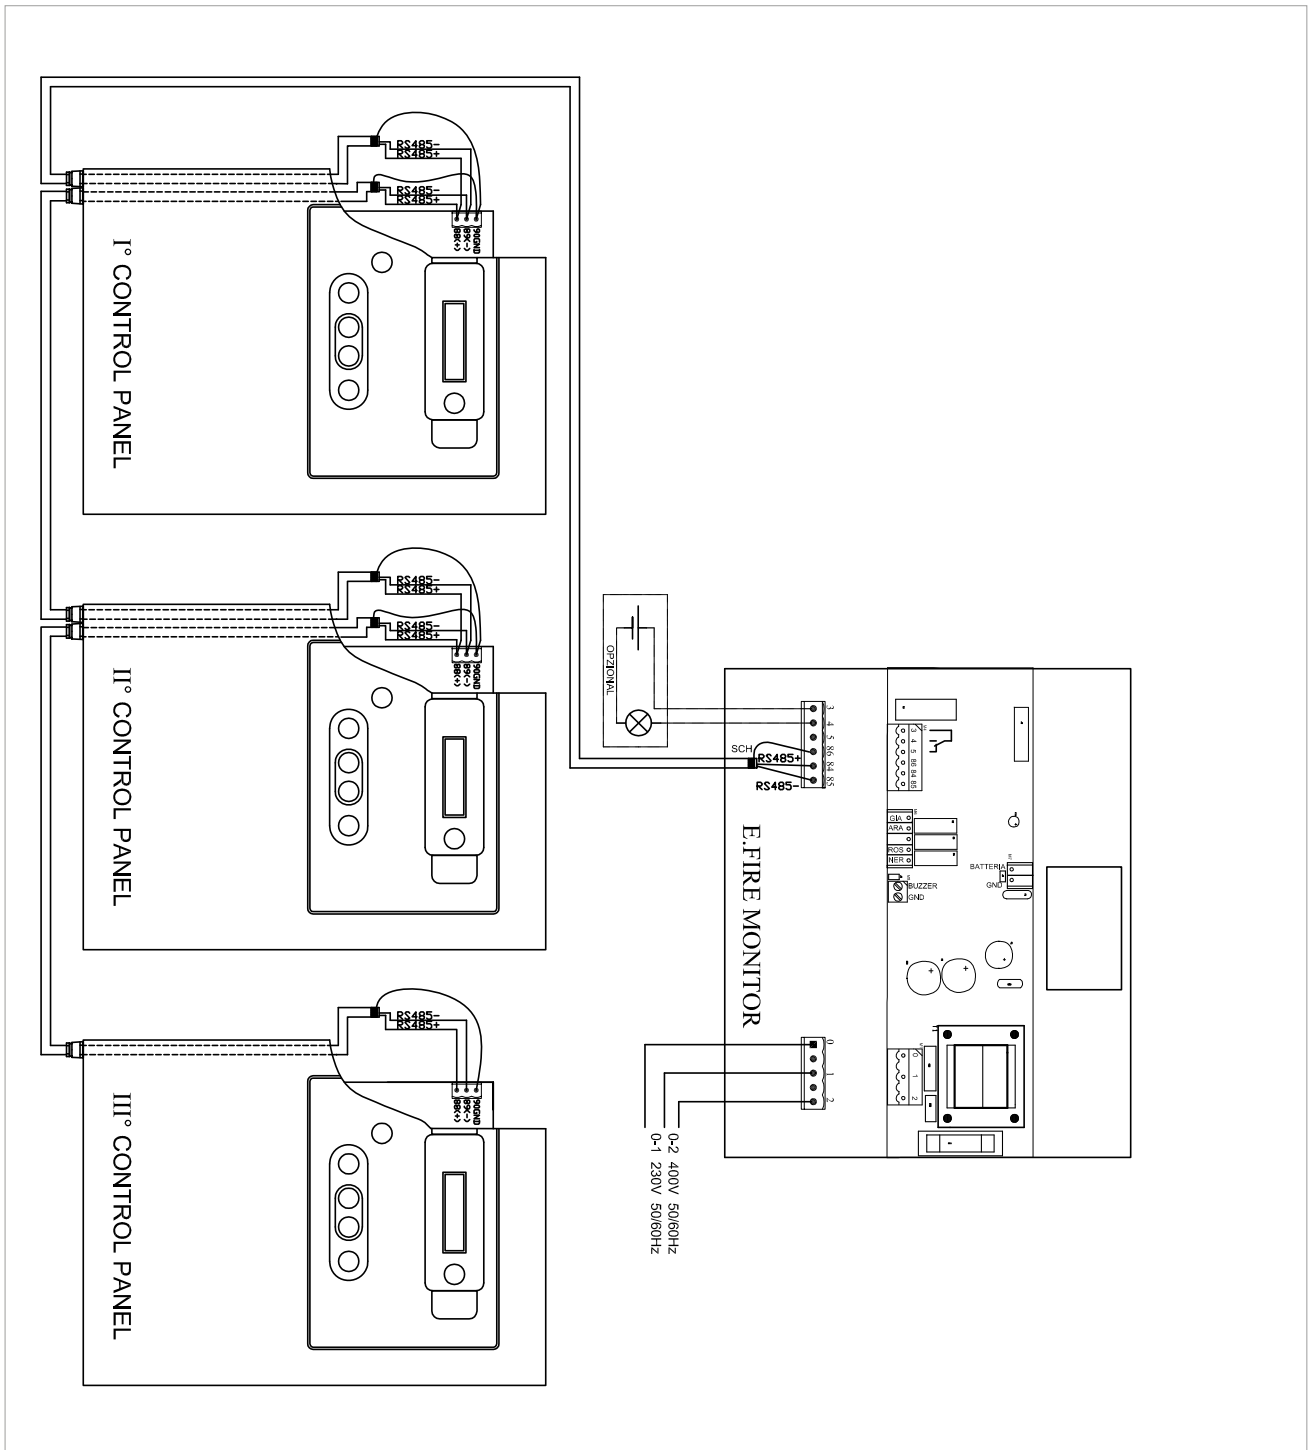

1 KDN COMPACT

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH STANDARDIZED CENTRIFUGAL PUMPS



TECHNICAL DATA

Nominal power input voltage: 230 AC +/- 10%

Phases: 1

Frequency: 50-60 Hz

Sound power level: 75 dB A

Absorption: 0,1 Amp

Battery type: 12 V; 2,3 Ah lead battery (Faston output)

Acoustic alarm autonomy in case of power cut: 20 hours

Characteristic features of the serial communication cable:

2 twisted wire shielded cable plus shield, 600 V, class 1, 15-18 AWG

Maximum impedance 120 ohm, maximum capacity 50 pF/m

Ambient temperature operation limits: -10 °C + 40 °C

Relative humidity: 50 % at 40 °C MAX (90 % at 20 °C) without condensation

Max. altitude: 2500 m (a.s.l.)

Protection class: IP55

Construction: According to UNI EN 12845

ACCESSORY - CSR-1 ALARM CONTROL PANEL

The UNI EN 12845 standard requires that a range of alarms are forwarded to a permanently manned location, inside or outside the building, or to a plant manager.

In order to fulfil this requirement of the UNI EN 12845 standard, it is possible to use the CSR-1 alarm control panel, which notifies the operating conditions of the fire-fighting pump stations by means of an acoustic signal.

The CSR-1 alarm control unit can be connected to the fire-fighting pump station using multi-conductor cables (contact connection), or using a telephone pair (485 serial type connection), to the electric or Diesel engine-driven pump control panels.

One single CSR-1 can control one or both pumps, electric or Diesel, in the various required configurations.

FUNCTIONS

The control unit controls and notifies, using a 2x16 character display - visually by means of LEDs, and acoustically by means of a buzzer -, the operating conditions of the pump sets in the different installation solutions:

- system for one electric pump,
- system for two electric pumps,
- system for electric pump and Diesel pump,
- system for Diesel pump,
- system for two Diesel pumps.


The CSR-1 is a necessary accessory for the supervision of remote alarms, and guarantees autonomy of at least 20 hours as far as the operation of the alarms in case of power cuts from the electricity network. It is also possible to connect a GSM Modem (optional) in order to display alarms on a mobile phone, receiving system status SMS messages.

It is possible to remotely forward a cumulative signal of all the alarms using one output (XC9) with clean contact (without voltage) with remote silencing.

1 KDN COMPACT

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH STANDARDIZED CENTRIFUGAL PUMPS


DIAGRAM FOR SERIAL CONNECTION OF THE CSR-1 TO THE ELECTRIC AND DIESEL PUMP CONTROL PANELS

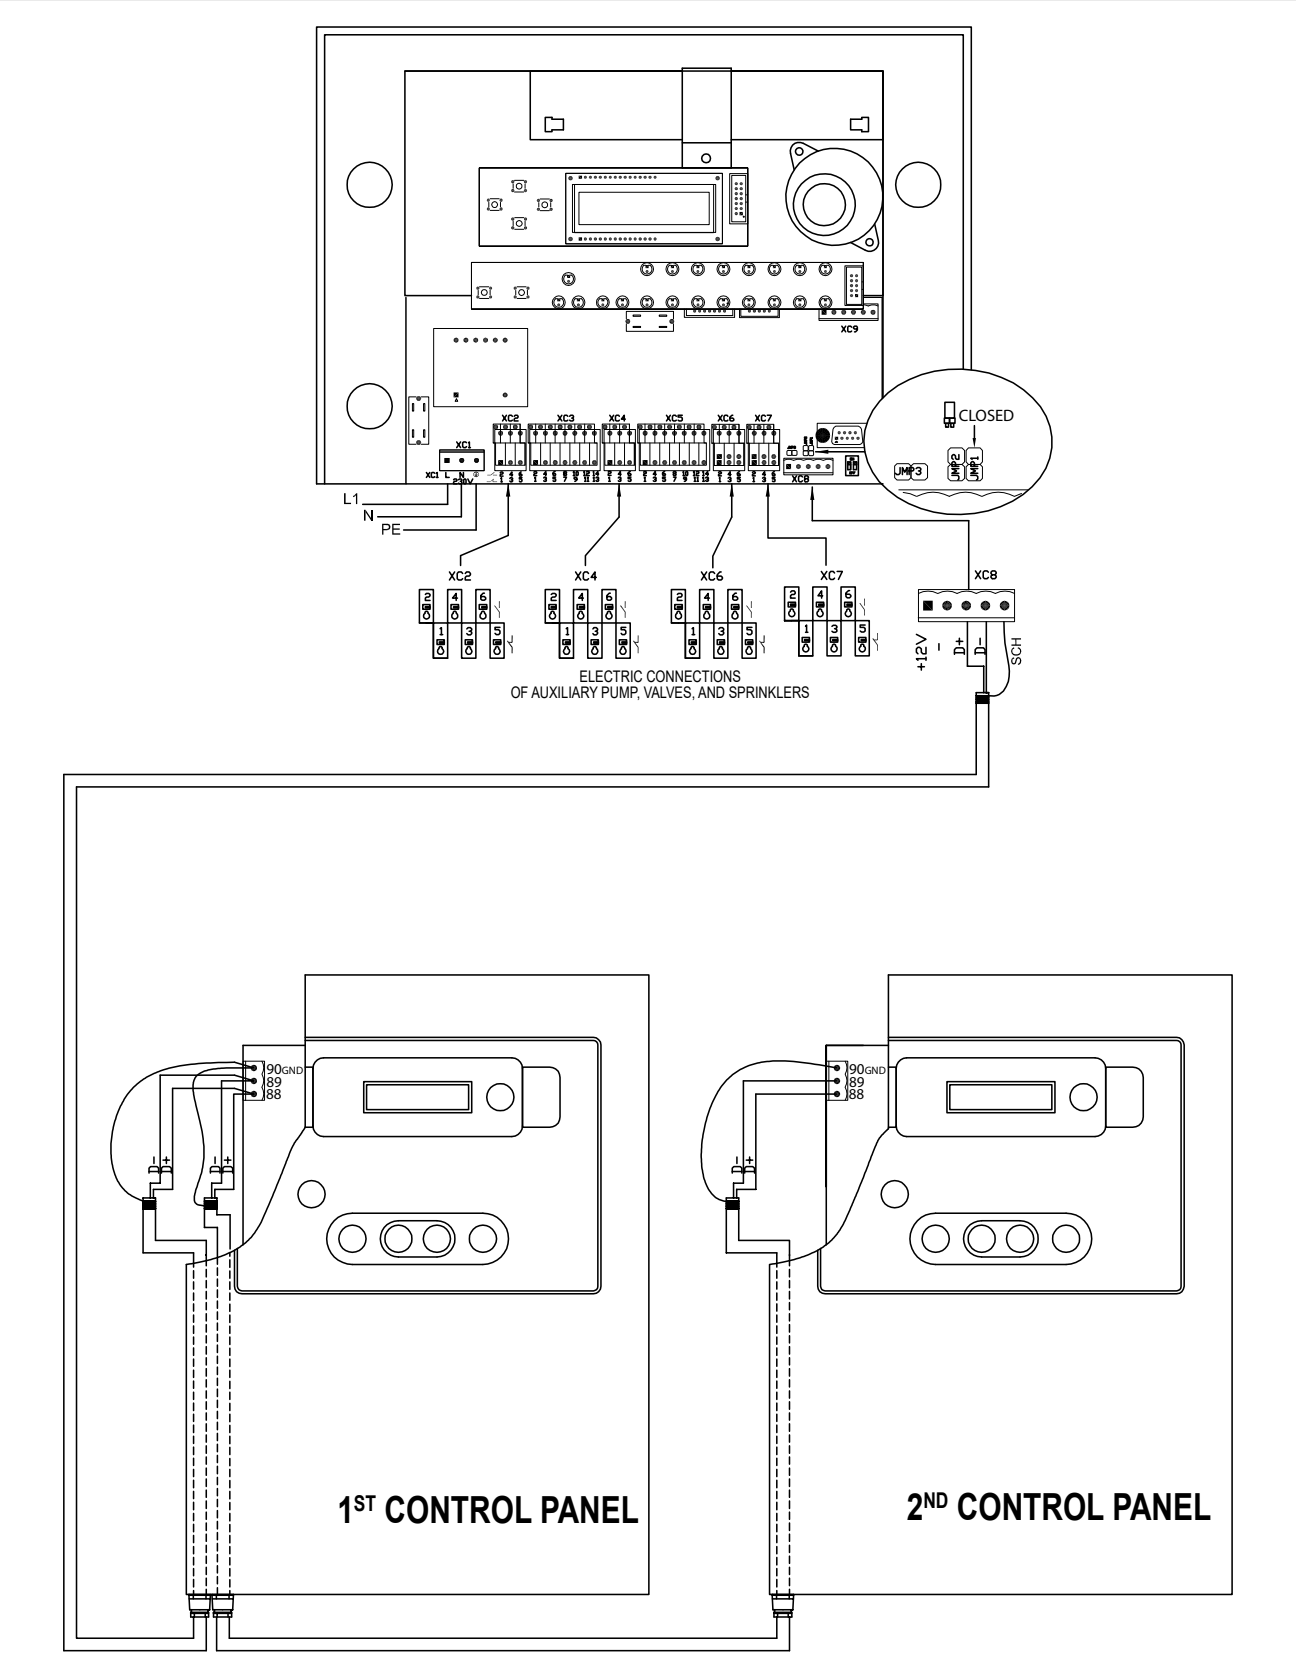

1 KDN COMPACT

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH STANDARDIZED CENTRIFUGAL PUMPS

DIAGRAM FOR CONTACT CONNECTION OF THE CSR-1 TO THE ELECTRIC AND DIESEL PUMP CONTROL PANELS

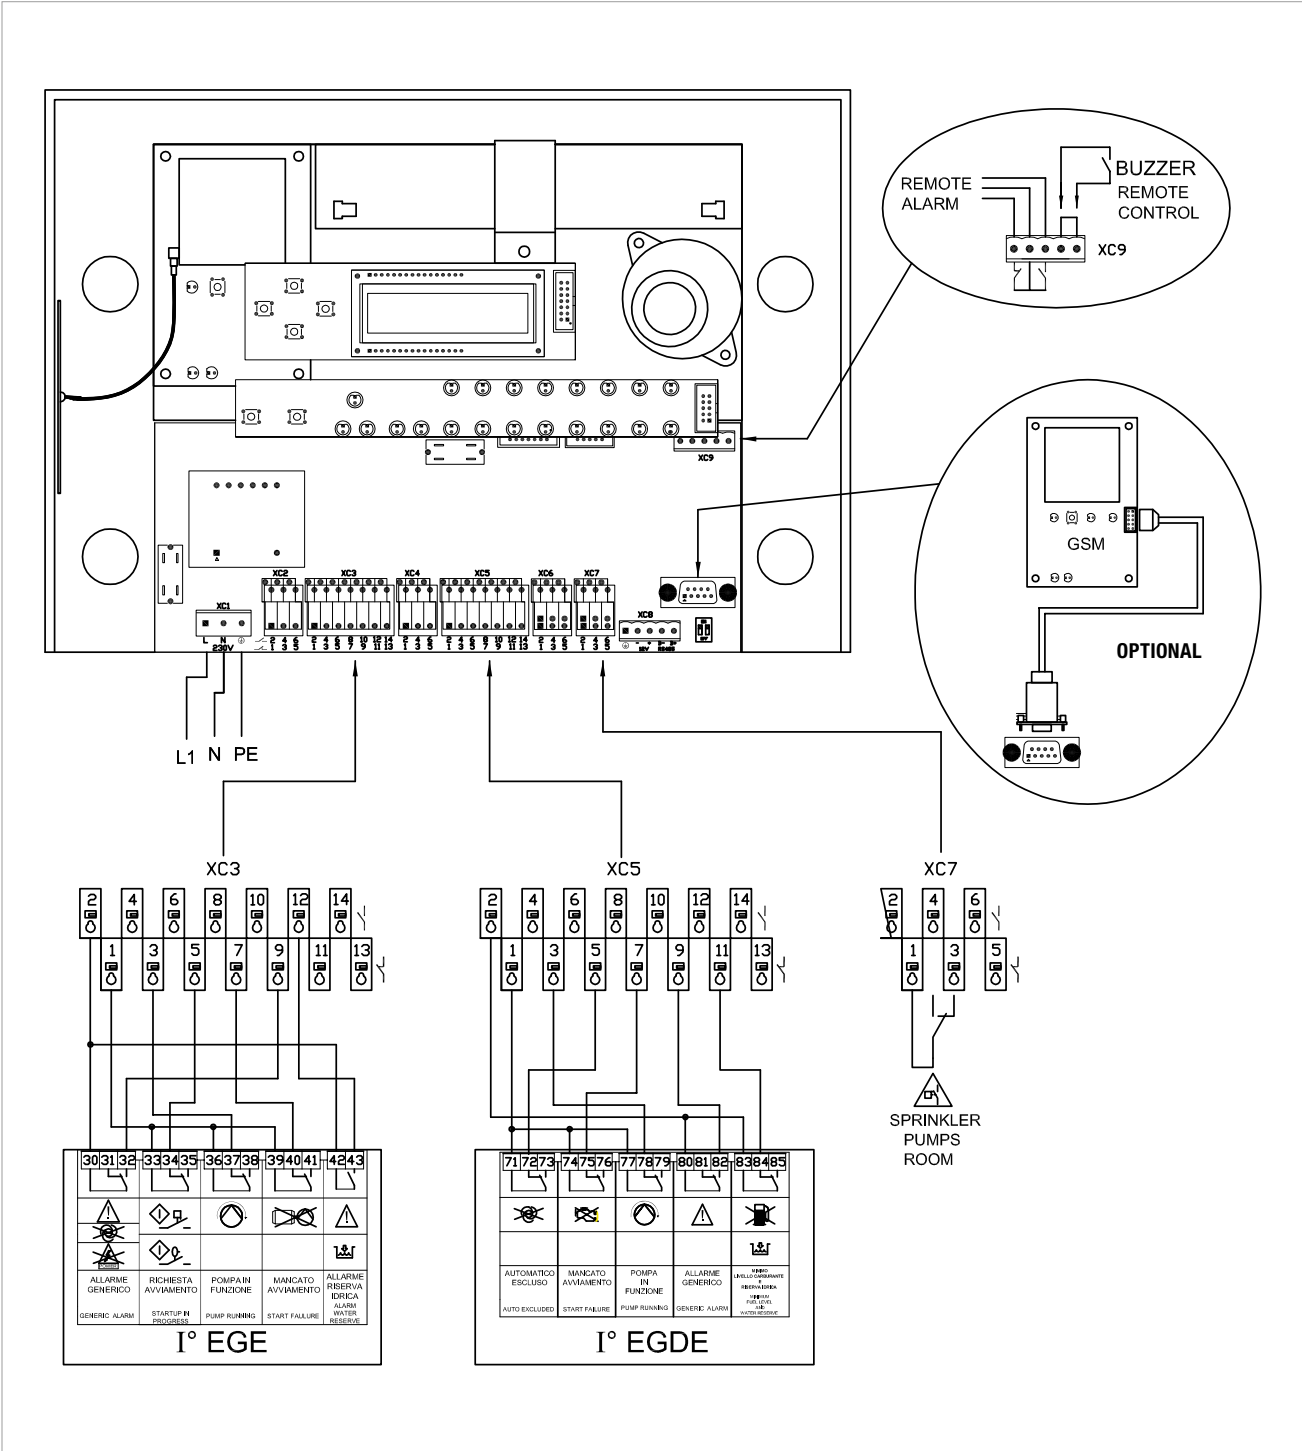


1 KDN COMPACT

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH STANDARDIZED CENTRIFUGAL PUMPS

PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

GRAPHIC SELECTION TABLE

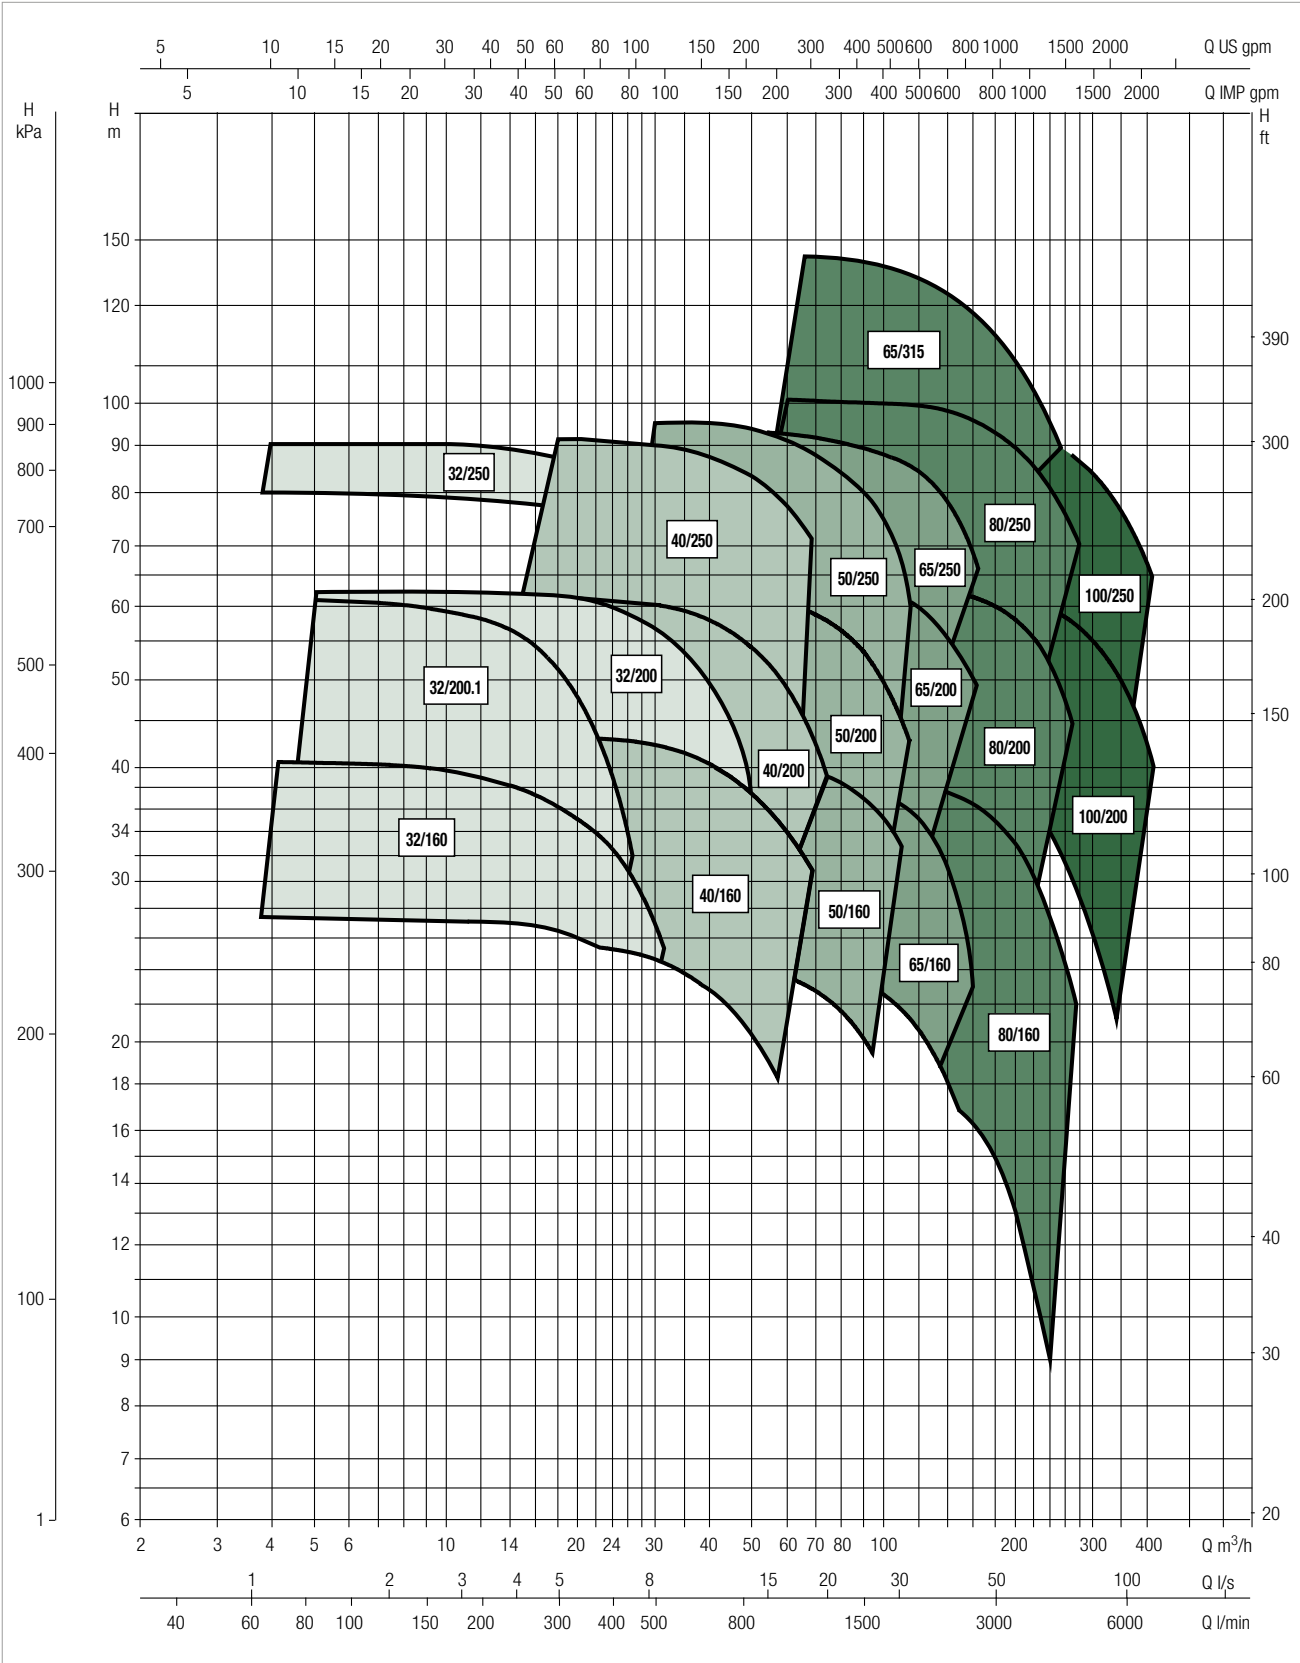


For higher performances contact our sales team



DAB PUMPS reserves the right to make modifications without notice.

1 KDN 32-160.1/161-169-177 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0°C to +70°C - Maximum ambient temperature: from +4°C to +40°C

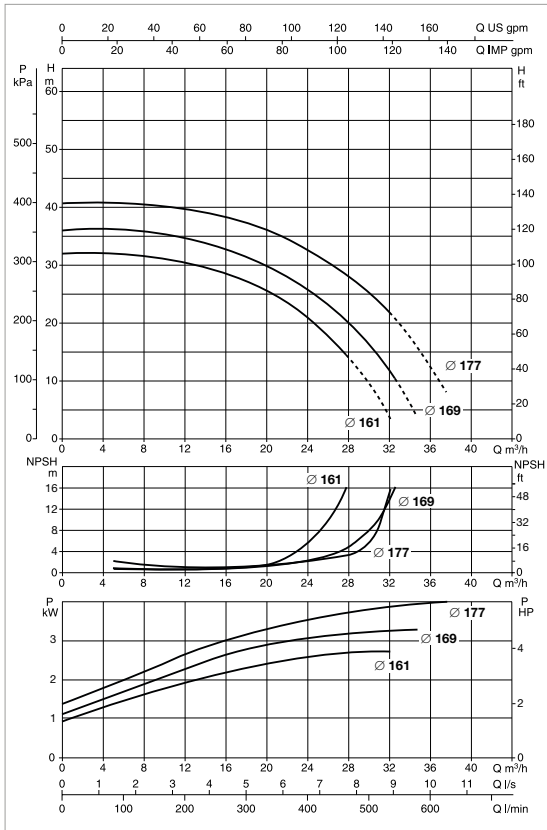

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1KDN 32-160.1/161 3	3x400 V ~	JET 251 T	3	1,85	5,9	KDN32 EN 12845
1KDN 32-160.1/169 4	3x400 V ~	JET 251 T	4	1,85	8,1	KDN 32 EN 12845
1KDN 32-160.1/177 5,5	3x400 V ~	JET 251 T	5,5	1,85	10,4	KDN 32 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1KDN 32-160.1/161 MD	3x230 / 400 V ~	JET 251 T	7,1	1,85	KDN32 EN 12845	0,22 m²
1KDN 32-160.1/169 MD	3x230 / 400 V ~	JET 251 T	7,1	1,85	KDN32 EN 12845	0,22 m²
1KDN 32-160.1/177 MD	3x230 / 400 V ~	JET 251 T	7,1	1,85	KDN32 EN 12845	0,22 m²

* Jockey pump on request.


** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE

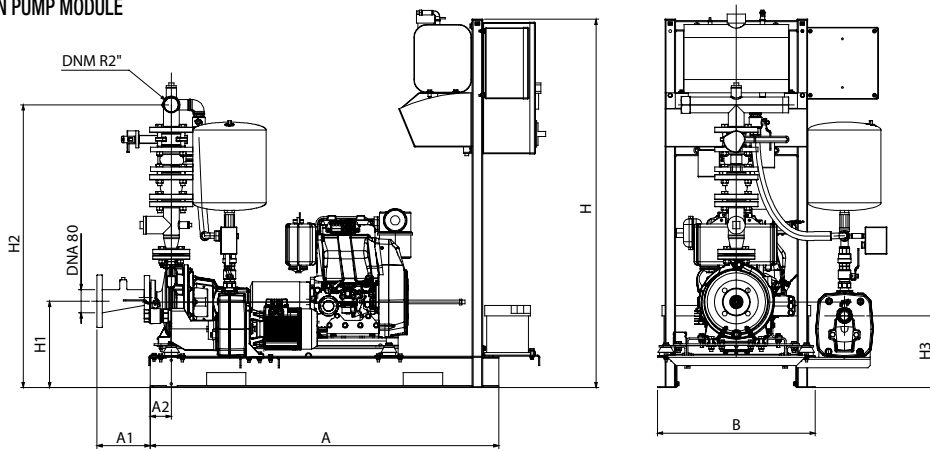


ELECTRIC PUMP MODULE

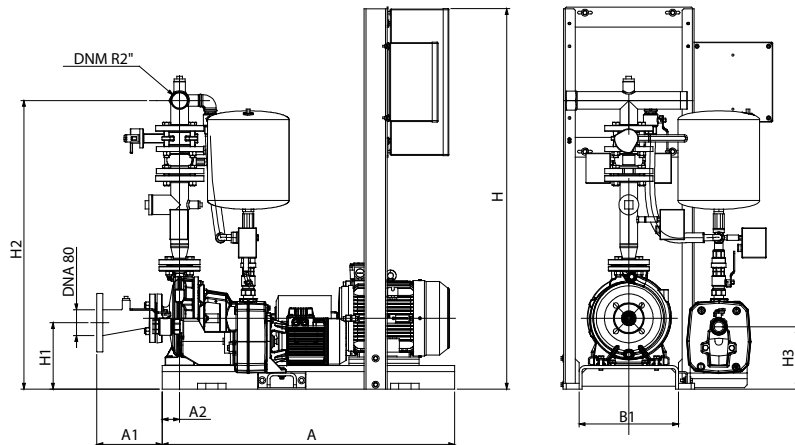


1 KDN 32-160.1/161-169-177 - UNI EN 12845 FIRE FIGHTING PUMPS SETS


2 ELECTRIC PUMP MODULES

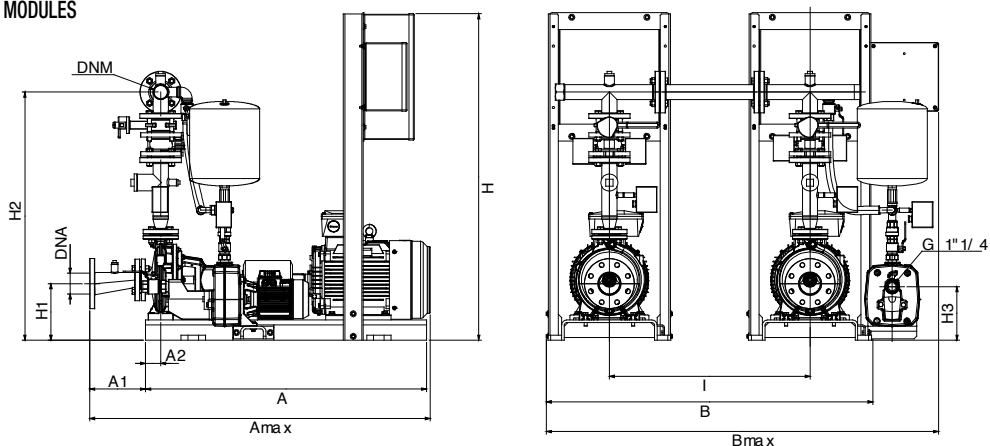

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP MODULE

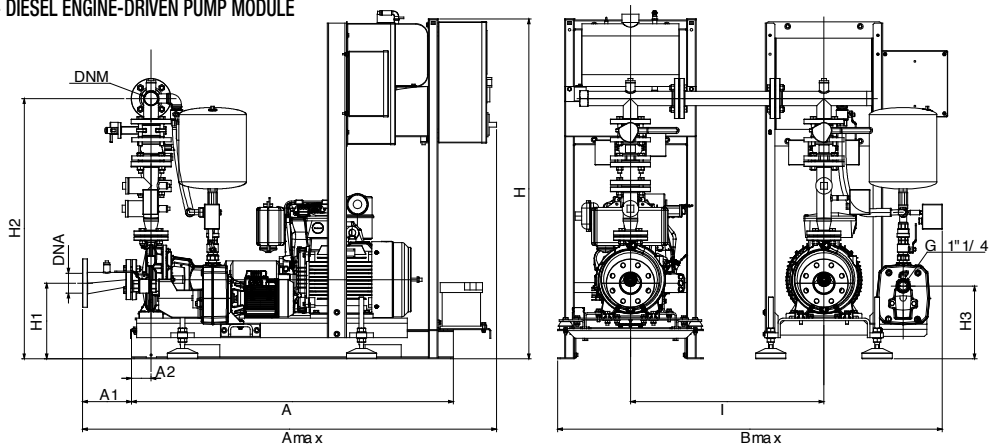


2 DIESEL ENGINE-DRIVEN PUMP MODULES

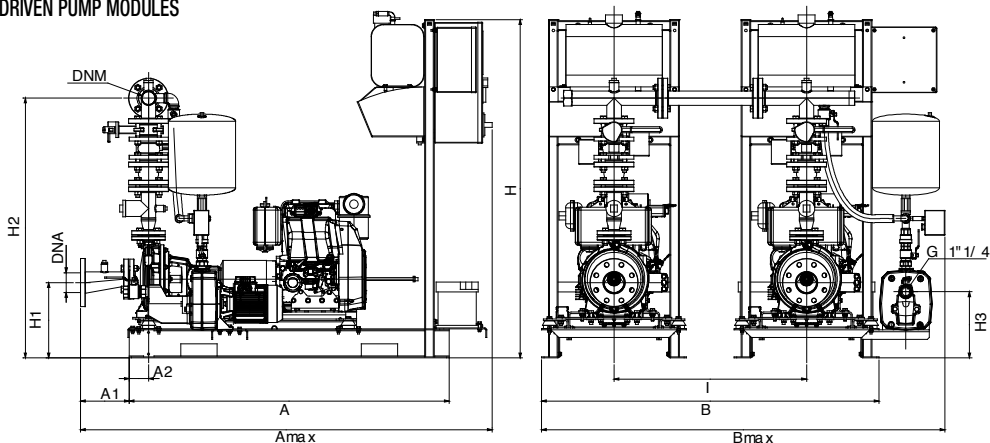

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump Kg	WEIGHT with jockey pump Kg
1 KDN 32-160.1/161-169-177 - DIESEL ENGINE DRIVEN PUMP MODULE	1330	203	81	1711	602	-	876	1505	876	1131	274	-	-	-	DN 80	2"	344	384
1 KDN 32-160.1/161-169-177 - ELECTRIC PUMP MODULE	1000	223	60	1223	462	340	723	1400	197	1037	213	-	-	-	DN 80	2"	276	316
1 KDN 32-160.1/161-169-177 - 2 ELECTRIC PUMP MODULES	1000	223	60	1223	1324	-	1585	1400	197	1037	213	-	-	800	DN 80	2"	552	592
1 KDN 32-160.1/161-169-177 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1330	203	81	1711	1604	-	1878	1505	277	1131	274	-	-	800	DN 80	2"	620	660
1 KDN 32-160.1/161-169-177 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1330	203	81	1711	1604	-	1878	1505	277	1131	274	-	-	800	DN 80	2"	688	728

1 KDN 32-160/177 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0°C to +70°C - Maximum ambient temperature: from +4°C to +40°C

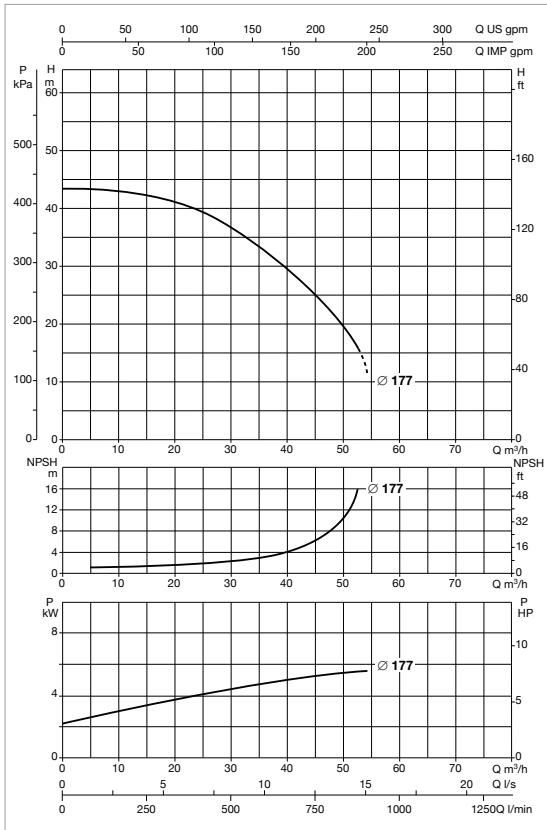

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 32-160/177 5,5	3 x 400 V ~	JET 251 T	5,5	1,85	10,4	KDN 32 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 32-160/177 MD	3 x 230 / 400 V ~	JET 251 T	7,1	1,85	KDN 32 EN 12845	0,22 m²

* Jockey pump on request.


** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE

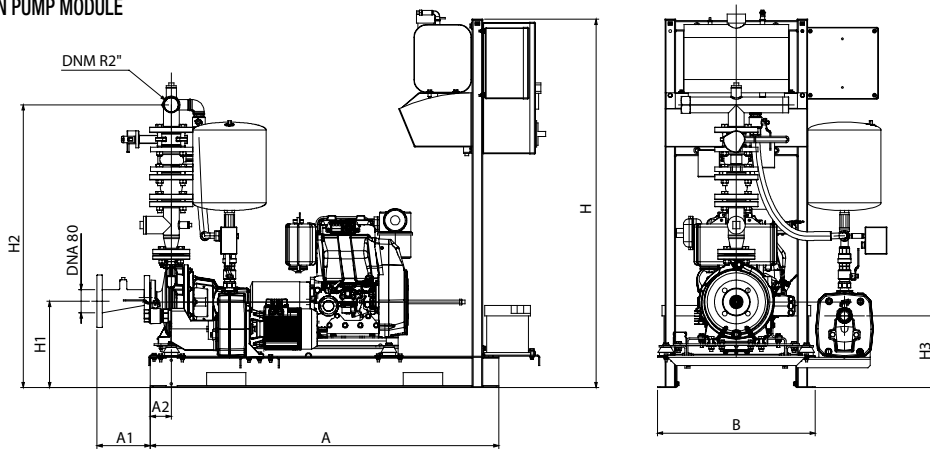


ELECTRIC PUMP MODULE

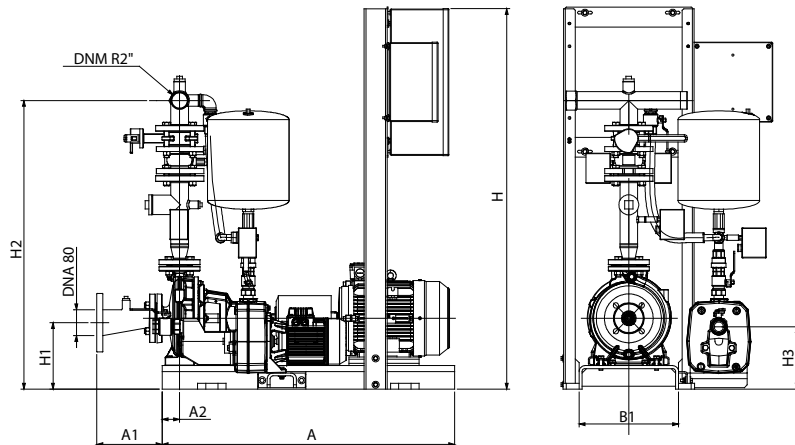


1 KDN 32-160/177 - UNI EN 12845 FIRE FIGHTING PUMPS SETS


2 ELECTRIC PUMP MODULES

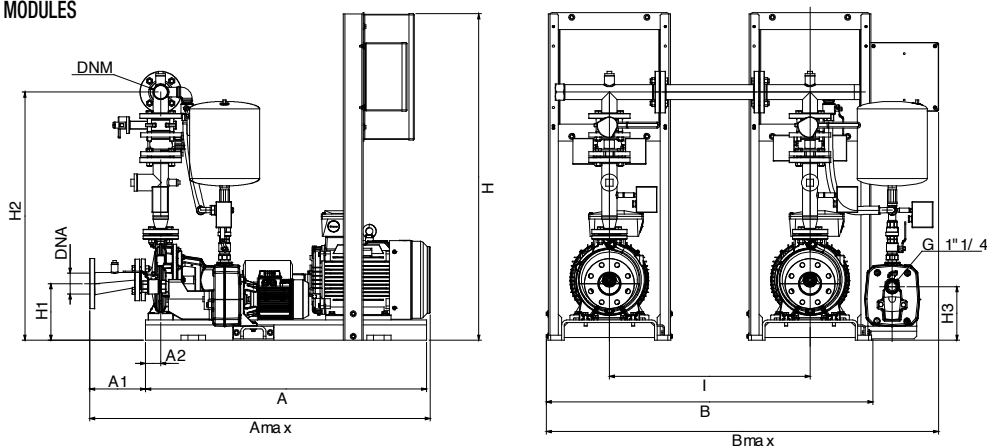

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP MODULE

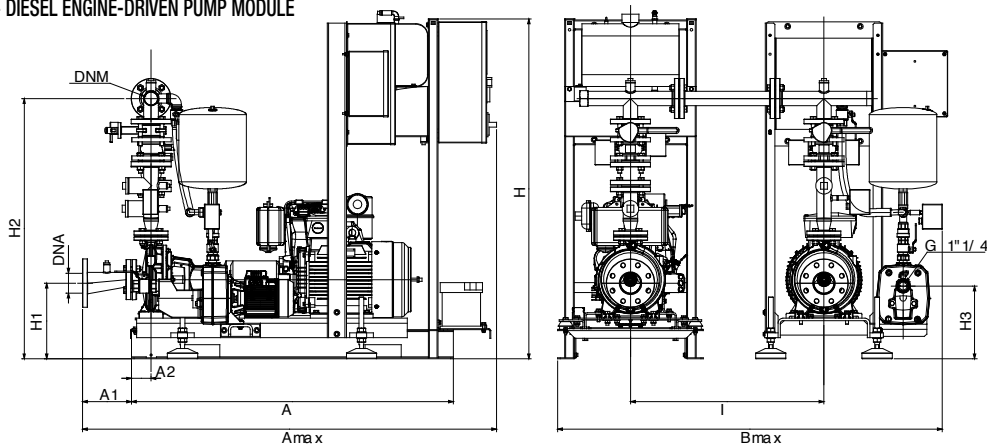


2 DIESEL ENGINE-DRIVEN PUMP MODULES

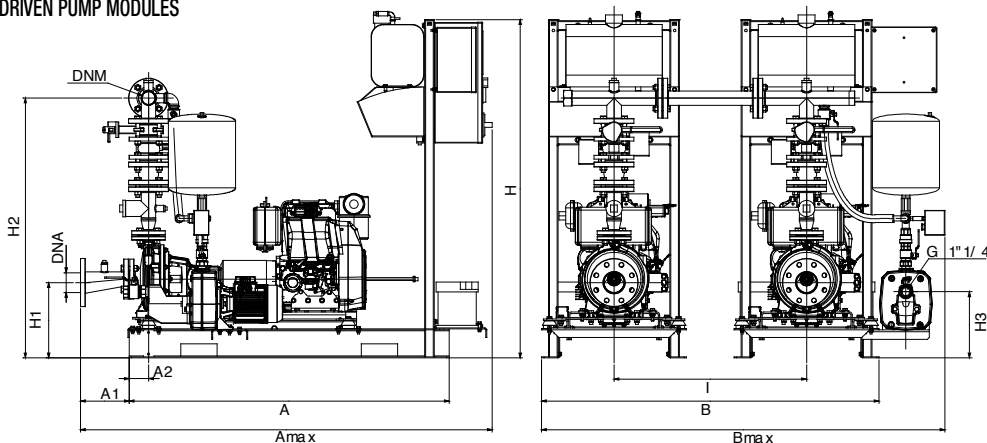

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump Kg	WEIGHT with jockey pump Kg
1 KDN 32-160/177 - DIESEL ENGINE DRIVEN PUMP MODULE	1000	223	60	1223	462	340	723	1401	197	1037	213	-	-	-	DN 80	2"	286	326
1 KDN 32-160/177 - ELECTRIC PUMP MODULE	1000	223	60	1223	1324	-	1585	1401	197	1037	213	-	-	800	DN 80	2"	572	612
1 KDN 32-160/177 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1330	203	81	1711	1318	-	1878	1505	284	1131	274	-	-	800	DN 80	2"	630	670
1 KDN 32-160/177 - 2 ELECTRIC PUMP MODULES	1330	203	81	1711	1604	-	1878	1505	284	1131	274	-	-	800	DN 80	2"	688	728

1 KDN 32-200.1/190-200 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0°C to +70°C - Maximum ambient temperature: from +4°C to +40°C

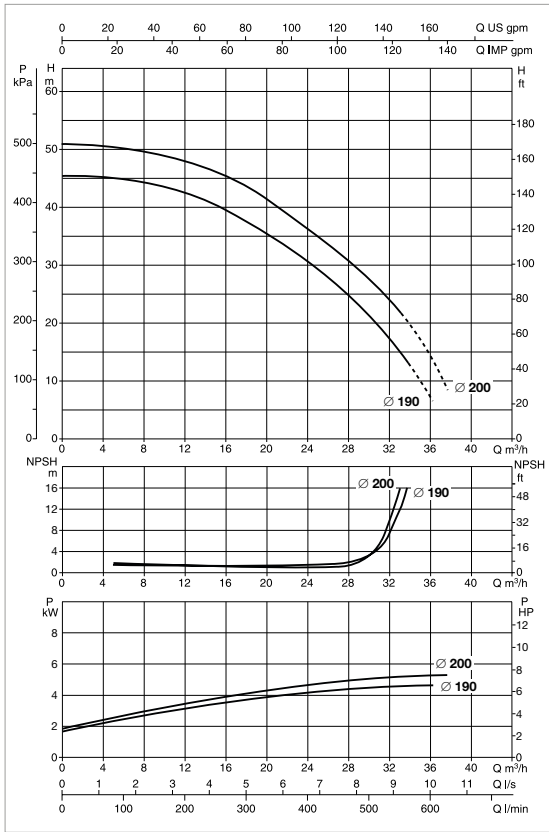

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 32-200.1/190 5,5	3 x 400 V ~	JET 251 T	5,5	1,85	10,4	KDN 32 EN 12845
1 KDN 32-200.1/200 5,5	3 x 400 V ~	JET 251 T	5,5	1,85	10,4	KDN 32 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 32-200.1/190 MD	3 x 230 / 400 V ~	JET 251 T	7,1	1,85	KDN 32 EN 12845	0,22 m²
1 KDN 32-200.1/200 MD	3 x 230 / 400 V ~	JET 251 T	7,1	1,85	KDN 32 EN 12845	0,22 m²

* Jockey pump on request.


** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE

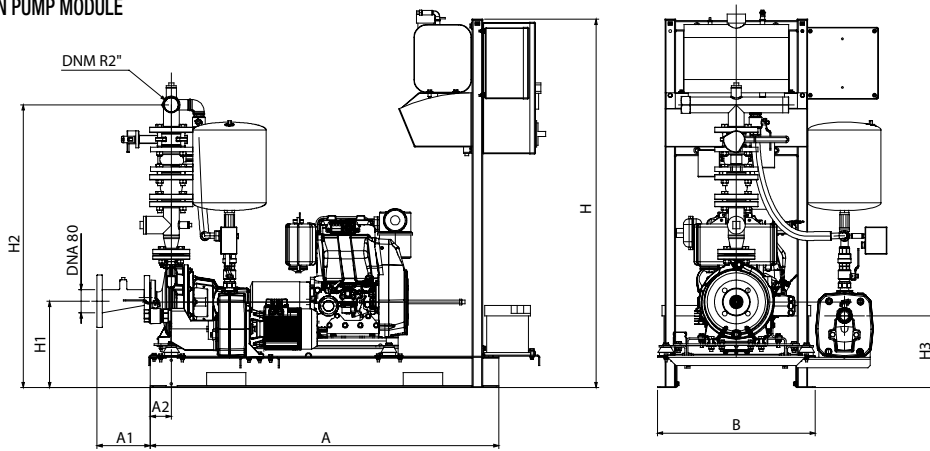


ELECTRIC PUMP MODULE

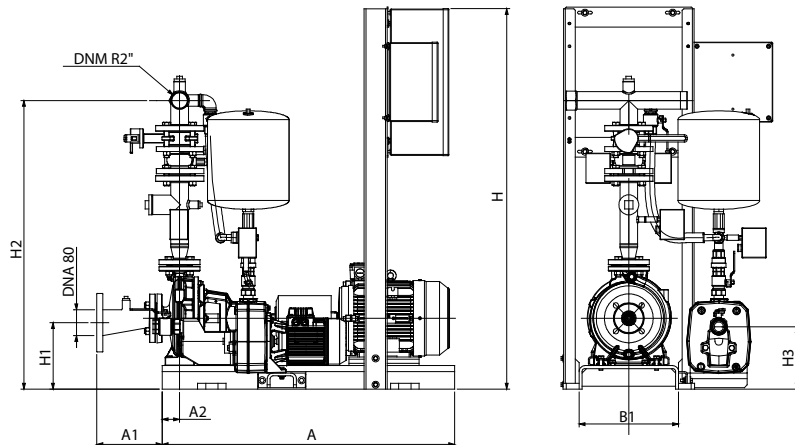


1 KDN 32-200.1/190-200 - UNI EN 12845 FIRE FIGHTING PUMPS SETS


2 ELECTRIC PUMP MODULES

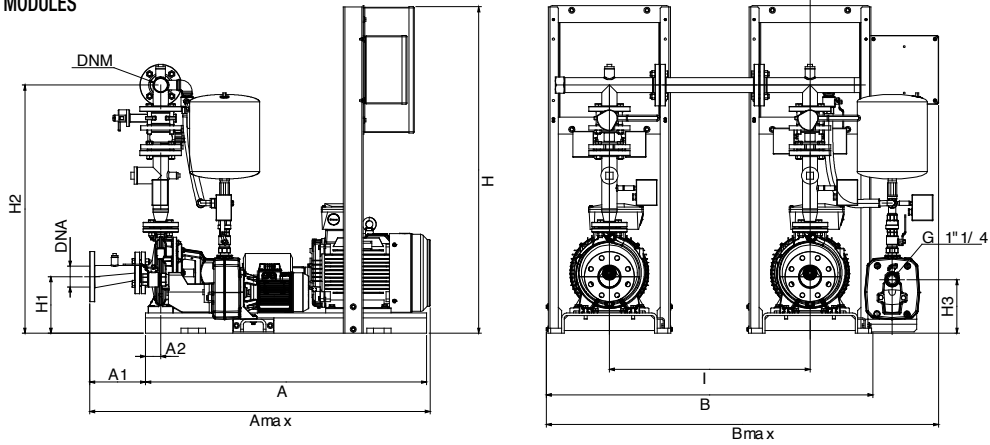

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP MODULE

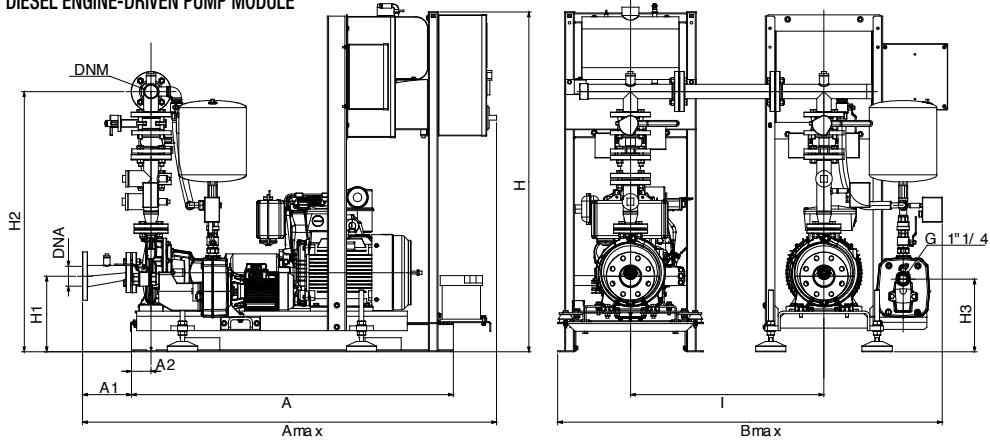


2 DIESEL ENGINE-DRIVEN PUMP MODULES

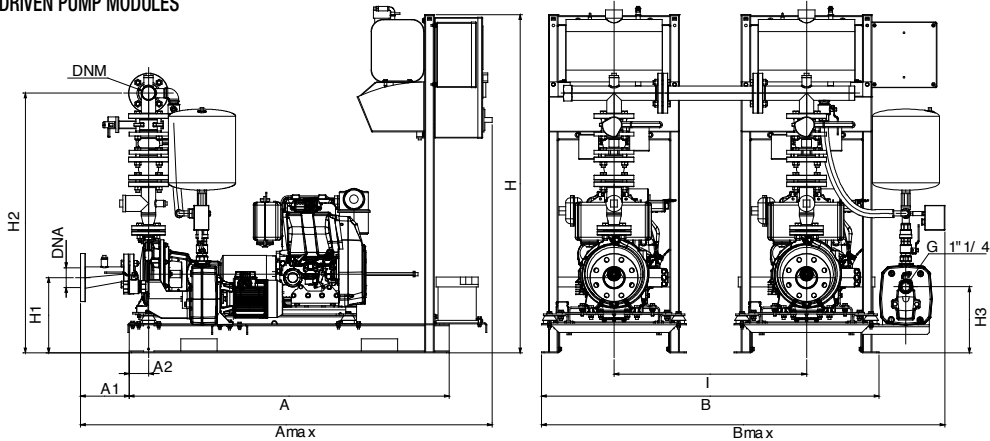

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump Kg	WEIGHT with jockey pump Kg
1 KDN 32-200.1/190-200 - DIESEL ENGINE DRIVEN PUMP MODULE	1330	202	81	1711	602	-	876	1505	330	1179	274	-	-	-	DN 80	2"	371	411
1 KDN 32-200.1/190-200 - ELECTRIC PUMP MODULE	1000	223	60	1223	462	340	723	1401	227	1089	213	-	-	-	DN 80	2"	312	352
1 KDN 32-200.1/190-200 - 2 ELECTRIC PUMP MODULES	1000	223	60	1223	1324	-	1585	1401	227	1089	213	-	-	800	DN 80	2"	624	664
1 KDN 32-200.1/190-200 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1330	202	81	1711	1604	-	1878	1505	330	1179	274	-	-	800	DN 80	2"	683	723
1 KDN 32-200.1/190-200 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1330	202	81	1711	1604	-	1878	1505	330	1179	274	-	-	800	DN 80	2"	742	782

1 KDN 32-200.1/207- UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

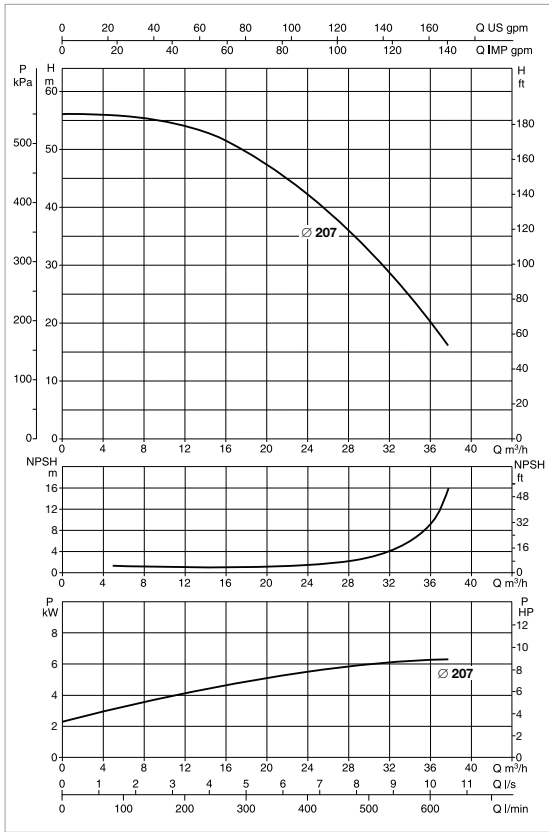

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 32-200.1/207 7,5	3 x 400 V ~	JET 251 T	7,5	1,85	13,4	KDN 32 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 32-200.1/207 MD	3 x 230 / 400 V ~	JET 251 T	7,1	1,85	KDN 32 EN 12845	0,22 m²

* Jockey pump on request.


** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE

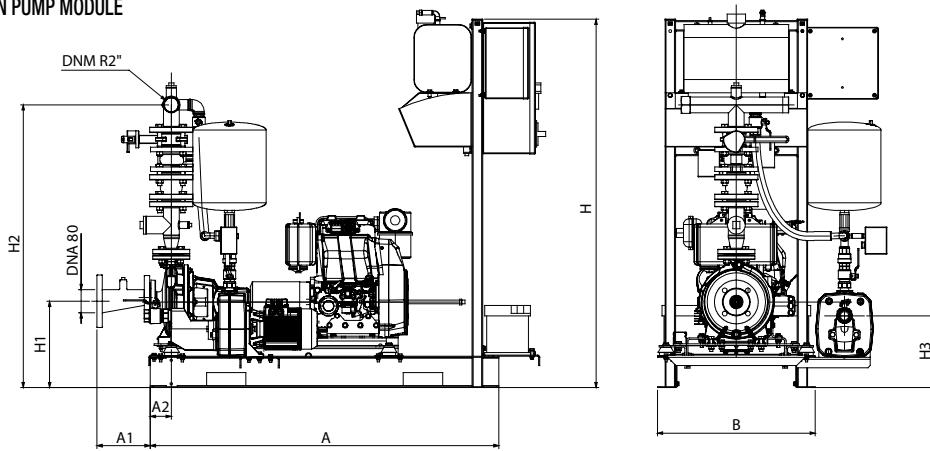


ELECTRIC PUMP MODULE

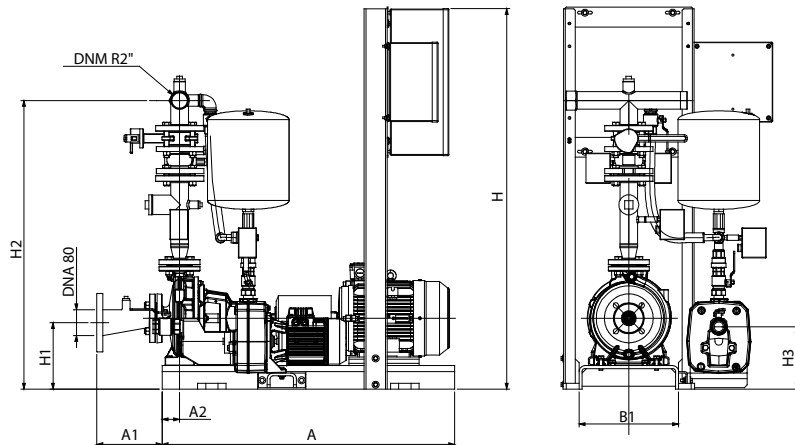


1 KDN 32-200.1/207 - UNI EN 12845 FIRE FIGHTING PUMPS SETS


2 ELECTRIC PUMP MODULES

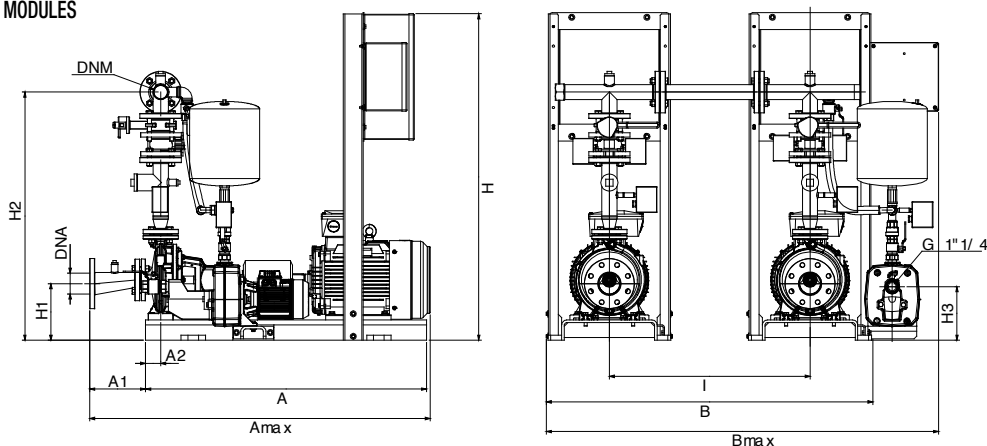

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP MODULE

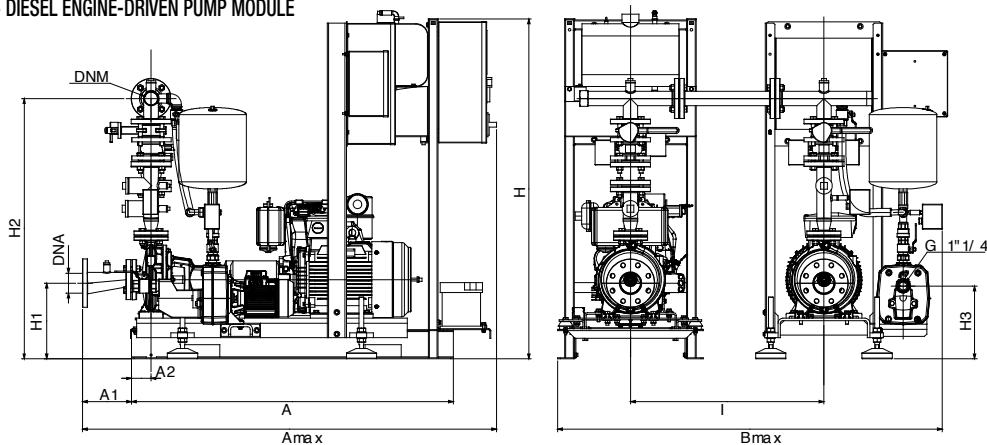


2 DIESEL ENGINE-DRIVEN PUMP MODULES

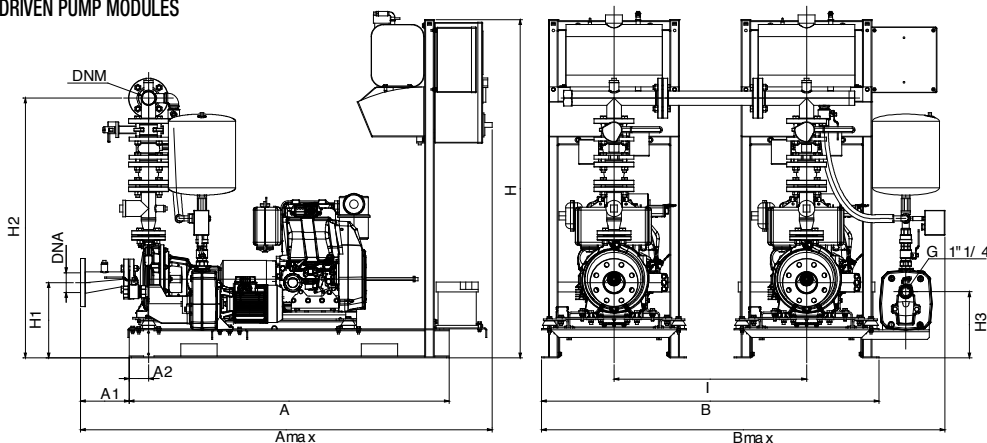

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump Kg	WEIGHT with jockey pump Kg
1 KDN 32-200.1/207 - DIESEL ENGINE DRIVEN PUMP MODULE	1330	202	81	1711	1604	-	1878	1505	330	1179	274	-	-	-	DN 80	2"	371	411
1 KDN 32-200.1/207 - ELECTRIC PUMP MODULE	1000	223	60	1223	462	340	723	1401	227	1089	213	-	-	-	DN 80	2"	317	357
1 KDN 32-200.1/207 - 2 ELECTRIC PUMP MODULES	1000	223	60	1223	1324	-	1585	1401	227	1089	213	-	-	800	DN 80	2"	634	674
1 KDN 32-200.1/207 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1330	202	81	1711	1604	-	1878	1505	330	1179	274	-	-	800	DN 80	2"	688	728
1 KDN 32-200.1/207 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1330	202	81	1711	1604	-	1878	1505	330	1179	274	-	-	800	DN 80	2"	742	782

1 KDN 32-200/180-190-200 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

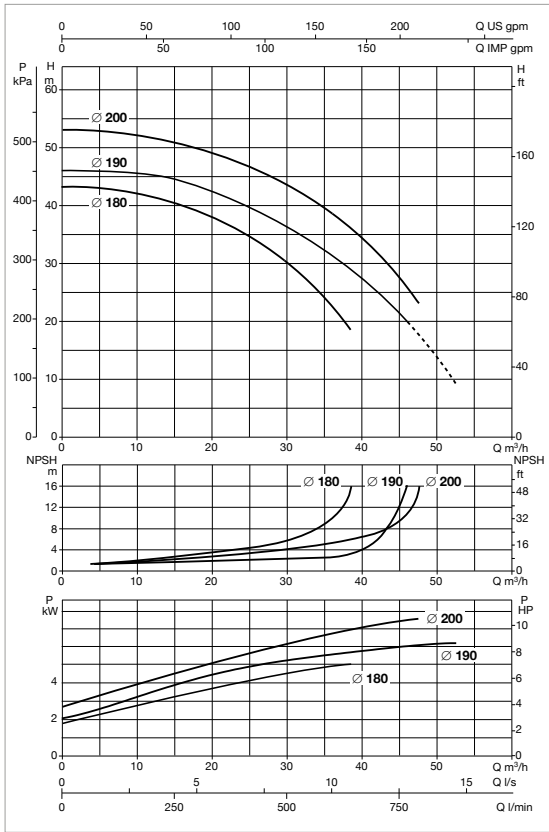

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 32-200/180 5,5	3 x 400 V ~	JET 251 T	5,5	1,85	10,4	KDN 32 EN 12845
1 KDN 32-200/190 7,5	3 x 400 V ~	JET 251 T	7,5	1,85	13,4	KDN 32 EN 12845
1 KDN 32-200/200 7,5	3 x 400 V ~	JET 251 T	7,5	1,85	13,4	KDN 32 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	METER KIT	FAN SURFACE
			kW	kW		
1 KDN 32-200/180 MD	3 x 230 / 400 V ~	JET 251 T	7,1	1,85	KDN 32 EN 12845	0,22 m²
1 KDN 32-200/190 MD	3 x 230 / 400 V ~	JET 251 T	7,1	1,85	KDN 32 EN 12845	0,22 m²
1 KDN 32-200/200 MD	3 x 230 / 400 V ~	JET 251 T	7,1	1,85	KDN 32 EN 12845	0,22 m²

* Jockey pump on request.


** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE

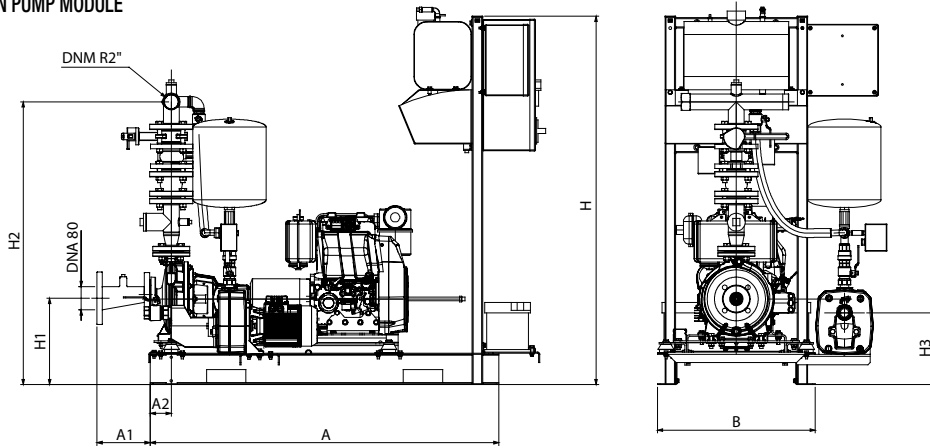


ELECTRIC PUMP MODULE

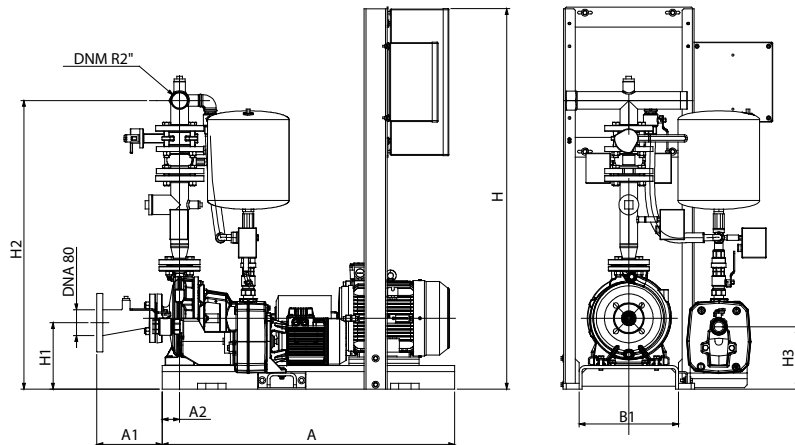


1 KDN 32-200/180-190-200 - UNI EN 12845 FIRE FIGHTING PUMPS SETS


2 ELECTRIC PUMP MODULES

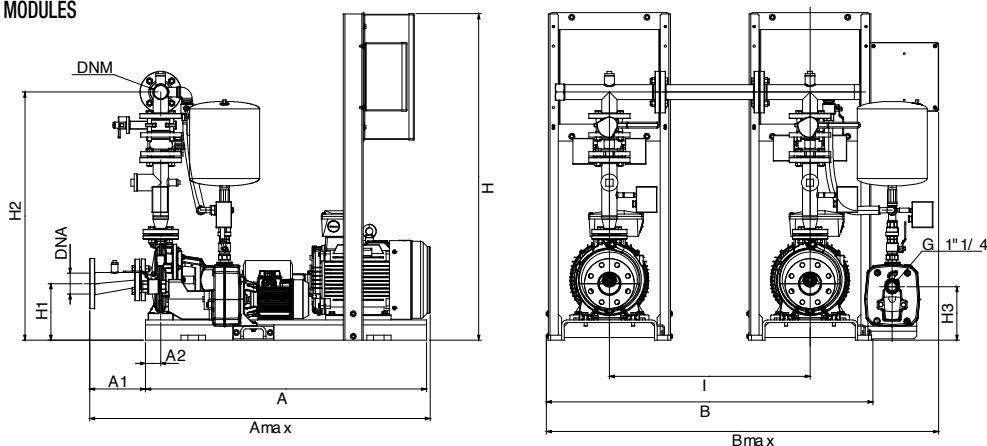

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP MODULE

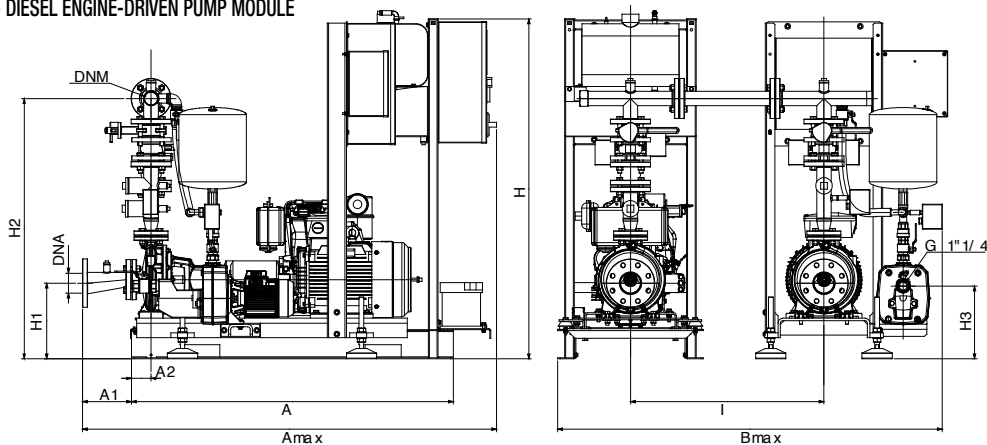


2 DIESEL ENGINE-DRIVEN PUMP MODULES

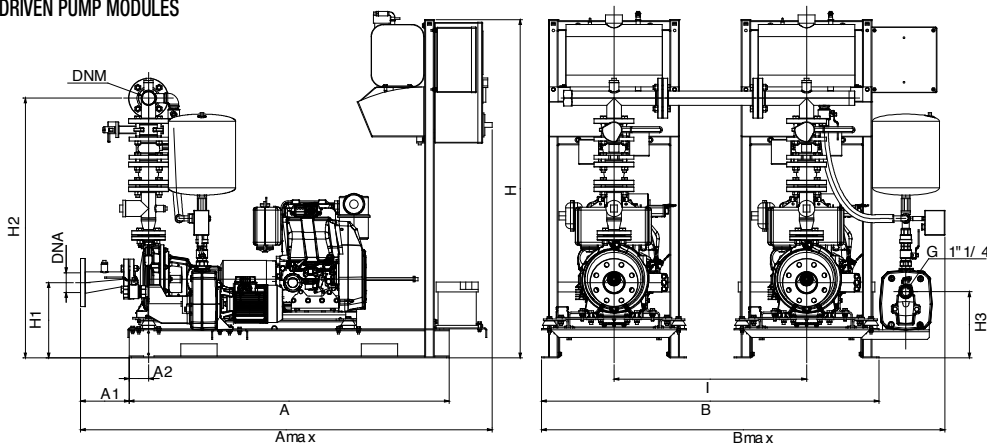

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 32-200/180-190-200 - DIESEL ENGINE DRIVEN PUMP MODULE	1330	202	81	1711	602	-	876	1505	330	1179	274	-	-	-	DN 80	2"	356	396
1 KDN 32-200/180-190-200 - ELECTRIC PUMP MODULE	1000	223	60	1223	462	340	723	1401	227	1087	213	-	-	-	DN 80	2"	351	397
1 KDN 32-200/180-190-200 - 2 ELECTRIC PUMP MODULES	1000	223	60	1223	1324	-	1585	1401	227	1087	213	-	-	800	DN 80	2"	702	748
1 KDN 32-200/180-190-200 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1330	202	81	1711	1604	-	1878	1505	330	1179	274	-	-	800	DN 80	2"	707	753
1 KDN 32-200/180-190-200 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1330	202	81	1711	1604	-	1878	1505	330	1179	274	-	-	800	DN 80	2"	712	752

1 KDN 32-200/210-219 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

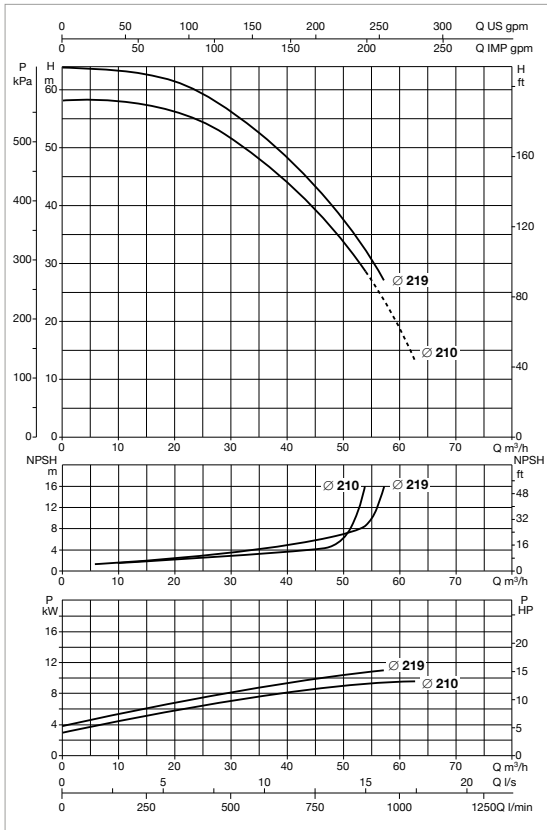

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 32-200/210 11	3 x 400 V ~	JET 251 T	11	1,85	19,4	KDN 32 EN 12845
1 KDN 32-200/219 11	3 x 400 V ~	JET 251 T	11	1,85	19,4	KDN 32 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 32-200/210 MD	3 x 230 / 400 V ~	JET 251 T	11	1,85	KDN 32 EN 12845	0,22 m²
1 KDN 32-200/219 MD	3 x 230 / 400 V ~	JET 251 T	11	1,85	KDN 32 EN 12845	0,22 m²

* Jockey pump on request.


** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.




DIESEL ENGINE-DRIVEN PUMP MODULE

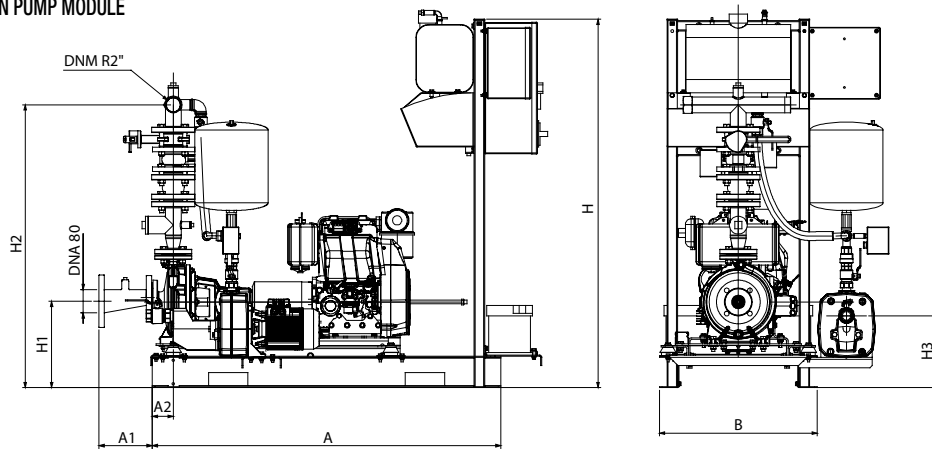

ELECTRIC PUMP MODULE

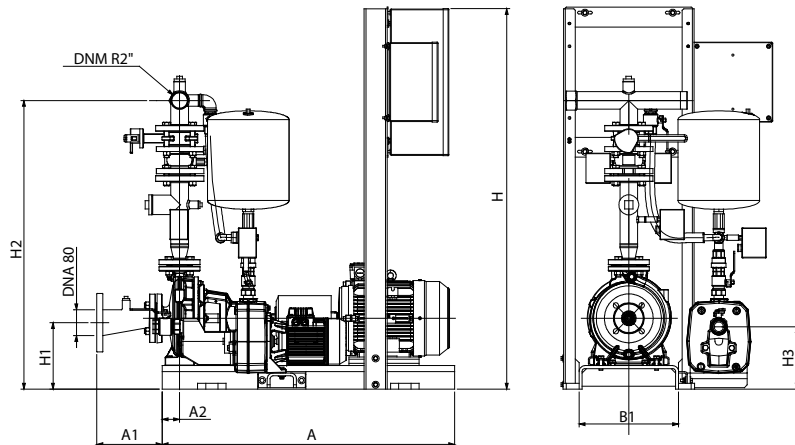


1 KDN 32-200/210-219 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

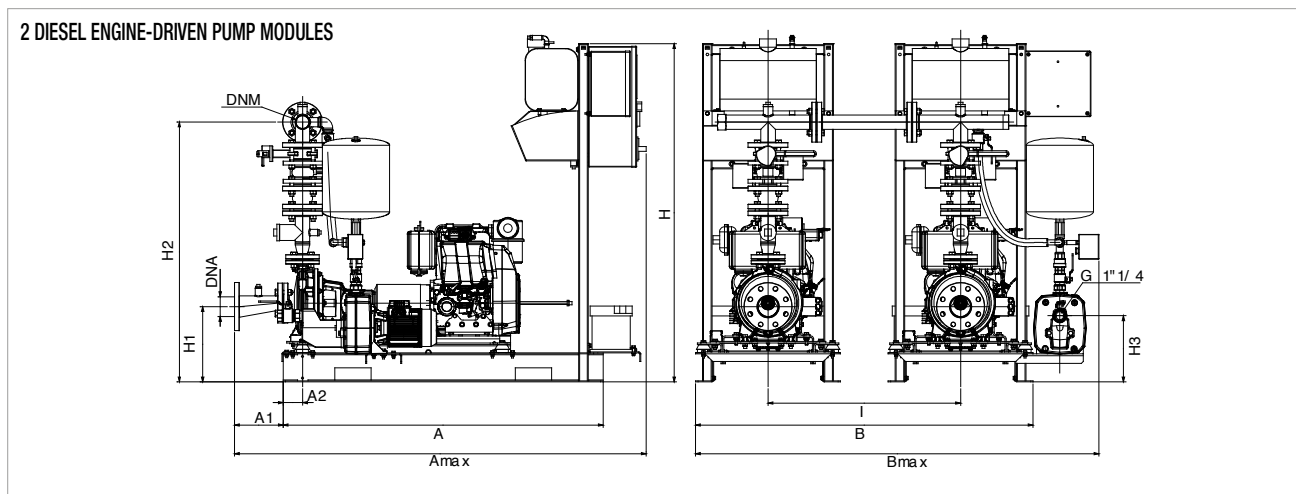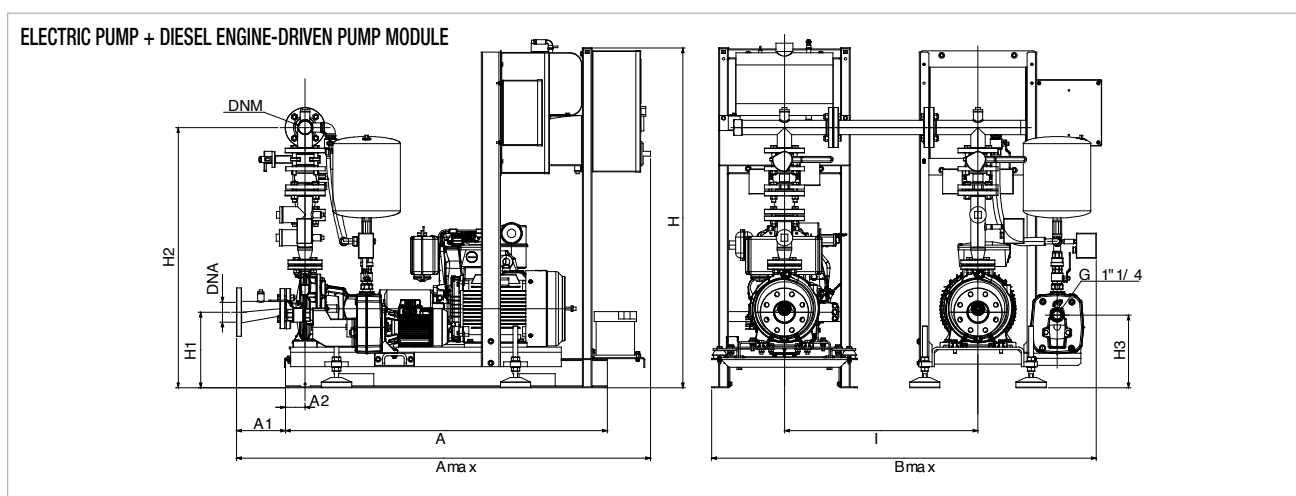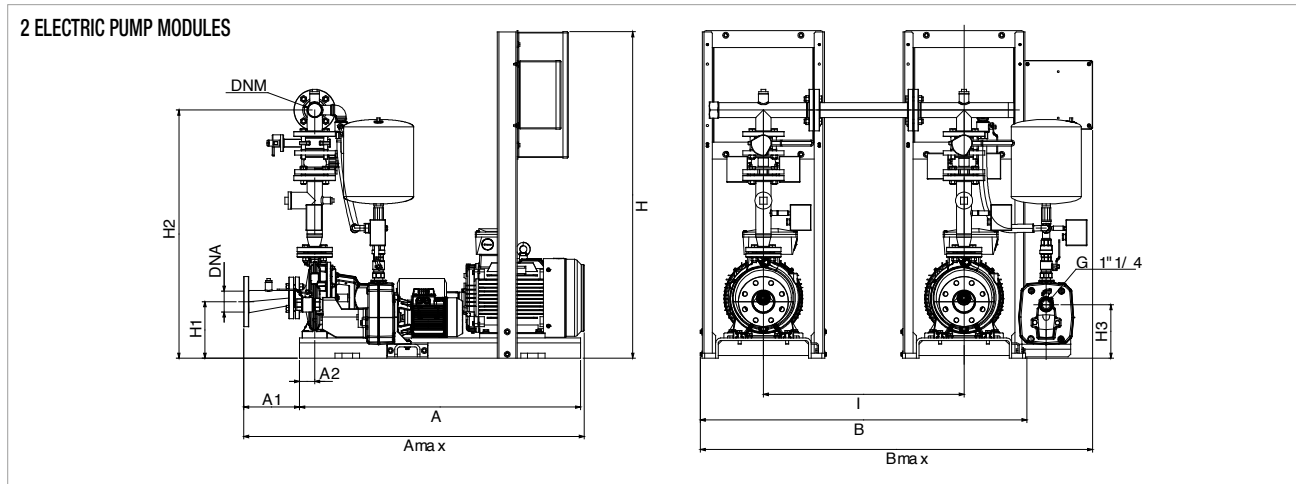

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 32-200/210-219 - DIESEL ENGINE DRIVEN PUMP MODULE	1330	203	81	1711	602	-	876	1505	330	1179	274	-	-	-	DN 80	2"	356	396
1 KDN 32-200/210-219 - ELECTRIC PUMP MODULE	1120	223	60	1358	502	380	763	1401	225	1087	213	-	-	-	DN 80	2"	361	400
1 KDN 32-200/210-219 - 2 ELECTRIC PUMP MODULES	1120	223	60	1358	1404	-	1665	1401	225	1087	213	-	-	800	DN 80	2"	722	761
1 KDN 32-200/210-219 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1330	203	81	1711	1604	-	1878	1505	330	1179	274	-	-	800	DN 80	2"	717	756
1 KDN 32-200/210-219 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1330	203	81	1711	1604	-	1878	1505	330	1179	274	-	-	800	DN 80	2"	712	752

1 KDN 32-250/257 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

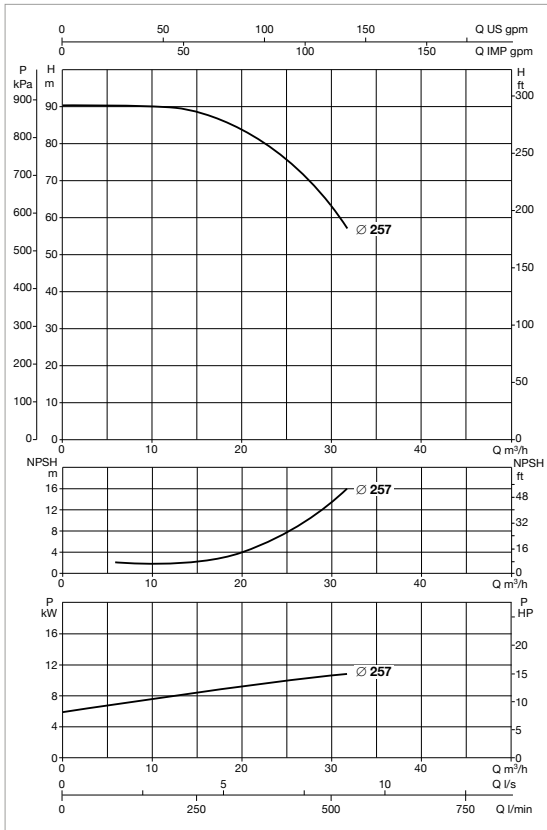

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 32-250/257 15	3 x 400 V ~	KVCX 65/80 T	15	2,2	26,5	KDN 32 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 32-250/257 MD	3 x 230 / 400 V ~	KVCX 65/80 T	15	2,2	KDN 32 EN 12845	0,22 m²

* Jockey pump on request.


** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE

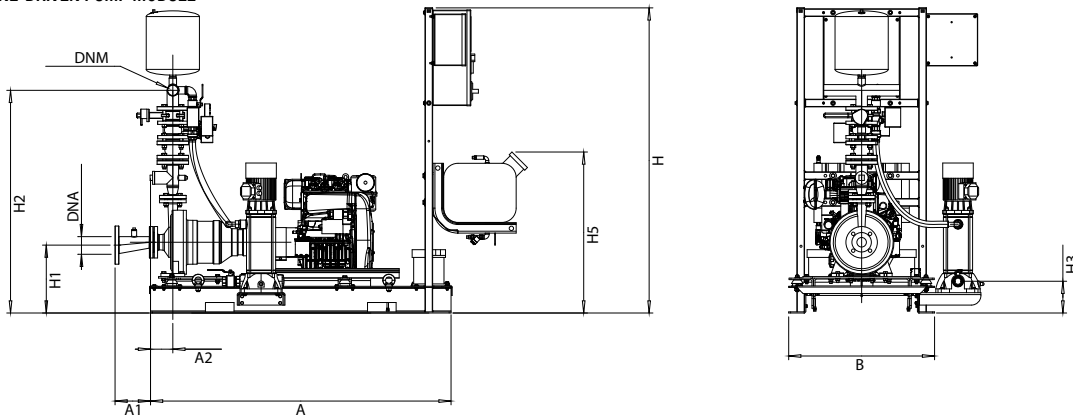


ELECTRIC PUMP MODULE

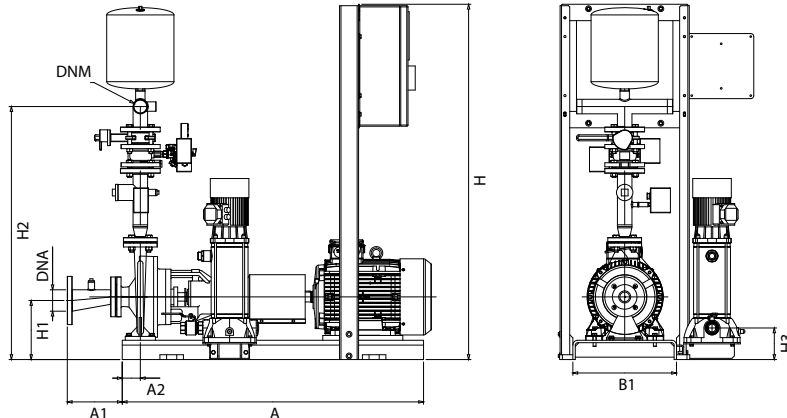


The dashed components are not included in the standard supply.

1 KDN 32-250/257 - UNI EN 12845 FIRE FIGHTING PUMPS SETS


2 ELECTRIC PUMP MODULES

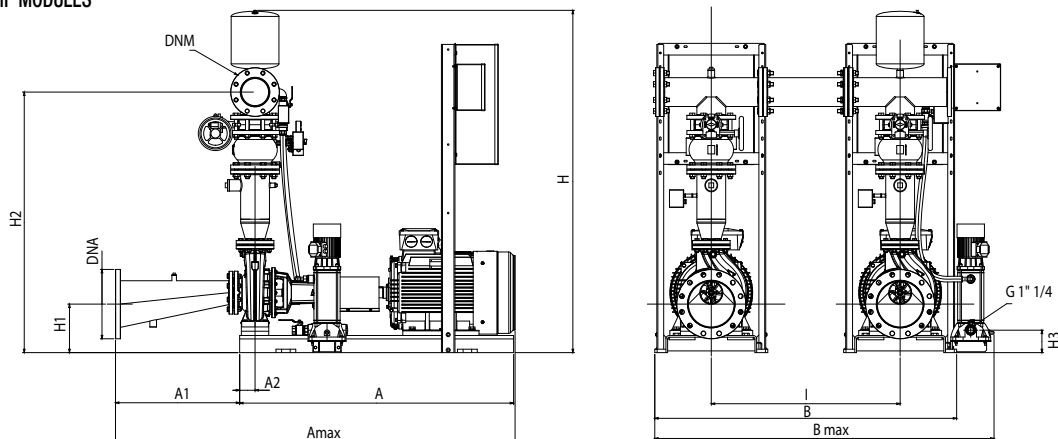

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP MODULE

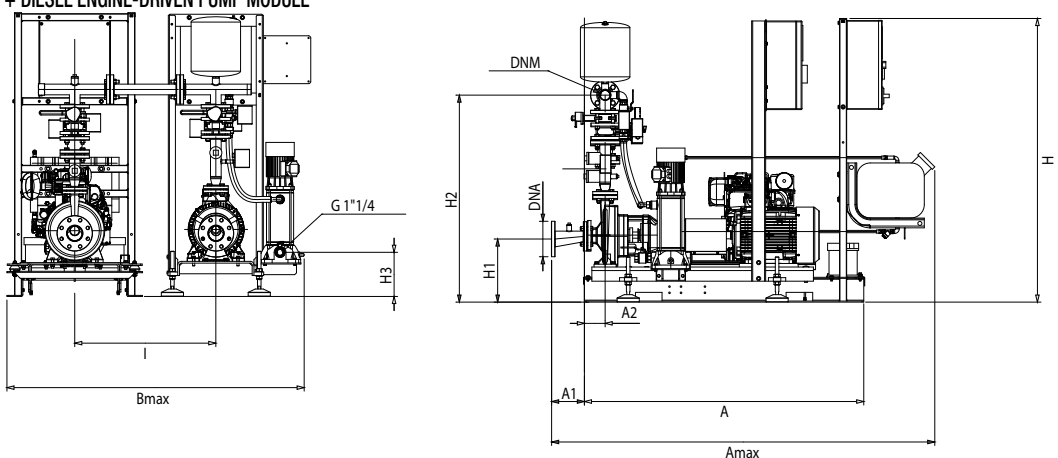

2 DIESEL ENGINE-DRIVEN PUMP MODULES

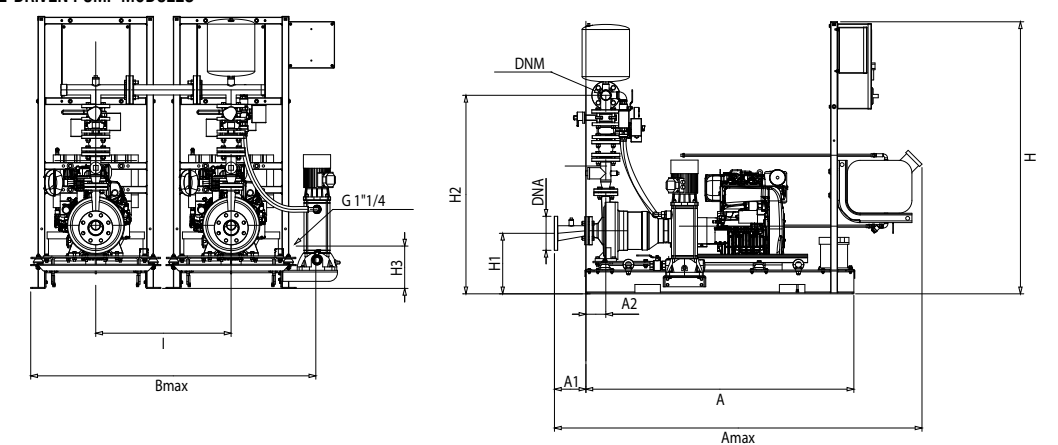


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DN	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 32-250/257 - DIESEL ENGINE DRIVEN PUMP MODULE	1576	186	117	2163	765	-	1024	1700	356	1268	167	-	844	-	DN 80	2"	367	400
1 KDN 32-250/257 - ELECTRIC PUMP MODULE	1250	228	75	1511	522	430	804	1574	245	1150	131	-	-	-	DN 80	2"	390	414
1 KDN 32-250/257 - 2 ELECTRIC PUMP MODULES	1250	228	75	1511	1504	-	1756	1574	245	1150	131	-	-	800	DN 80	2"	780	804
1 KDN 32-250/257 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1576	186	117	2163	-	-	2189	1700	356	1268	167	-	844	800	DN 80	2"	757	781
1 KDN 32-250/257 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1576	186	117	2163	-	-	2189	1700	356	1268	167	-	844	800	DN 80	2"	734	767

1 KDN 40-160/161 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

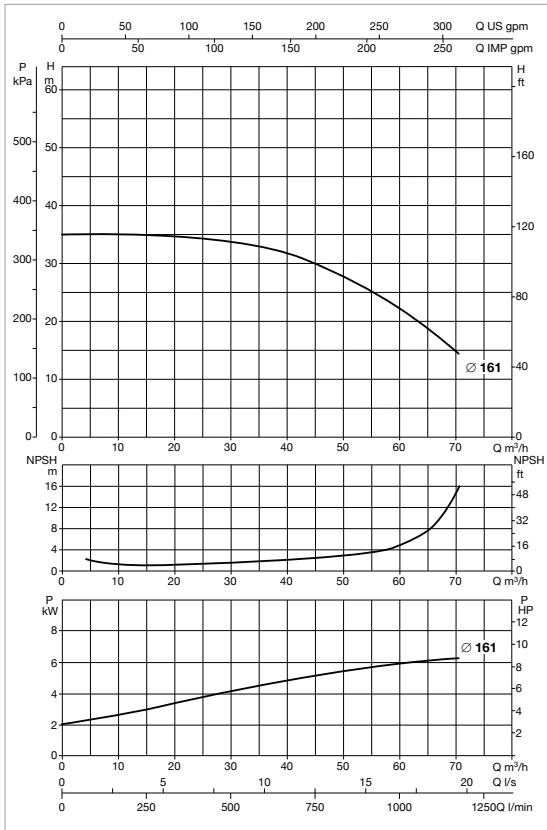

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 40-160/161 7,5	3 x 400 V ~	JET 251 T	7,5	1,85	13,4	KDN 40 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 40-160/161 MD	3 x 230 / 400 V ~	JET 251 T	7,1	1,85	KDN 40 EN 12845	0,22 m²

* Jockey pump on request.


** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE

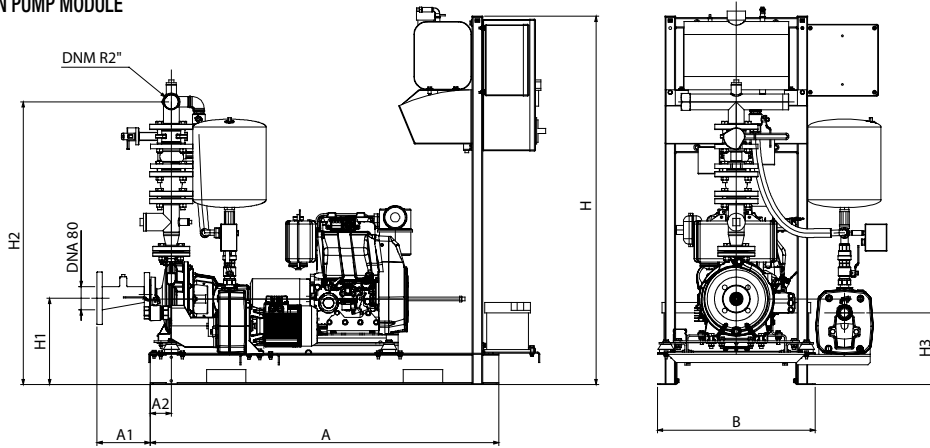


ELECTRIC PUMP MODULE

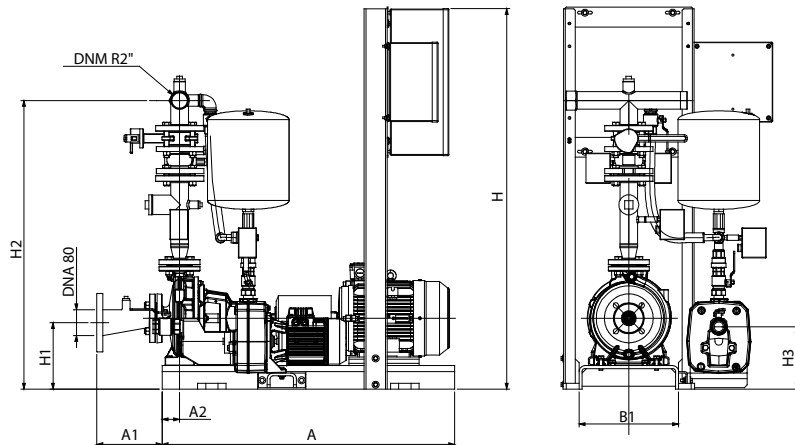


1 KDN 40-160/161 - UNI EN 12845 FIRE FIGHTING PUMPS SETS


2 ELECTRIC PUMP MODULES

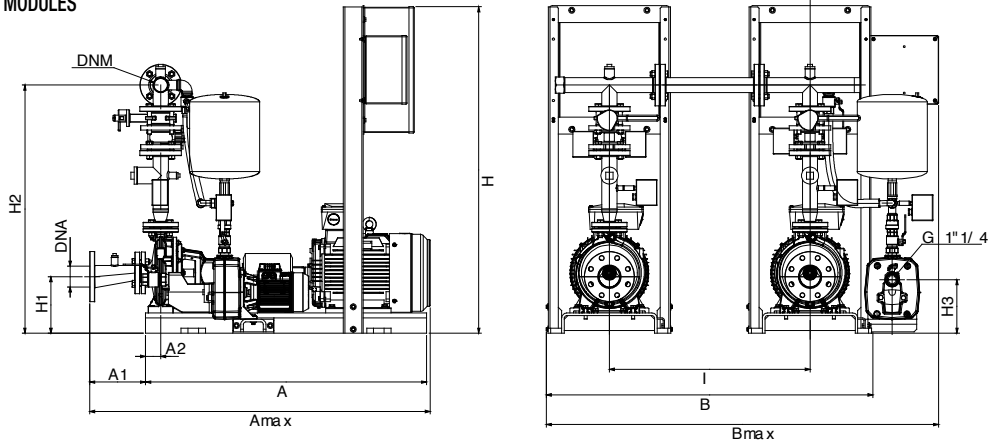

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP MODULE

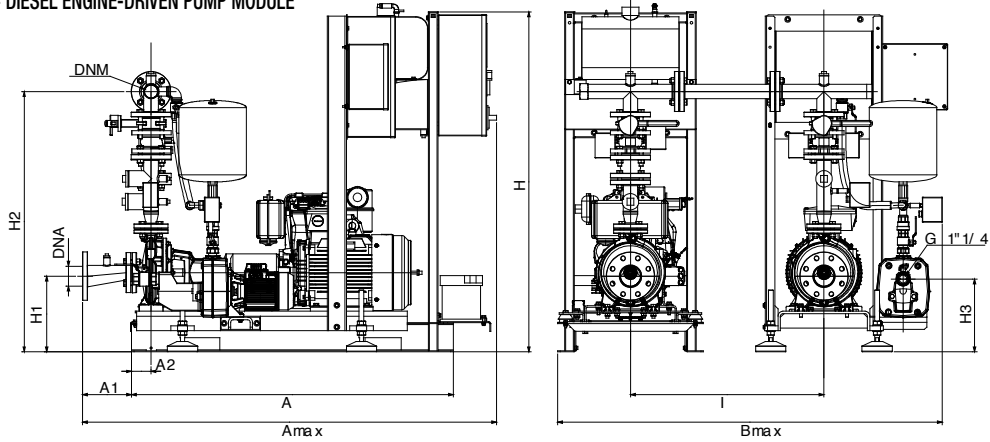


2 DIESEL ENGINE-DRIVEN PUMP MODULES

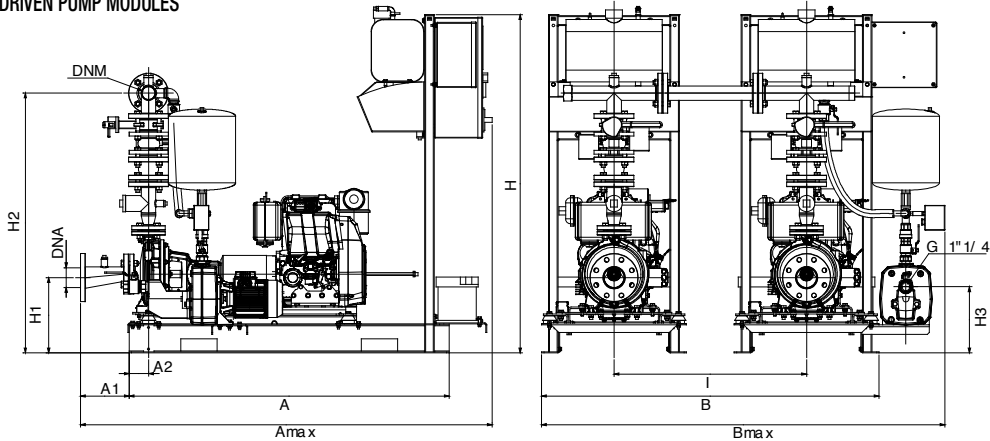

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 40-160/161 - DIESEL ENGINE DRIVEN PUMP MODULE	1330	207	81	1715	602	-	876	1525	280	1219	274	-	-	-	DN 100	2" 1/2	395	435
1 KDN 40-160/161 - ELECTRIC PUMP MODULE	1000	237	60	1237	462	340	723	1421	167	1124	213	-	-	-	DN 100	2" 1/2	275	310
1 KDN 40-160/161 - 2 ELECTRIC PUMP MODULES	1000	240	60	1240	1324	-	1585	1421	167	1124	213	-	-	800	DN 100	2" 1/2	550	585
1 KDN 40-160/161 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1330	207	81	1715	1604	-	1878	1525	280	1219	274	-	-	800	DN 100	2" 1/2	670	705
1 KDN 40-160/161 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1330	207	81	1715	1604	-	1878	1525	280	1219	274	-	-	800	DN 100	2" 1/2	790	830

1 KDN 40-160/177 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

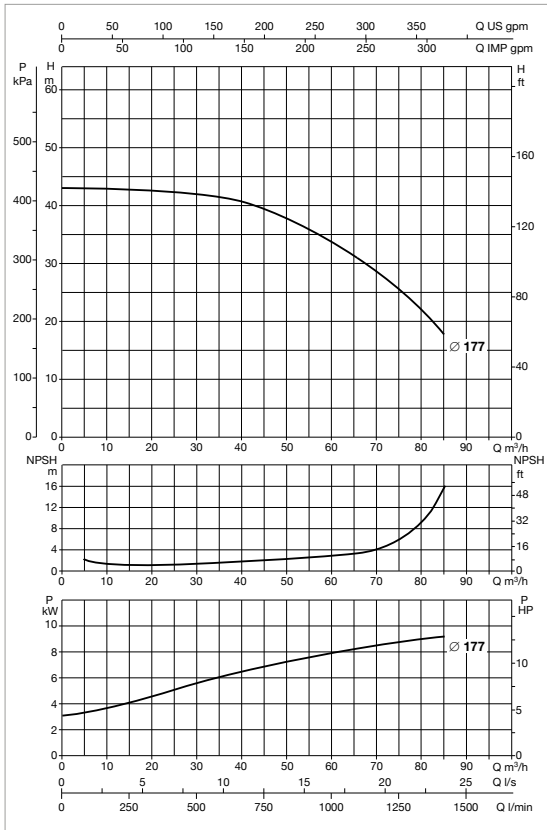

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 40-160/177 11	3 x 400 V ~	JET 251 T	11	1,85	19,4	KDN 40 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 40-160/177 MD	3 x 230 / 400 V ~	JET 251 T	11	1,85	KDN 40 EN 12845	0,22 m²

* Jockey pump on request.


** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE

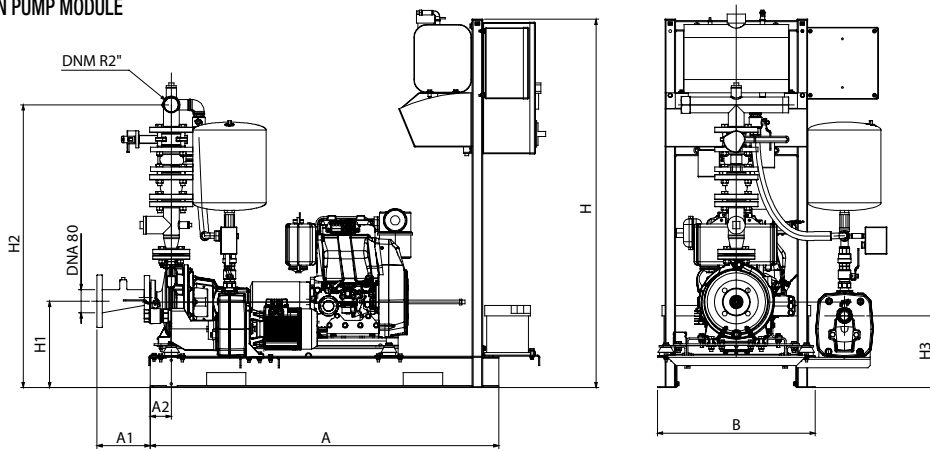


ELECTRIC PUMP MODULE

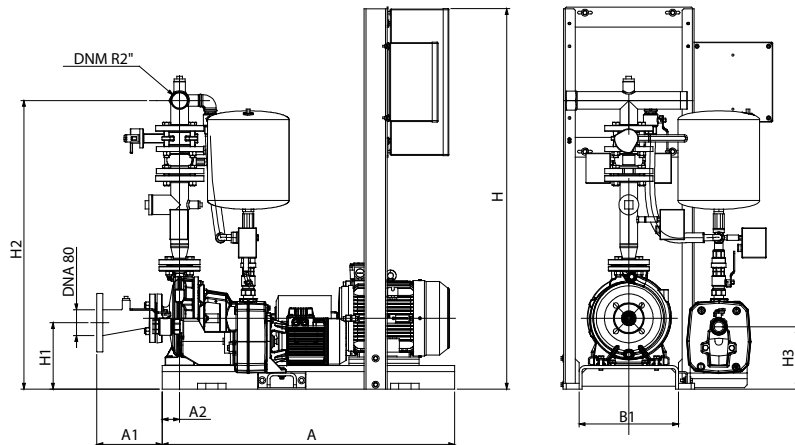


1 KDN 40-160/177 - UNI EN 12845 FIRE FIGHTING PUMPS SETS


2 ELECTRIC PUMP MODULES

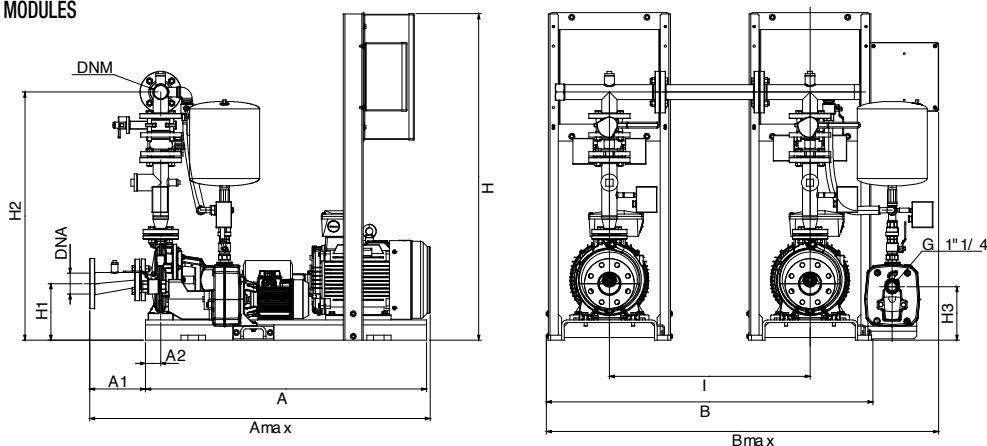

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP MODULE

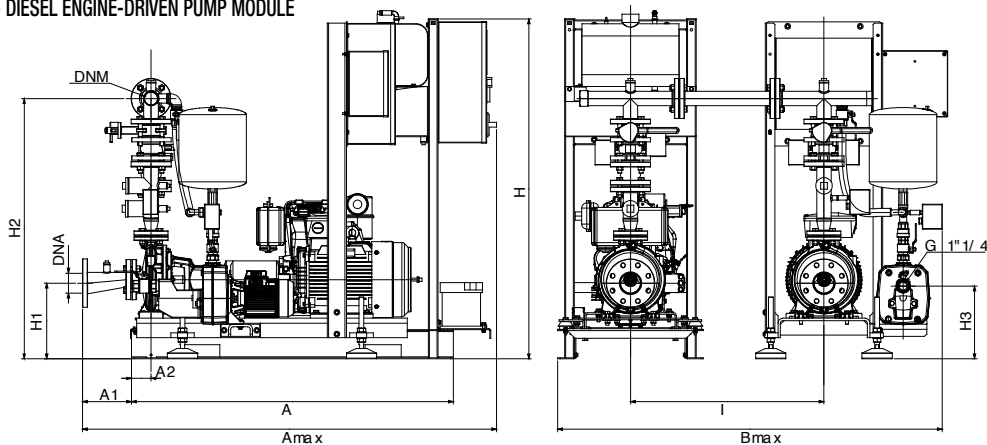


2 DIESEL ENGINE-DRIVEN PUMP MODULES

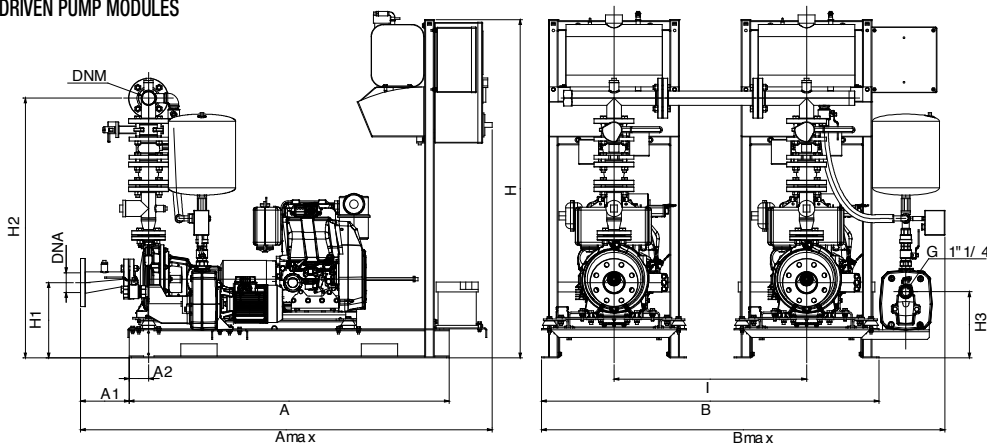

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 40-160/177 - DIESEL ENGINE DRIVEN PUMP MODULE	1330	207	81	1715	602	-	876	1525	280	1219	274	-	-	-	DN 100	2" 1/2	405	445
1 KDN 40-160/177 - ELECTRIC PUMP MODULE	1120	247	60	1362	502	380	763	1421	223	1157	213	-	-	-	DN 100	2" 1/2	403	415
1 KDN 40-160/177 - 2 ELECTRIC PUMP MODULES	1120	247	60	1382	1404	-	1665	1421	223	1157	213	-	-	800	DN 100	2" 1/2	806	818
1 KDN 40-160/177 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1330	207	81	1715	1604	-	1878	1525	280	1219	274	-	-	800	DN 100	2" 1/2	808	820
1 KDN 40-160/177 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1330	207	81	1715	1604	-	1878	1525	280	1219	274	-	-	800	DN 100	2" 1/2	810	850

1 KDN 40-200/200-219 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

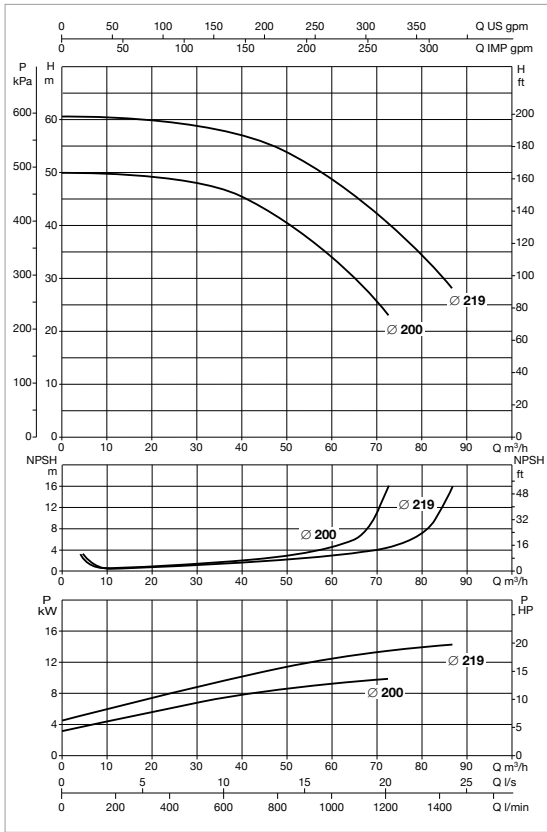

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 40-200/200 11	3 x 400 V ~	JET 251 T	11	1,85	13,4	KDN 40 EN 12845
1 KDN 40-200/219 15	3 x 400 V ~	JET 251 T	15	1,85	26,5	KDN 40 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 40-200/200 MD	3 x 230 / 400 V ~	JET 251 T	11	1,85	KDN 40 EN 12845	0,22 m²
1 KDN 40-200/219 MD	3 x 230 / 400 V ~	JET 251 T	15	1,85	KDN 40 EN 12845	0,22 m²

* Jockey pump on request.


** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE



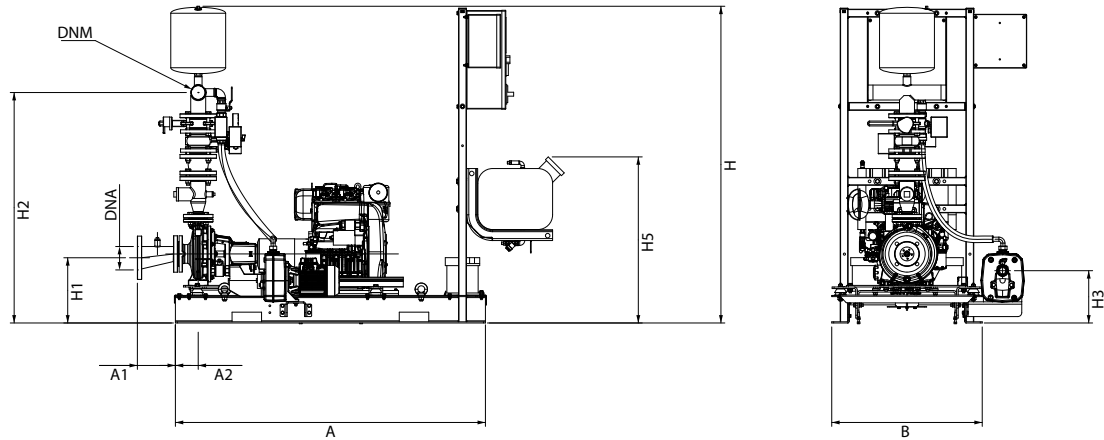


ELECTRIC PUMP MODULE

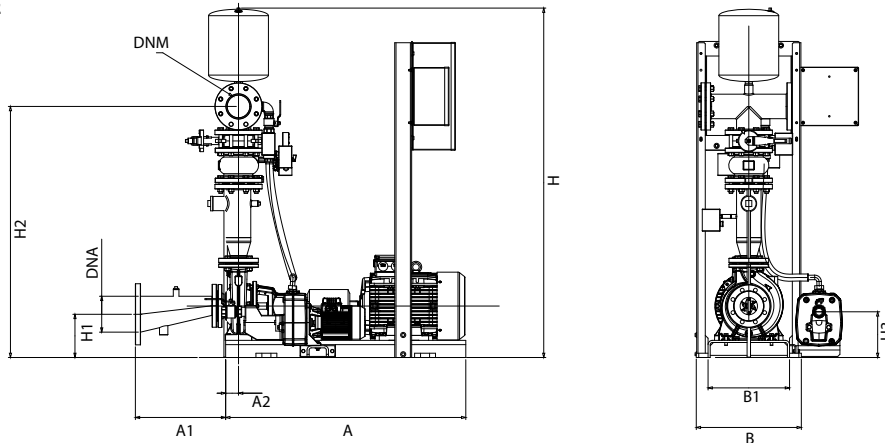

The dashed components are not included in the standard supply.

1 KDN 40-200/200-219 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

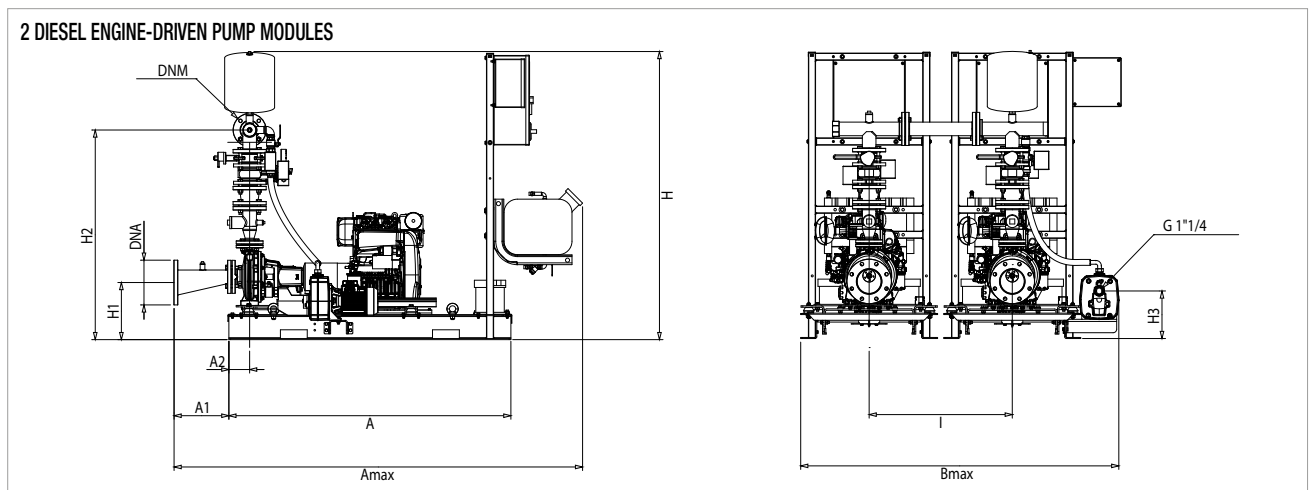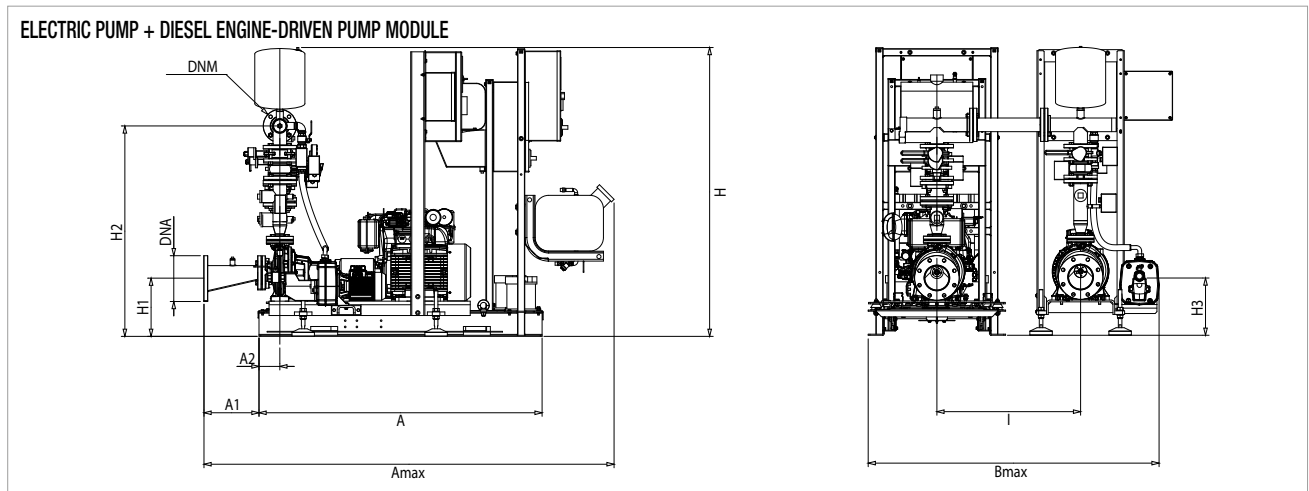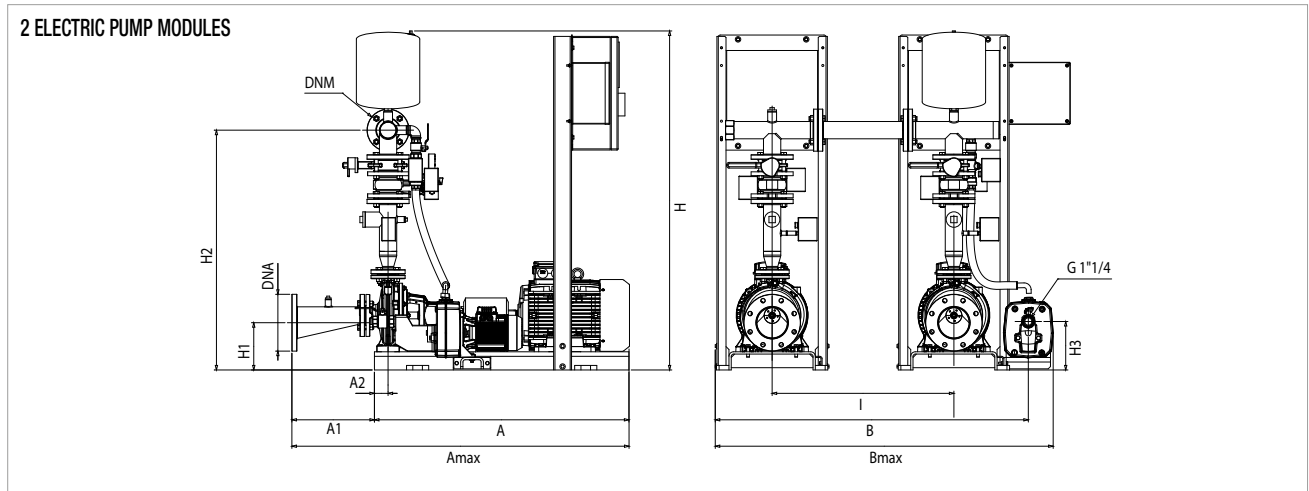


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 40-200/200-219 - DIESEL ENGINE DRIVEN PUMP MODULE	1576	193	116	2170	765	-	991	1730	322	1291	266	-	844	-	DN 100	2" 1/2	443	475
1 KDN 40-200/200-219 - ELECTRIC PUMP MODULE	1120	247	60	1382	502	430	757	1588	221	1175	213	-	-	-	DN 100	2" 1/2	425	455
1 KDN 40-200/200-219 - 2 ELECTRIC PUMP MODULES	1120	247	60	1382	1404	-	1659	1588	221	1175	213	-	-	800	DN 100	2" 1/2	850	880
1 KDN 40-200/200-219 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1576	193	116	2170	1930	-	2156	1730	322	1291	266	-	844	800	DN 100	2" 1/2	868	898
1 KDN 40-200/200-219 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1576	193	116	2170	1930	-	2156	1730	322	1291	266	-	844	800	DN 100	2" 1/2	886	918

1 KDN 40-250/230 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

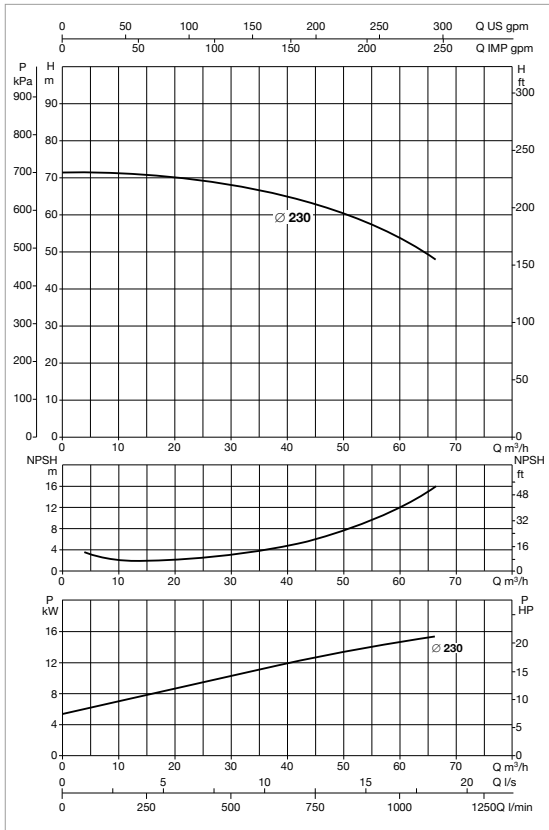

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 40-250/230 15	3 x 400 V ~	JET 251 T	15	1,85	26,5	KDN 40 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 40-250/230 MD	3 x 230 / 400 V ~	JET 251 T	19	1,85	KDN 40 EN 12845	0,22 m²

* Jockey pump on request.


** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE



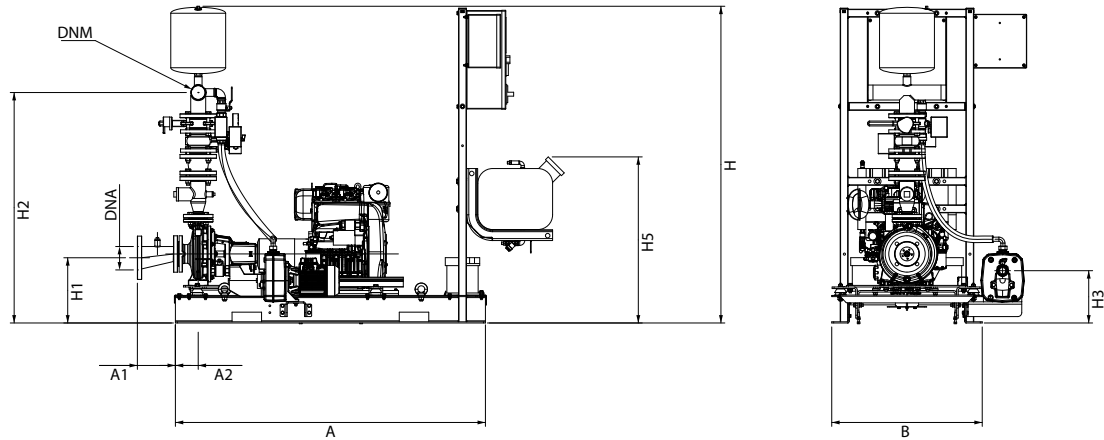


ELECTRIC PUMP MODULE

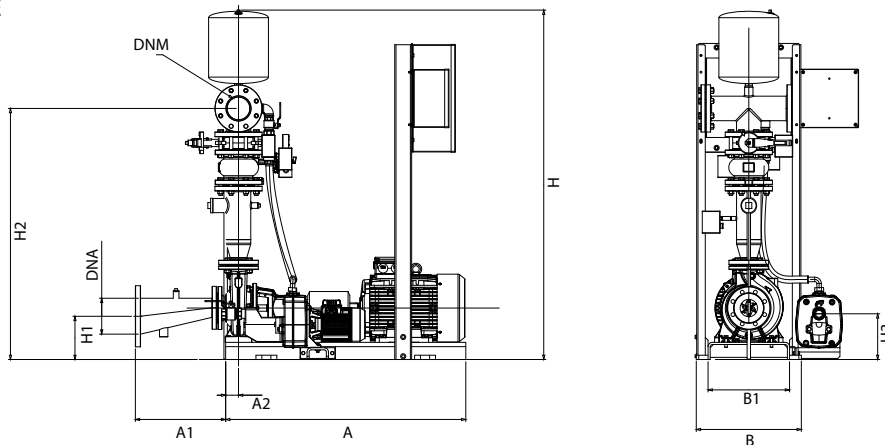

The dashed components are not included in the standard supply.

1 KDN 40-250/230 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

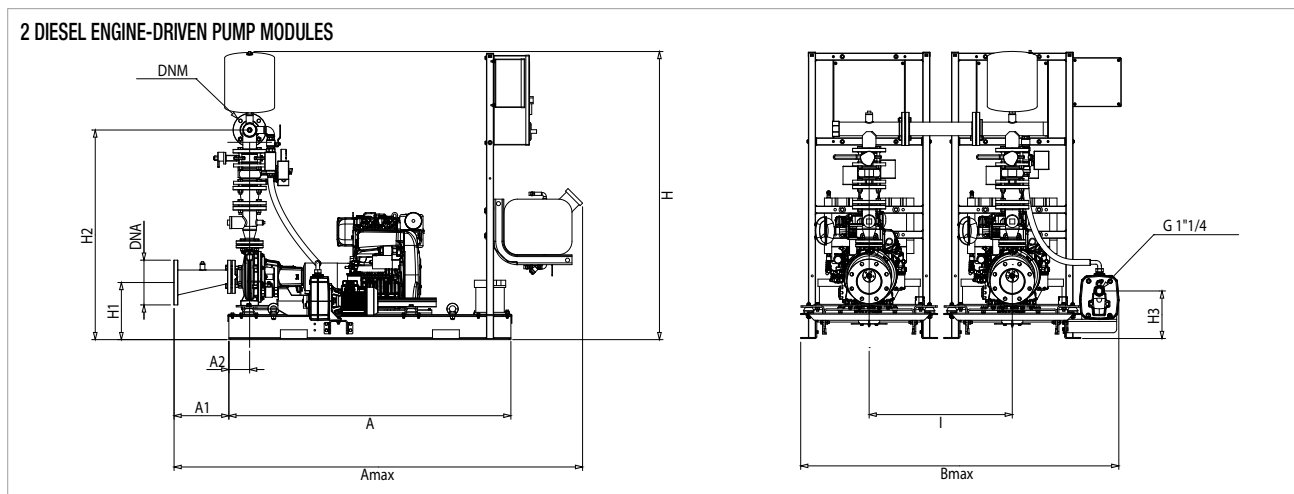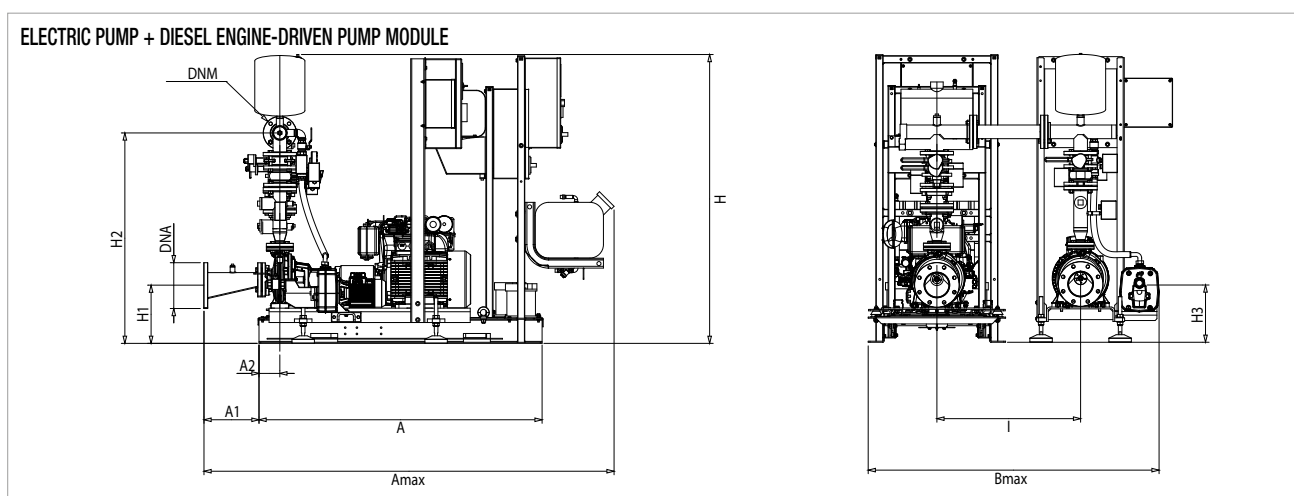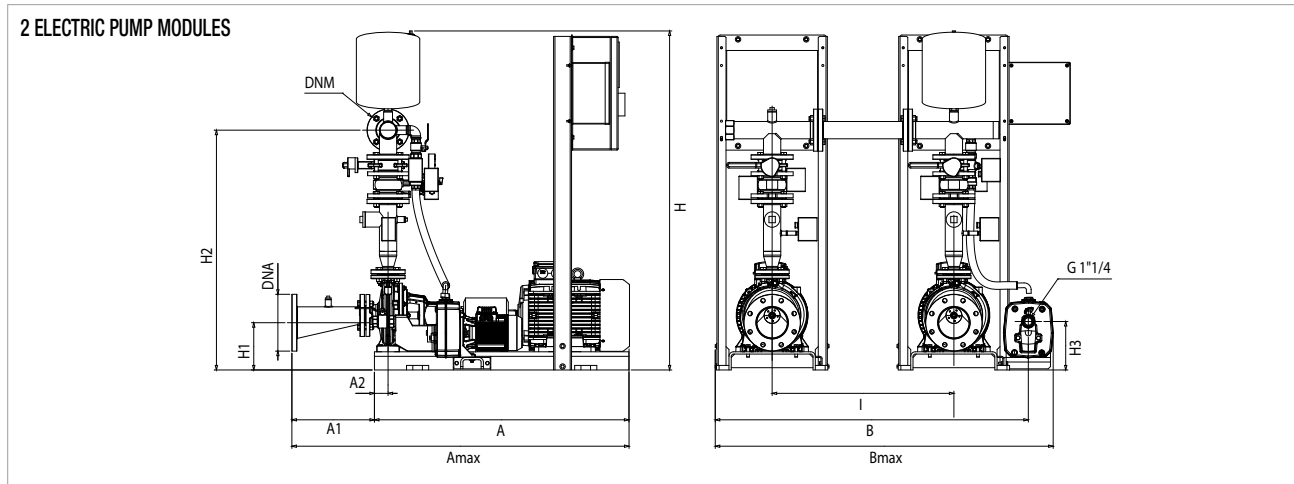


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 40-250/230 - DIESEL ENGINE DRIVEN PUMP MODULE	1576	193	116	2170	978	-	991	1795	352	1356	266	-	844	-	DN 100	2" 1/2	502	558
1 KDN 40-250/230 - ELECTRIC PUMP MODULE	1250	232	75	1494	542	430	812	1675	241	1240	213	-	-	-	DN 100	2" 1/2	447	477
1 KDN 40-250/230 - 2 ELECTRIC PUMP MODULES	1250	232	75	1494	1484	-	1754	1675	241	1240	213	-	-	800	DN 100	2" 1/2	894	924
1 KDN 40-250/230 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1576	193	116	2170	2143	-	2369	1795	352	1356	266	-	844	800	DN 100	2" 1/2	949	979
1 KDN 40-250/230 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1576	193	116	2170	2143	-	2369	1795	352	1356	266	-	844	800	DN 100	2" 1/2	1004	1060

1 KDN 40-250/240 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

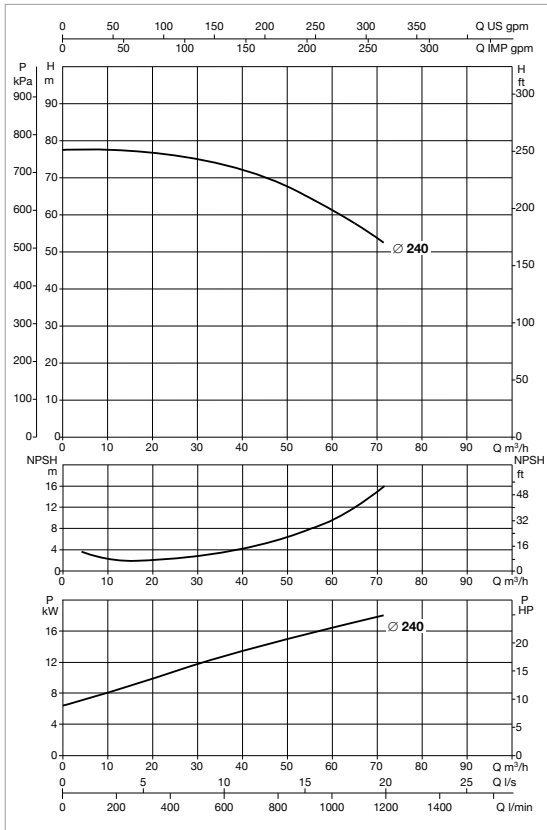

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 40-250/240 18,5	3 x 400 V ~	JET 251 T	18,5	1,85	32	KDN 40 EN 12845



KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP

MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 40-250/240 MD	3 x 230 / 400 V ~	JET 251 T	19	1,85	KDN 40 EN 12845	0,22 m²

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

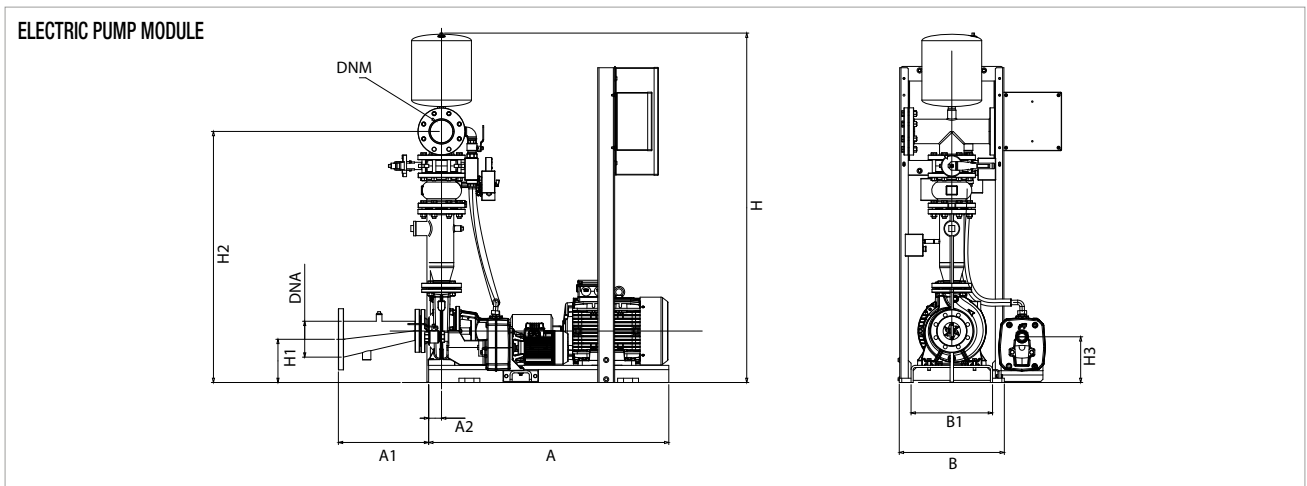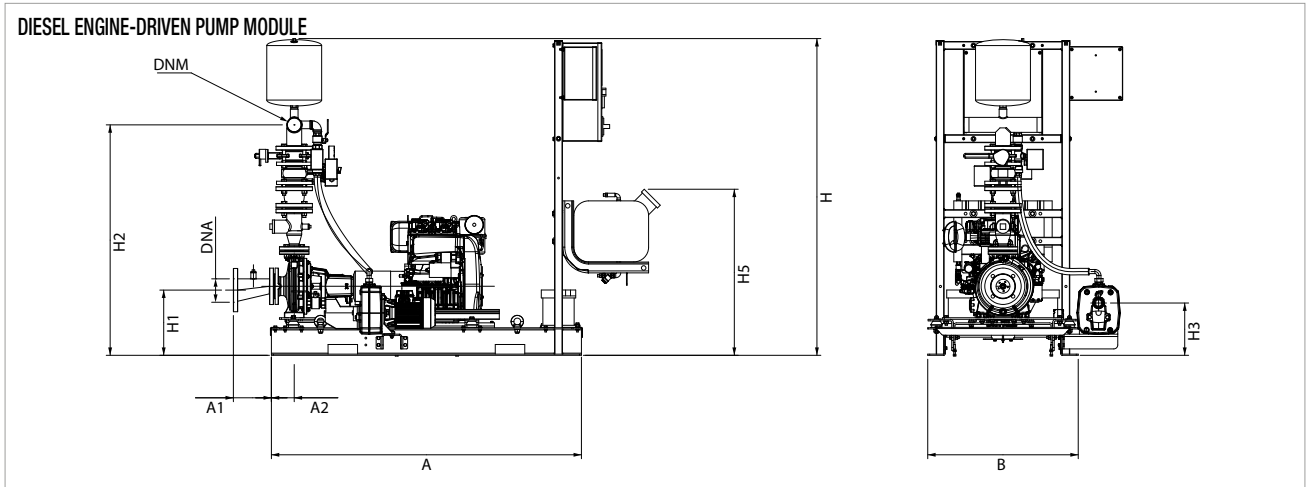


The dashed components are not included in the standard supply.

1 KDN 40-250/240 - UNI EN 12845 FIRE FIGHTING PUMPS SETS


2 ELECTRIC PUMP MODULES

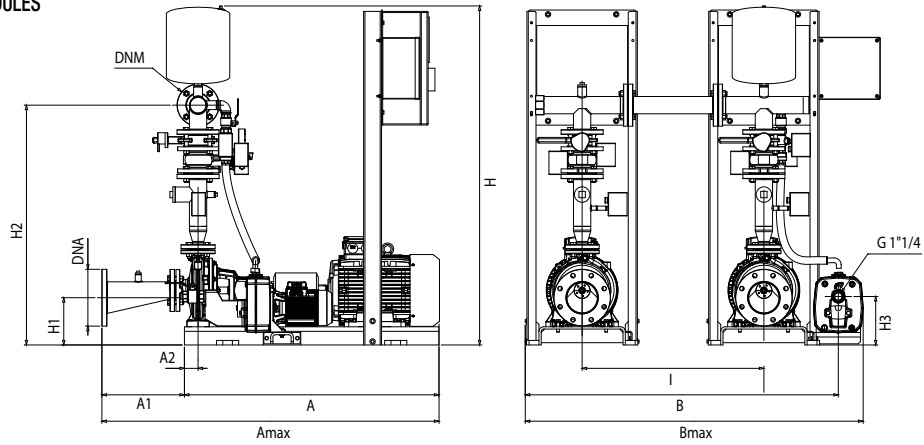

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP MODULE

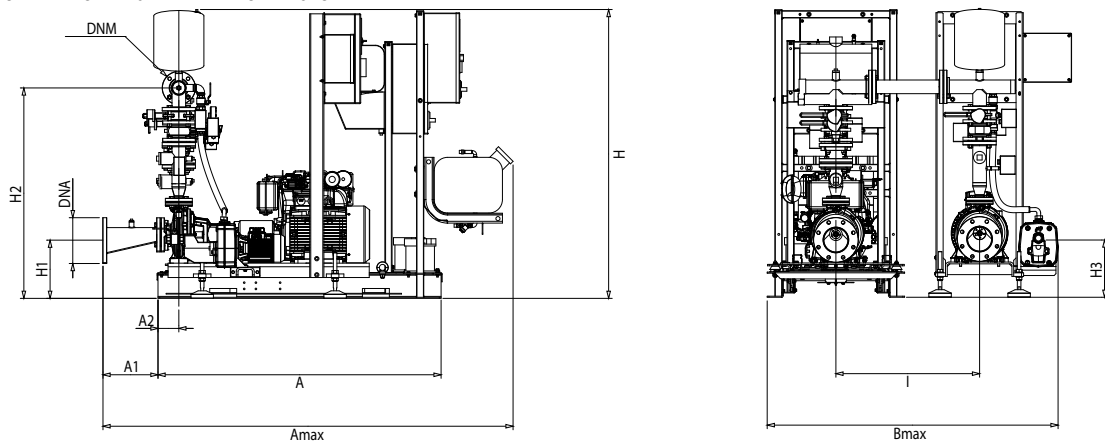

2 DIESEL ENGINE-DRIVEN PUMP MODULES

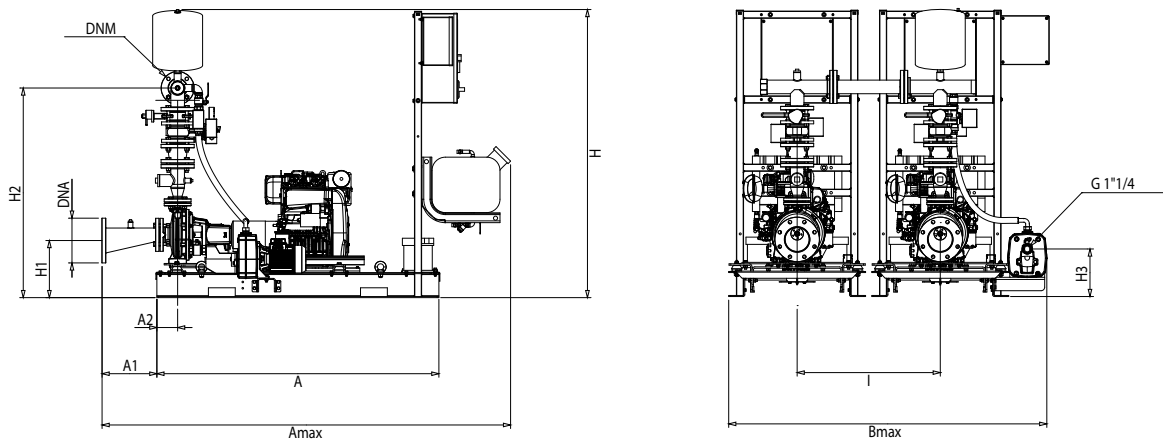


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 40-250/240 - MODULO MOTOPOMPA DIESEL	1576	193	116	2170	978	-	991	1795	352	1356	266	-	844	-	DN 100	2" 1/2	539	570
1 KDN 40-250/240 - MODULO ELETTROPOMPA	1250	232	75	1494	542	430	812	1682	241	1240	213	-	-	-	DN 100	2" 1/2	467	497
1 KDN 40-250/240 - 2 MODULI ELETTROPOMPA	1250	232	75	1494	1484	-	1754	1682	241	1240	213	-	-	800	DN 100	2" 1/2	934	964
1 KDN 40-250/240 - MODULO ELETTROPOMPA + MOTOPOMPA DIESEL	1576	193	116	2170	2143	-	2369	1795	352	1356	266	-	844	800	DN 100	2" 1/2	1006	1036
1 KDN 40-250/240 - 2 MODULI MOTOPOMPA DIESEL	1576	193	116	2170	2143	-	2369	1795	352	1356	266	-	844	800	DN 100	2" 1/2	1078	1109

1 KDN 40-250/260 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

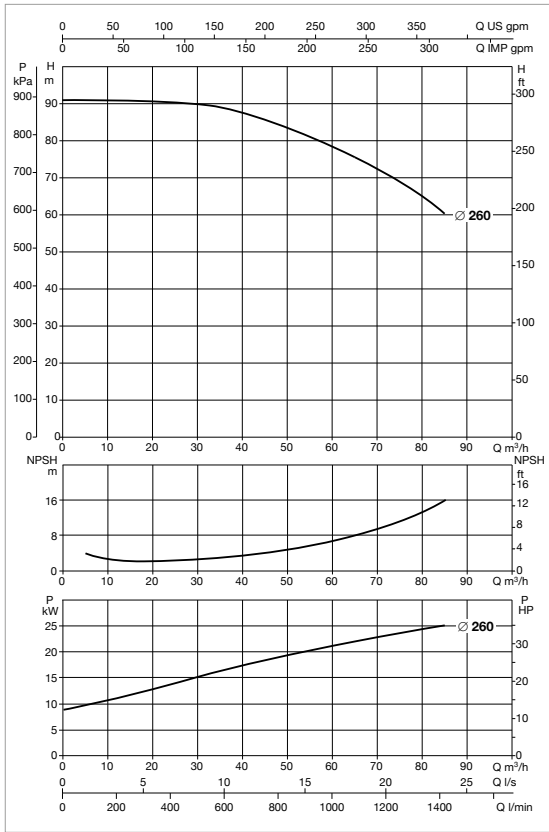

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 40-250/260 30	3 x 400 V ~	JET 251 T	30	1,85	52	KDN 40 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 40-250/260 MD	3 x 230 / 400 V ~	JET 251 T	26	1,85	KDN 40 EN 12845	0,22 m²

* Jockey pump on request.


** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE



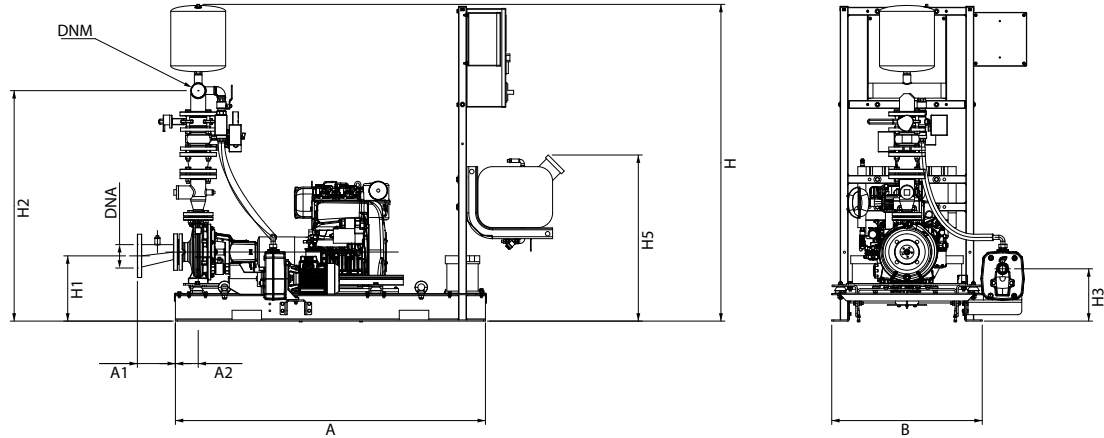


ELECTRIC PUMP MODULE

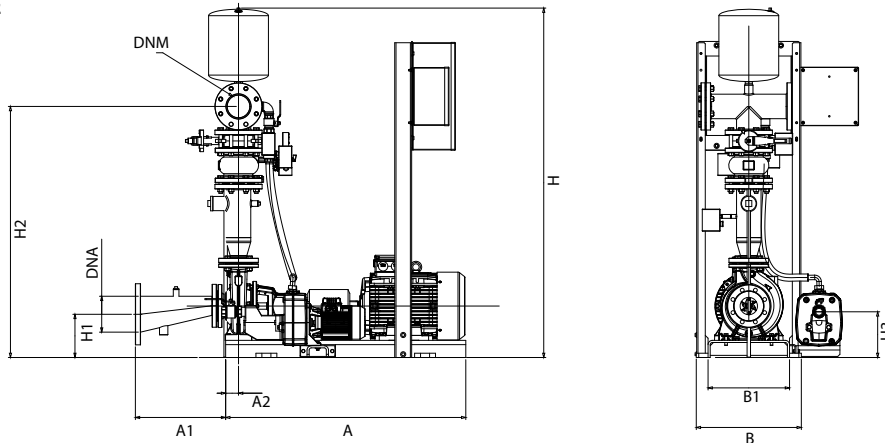

The dashed components are not included in the standard supply.

1 KDN 40-250/260 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

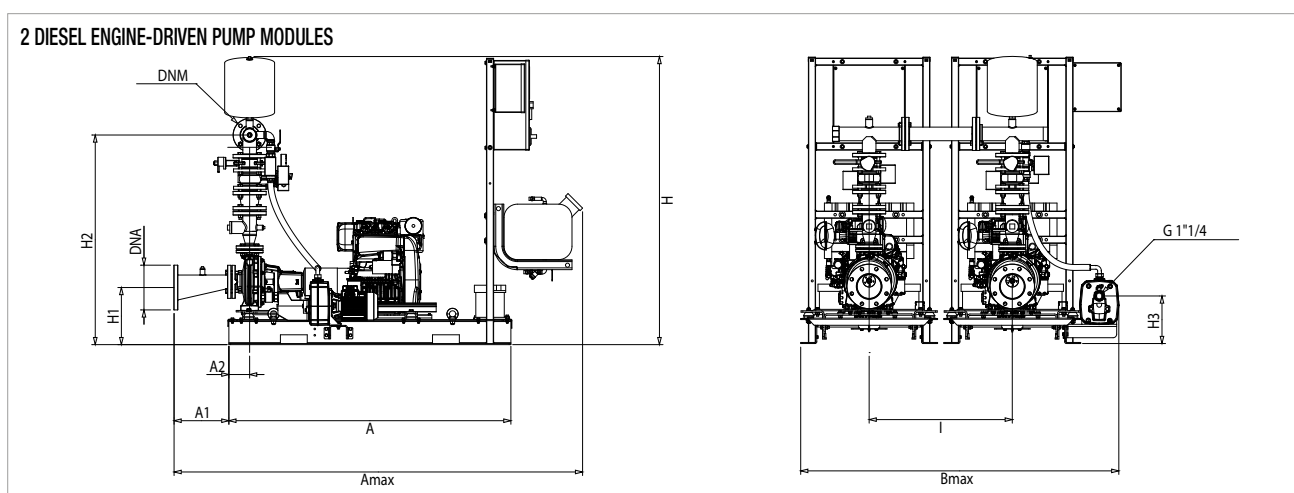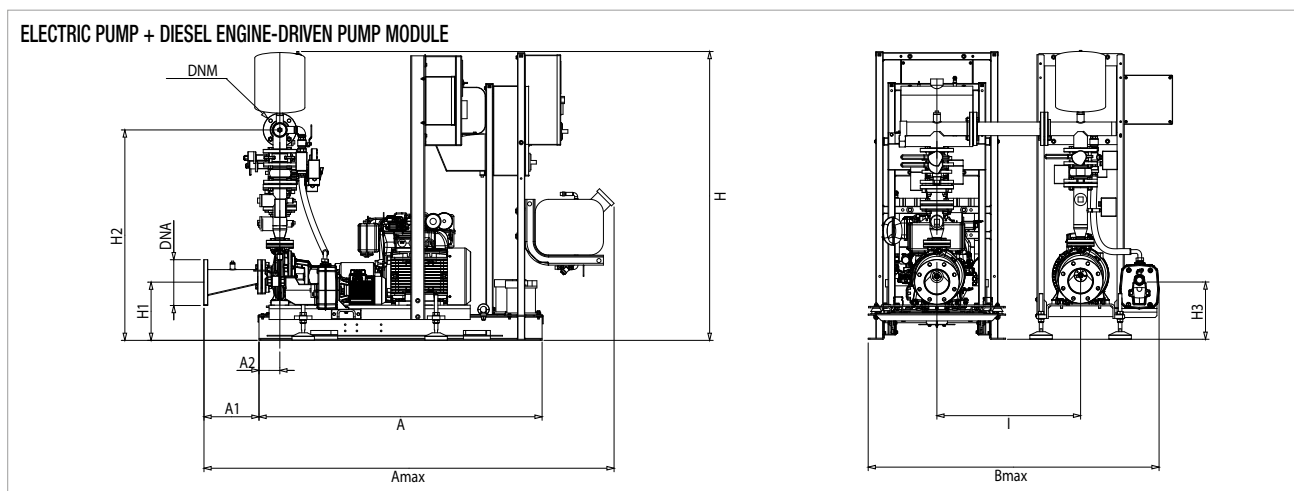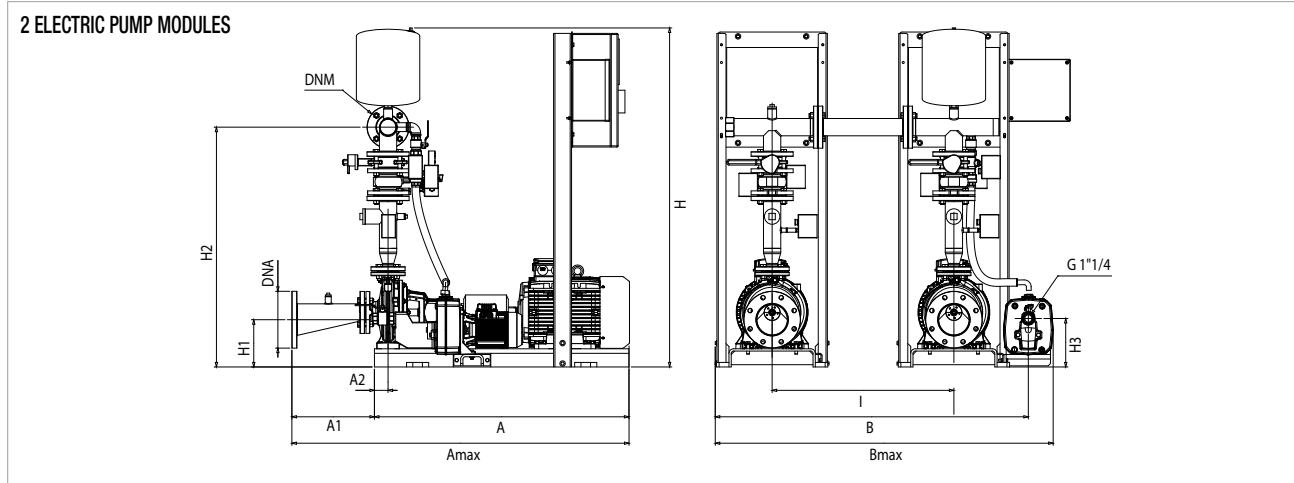


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 40-250/260 - DIESEL ENGINE DRIVEN PUMP MODULE	1576	193	116	2170	978	-	1033	1795	352	1356	266	-	844	-	DN 100	2" ½	585	615
1 KDN 40-250/260 - ELECTRIC PUMP MODULE A	1400	232	75	1632	550	480	550	1752	281	1280	213	-	-	-	DN 100	2" ½	665	695
1 KDN 40-250/260 - 2 ELECTRIC PUMP MODULES	1400	232	75	1632	1500	-	1500	1752	281	1280	213	-	-	800	DN 100	2" ½	1390	1420
1 KDN 40-250/260 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1576	193	116	2170	2356	-	2411	1795	352	1356	266	-	844	800	DN 100	2" ½	1280	1310
1 KDN 40-250/260 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1576	193	116	2170	2356	-	2411	1795	352	1356	266	-	844	800	DN 100	2" ½	1170	1200

1 KDN 50-160/161 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

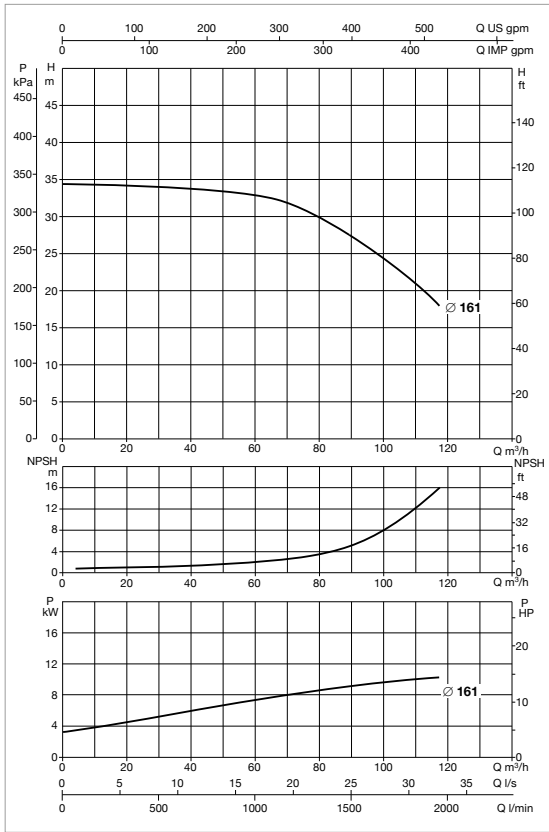

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 50-160/161 11	3 x 400 V ~	JET 251 T	11	1,85	19,4	KDN 50 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 50-160/161 MD	3 x 230 / 400 V ~	JET 251 T	11	1,85	KDN 50 EN 12845	0,22 m²

* Jockey pump on request.


** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE



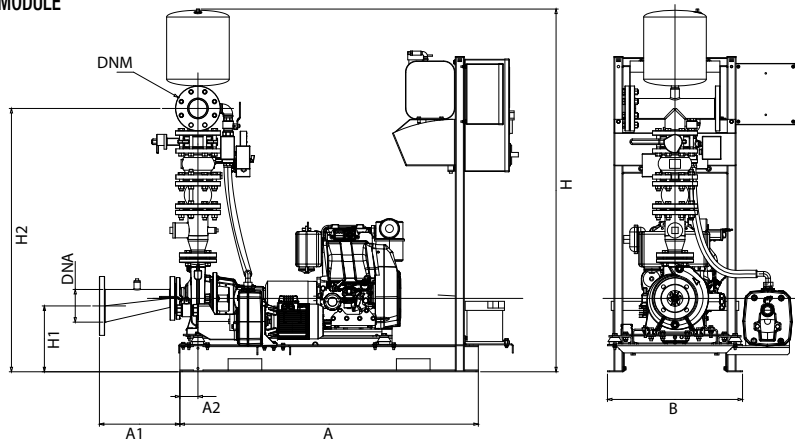


ELECTRIC PUMP MODULE

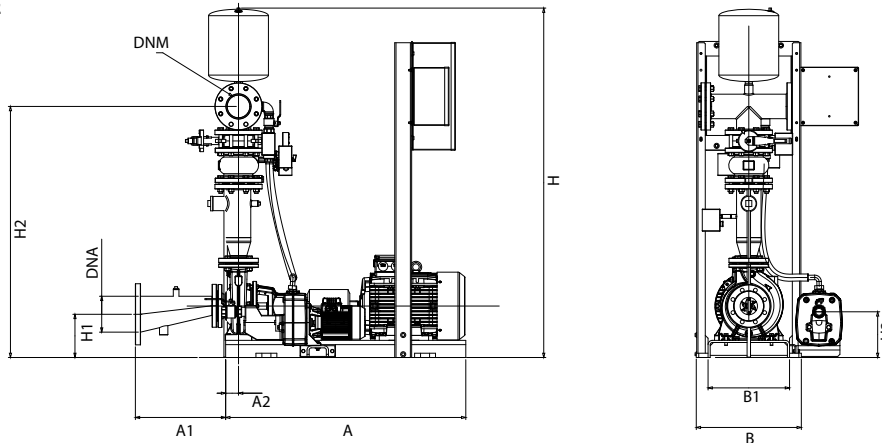

The dashed components are not included in the standard supply.

1 KDN 50-160/161 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

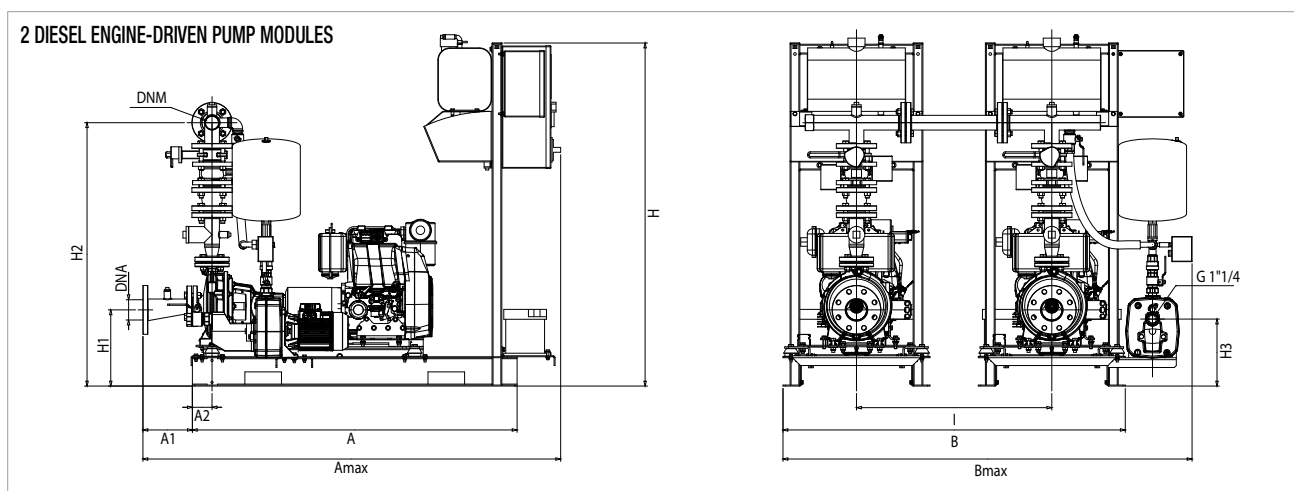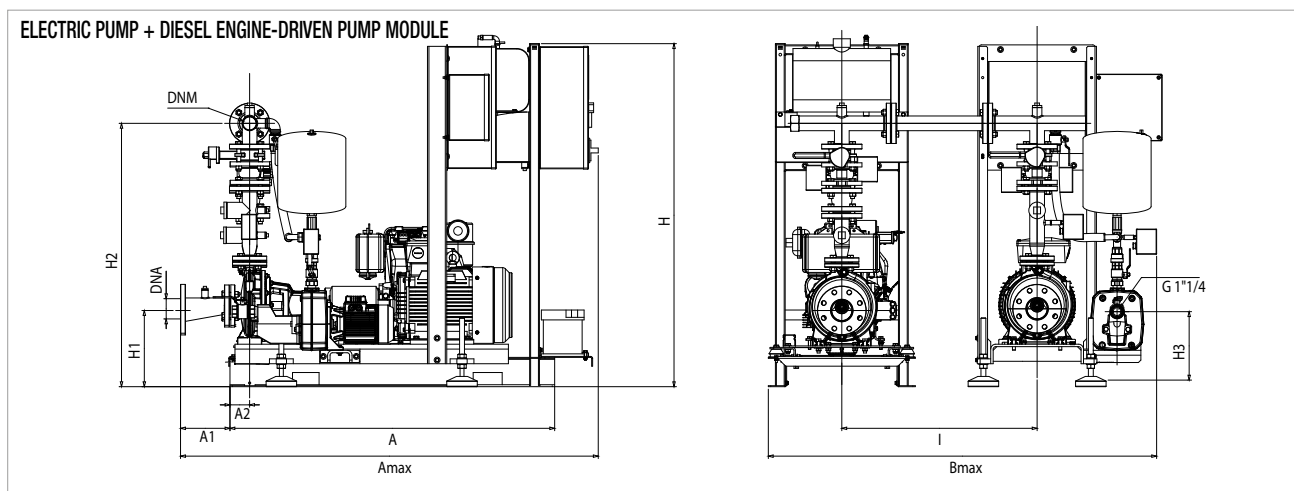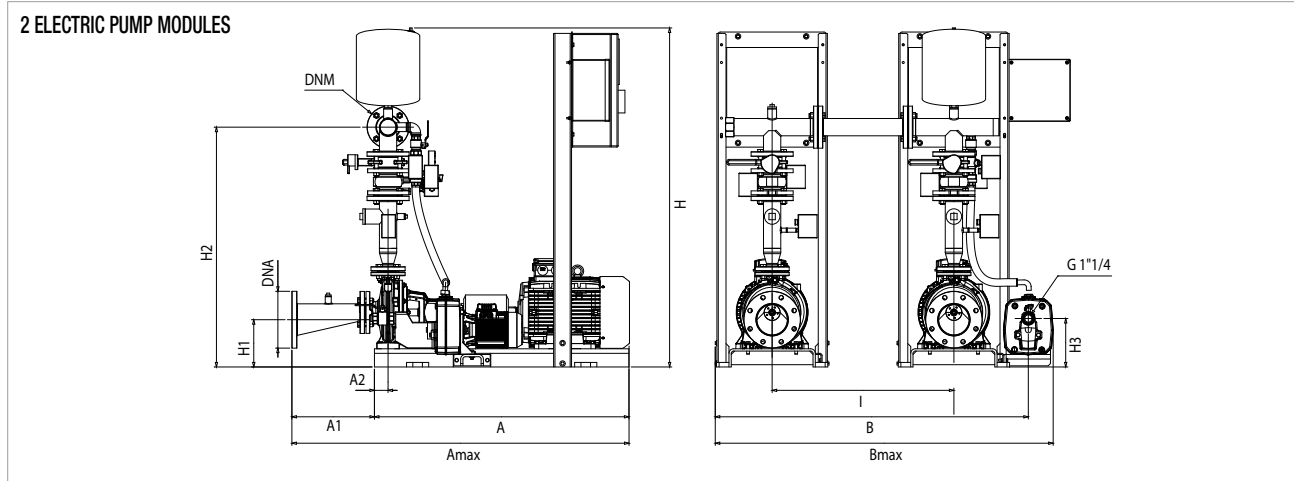


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 50-160/161 - DIESEL ENGINE DRIVEN PUMP MODULE	1330	359	81	1867	602	-	841	1736	293	1293	274	-	-	-	DN 125	DN 80	341	375
1 KDN 50-160/161 - ELECTRIC PUMP MODULE	1120	363	60	1483	490	380	762	1640	208	1200	213	-	-	-	DN 125	DN 80	471	496
1 KDN 50-160/161 - 2 ELECTRIC PUMP MODULES	1120	363	60	1483	1380	-	1652	1640	208	1200	213	-	-	800	DN 125	DN 80	942	967
1 KDN 50-160/161 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1330	359	81	1867	1604	-	1843	1736	293	1293	274	-	-	800	DN 125	DN 80	812	837
1 KDN 50-160/161 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1330	359	81	1867	1604	-	1843	1736	293	1293	274	-	-	800	DN 125	DN 80	682	716

1 KDN 50-160/177 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

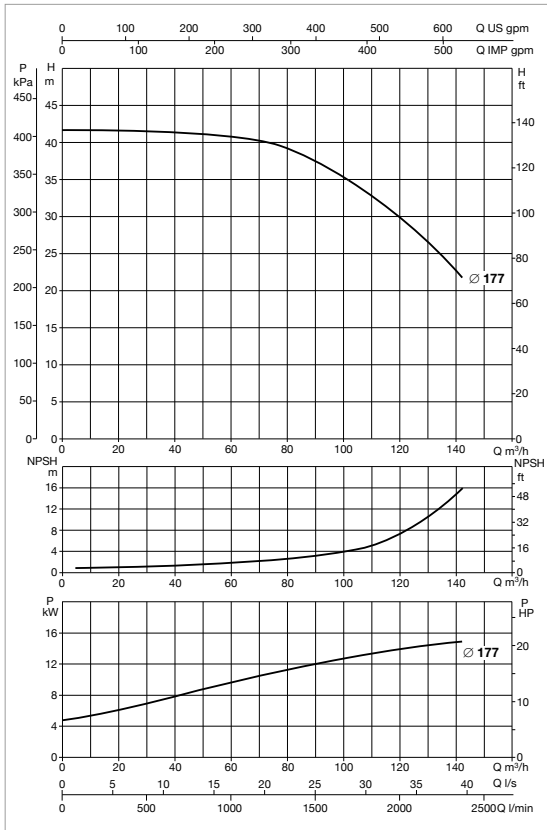

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 50-160/177 15	3 x 400 V ~	JET 251 T	15	1,85	26,5	KDN 50 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 50-160/177 MD	3 x 230 / 400 V ~	JET 251 T	15	1,85	KDN 50 EN 12845	0,22 m²

* Jockey pump on request.


** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE

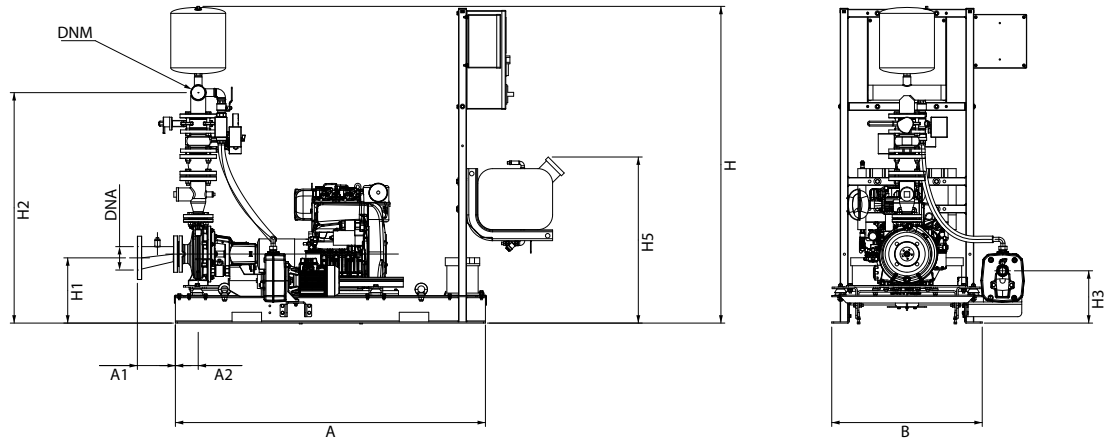


ELECTRIC PUMP MODULE

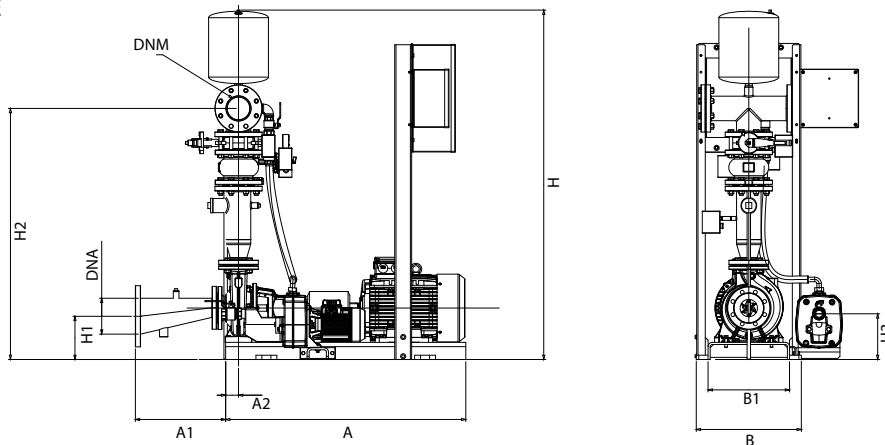


The dashed components are not included in the standard supply.

1 KDN 50-160/177 - UNI EN 12845 FIRE FIGHTING PUMPS SETS


2 ELECTRIC PUMP MODULES

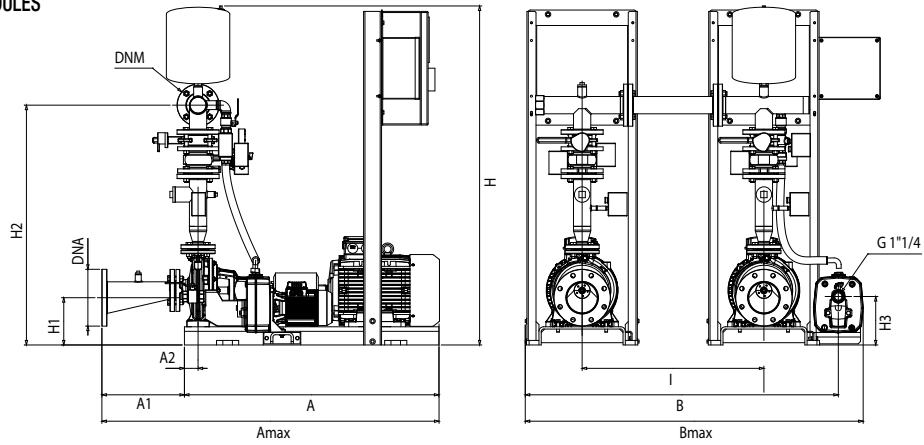

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP MODULE

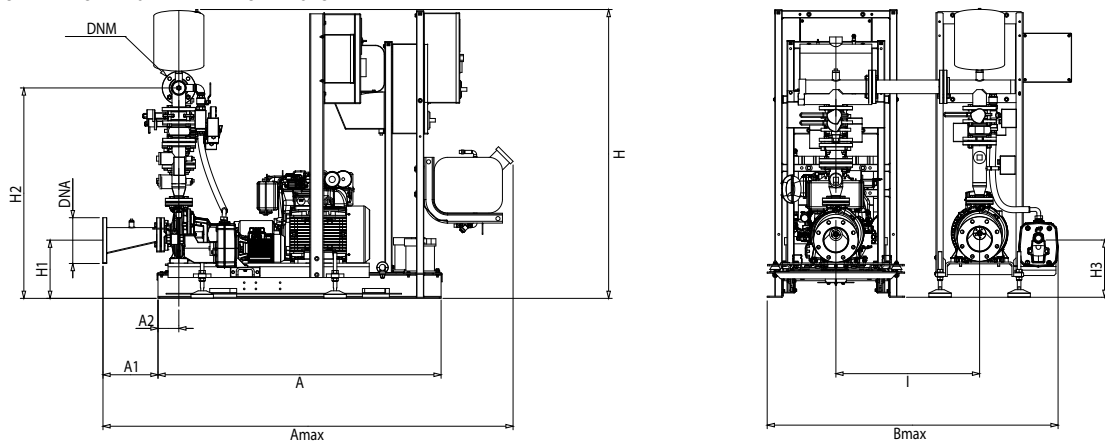

2 DIESEL ENGINE-DRIVEN PUMP MODULES

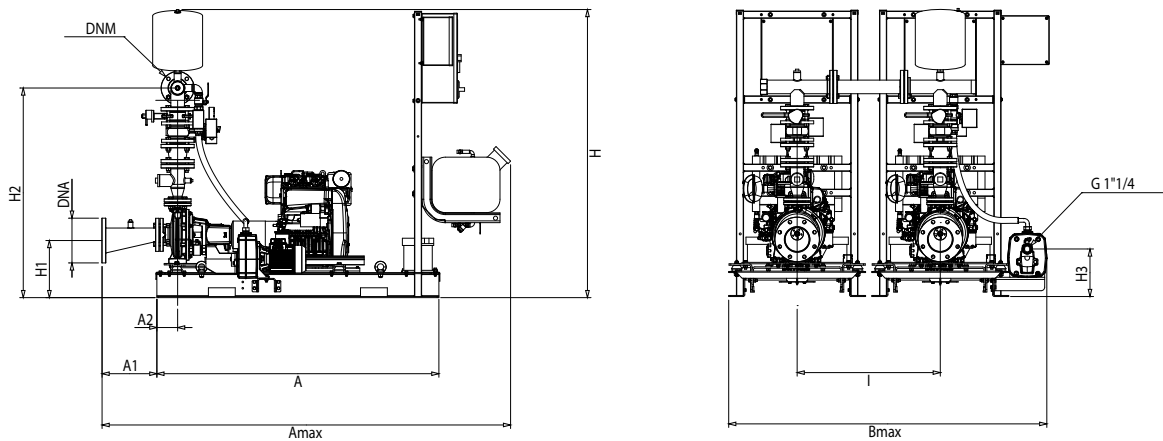


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DN	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 50-160/177 - DIESEL ENGINE DRIVEN PUMP MODULE	1576	306	117	2284	765	-	991	1736	319	1293	266	-	844	-	DN 125	DN 80	435	466
1 KDN 50-160/177 - ELECTRIC PUMP MODULE	1120	363	60	1483	490	380	762	1640	208	1200	213	-	-	-	DN 125	DN 80	480	500
1 KDN 50-160/177 - 2 ELECTRIC PUMP MODULES	1120	363	60	1483	1380	-	1652	1640	208	1200	213	-	-	800	DN 125	DN 80	960	980
1 KDN 50-160/177 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1576	306	117	2284	-	-	2156	1736	319	1293	266	-	844	800	DN 125	DN 80	915	935
1 KDN 50-160/177 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1576	306	117	2284	-	-	2156	1736	319	1293	266	-	844	800	DN 125	DN 80	870	901

1 KDN 50-200/190-210 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

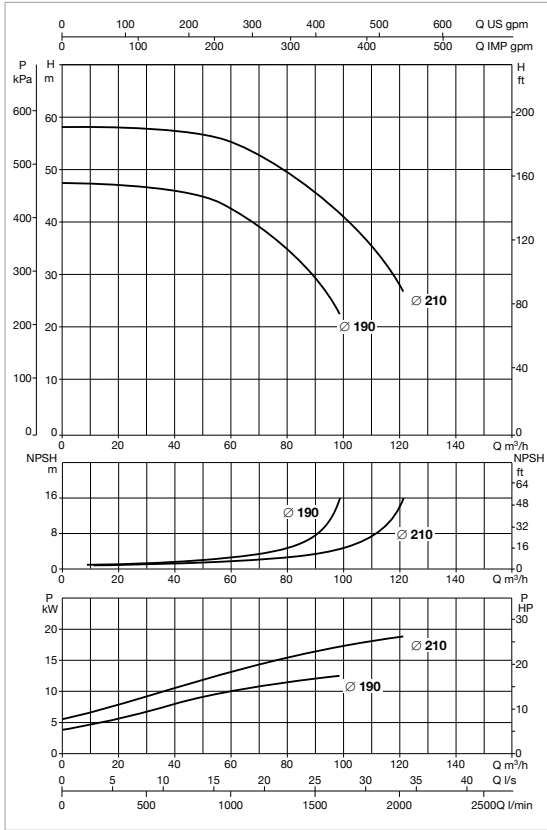

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 50-200/190 15	3 x 400 V ~	JET 251 T	15	1,85	26,5	KDN 50 EN 12845
1 KDN 50-200/210 18,5	3 x 400 V ~	JET 251 T	18,5	1,85	32	KDN 50 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 50-200/190 MD	3 x 230 / 400 V ~	JET 251 T	15	1,85	KDN 50 EN 12845	0,22 m²
1 KDN 50-200/210 MD	3 x 230 / 400 V ~	JET 251 T	19	1,85	KDN 50 EN 12845	0,22 m²

* Jockey pump on request.


** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE



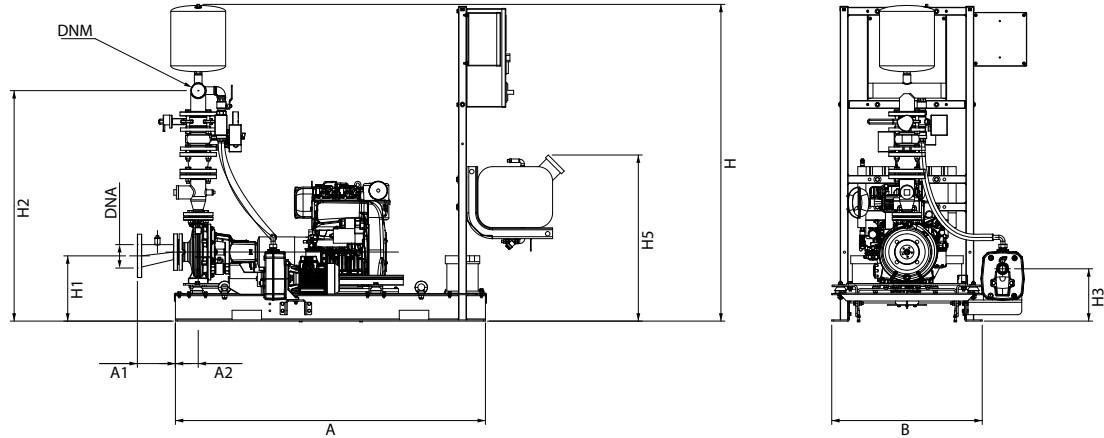


ELECTRIC PUMP MODULE

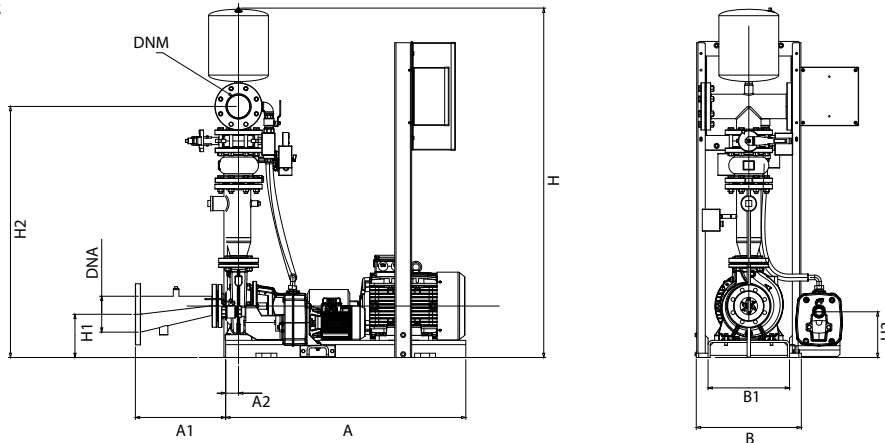

The dashed components are not included in the standard supply.

1 KDN 50-200/190-210 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

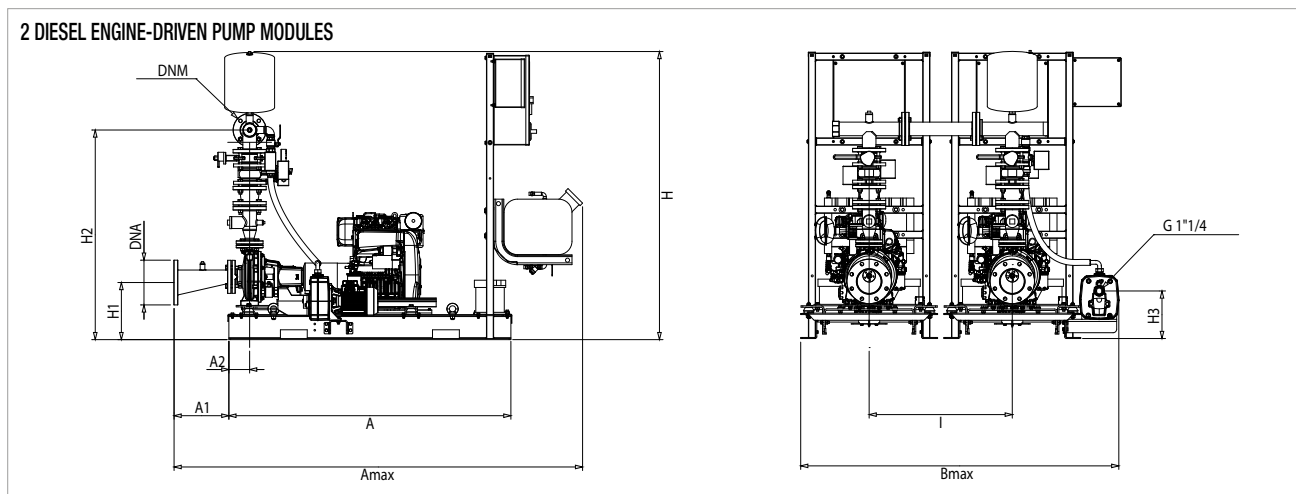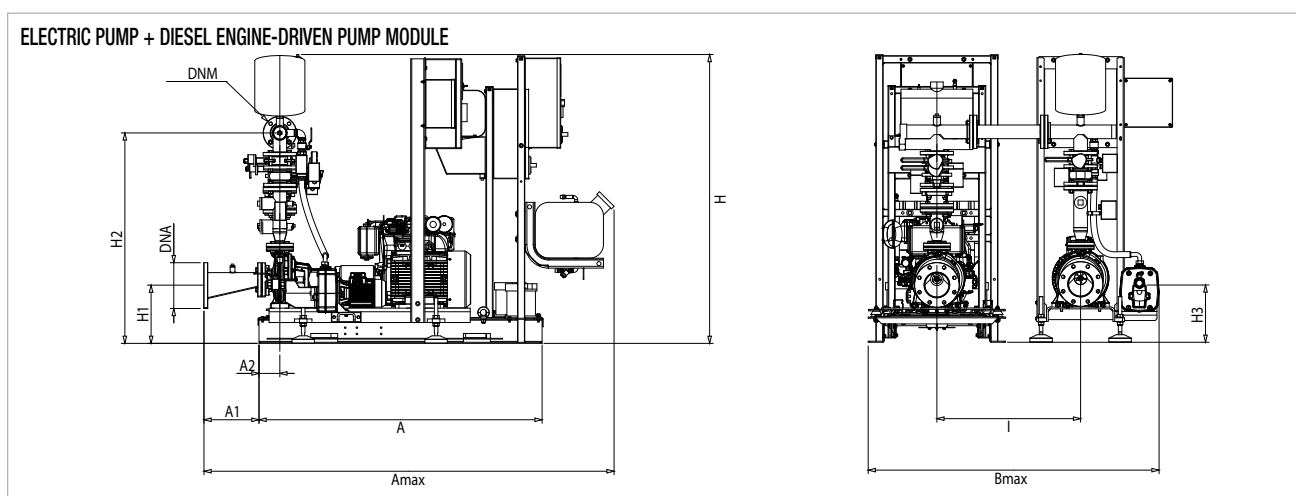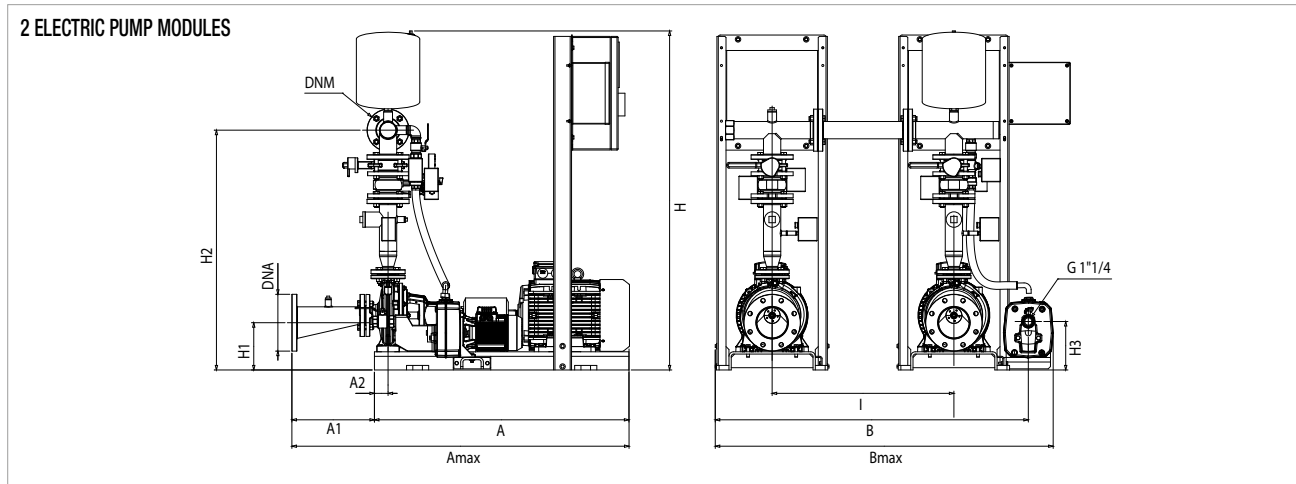


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 50-200/190-210 - DIESEL ENGINE DRIVEN PUMP MODULE	1576	306	117	2284	765	-	991	1771	319	1331	266	-	844	-	DN 125	DN 80	461	481
1 KDN 50-200/190-210 - ELECTRIC PUMP MODULE	1120	363	60	1534	490	380	762	1660	208	1220	213	-	-	-	DN 125	DN 80	571	576
1 KDN 50-200/190-210 - 2 ELECTRIC PUMP MODULES	1120	363	60	1534	1380	-	1652	1660	208	1220	213	-	-	800	DN 125	DN 80	1142	1147
1 KDN 50-200/190-210 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1576	306	117	2284	-	-	2156	1771	319	1331	266	844	-	800	DN 125	DN 80	1032	1037
1 KDN 50-200/190-210 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1576	306	117	2284	-	-	2156	1771	319	1331	266	844	-	800	DN 125	DN 80	922	942

1 KDN 50-200/219 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

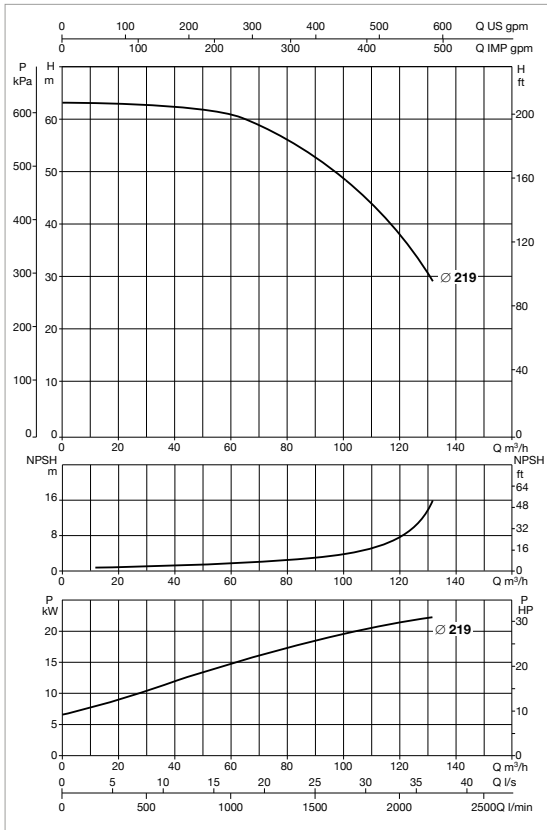

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 50-200/219 22	3 x 400 V ~	JET 251 T	22	1,85	38	KDN 50 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 50-200/219 MD	3 x 230 / 400 V ~	JET 251 T	26	1,85	KDN 50 EN 12845	0,22 m²

* Jockey pump on request.


** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE

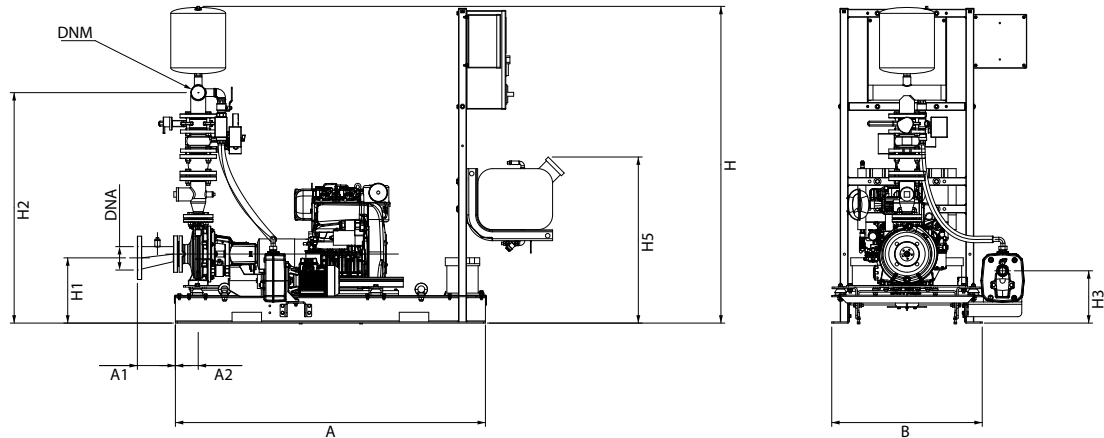


ELECTRIC PUMP MODULE

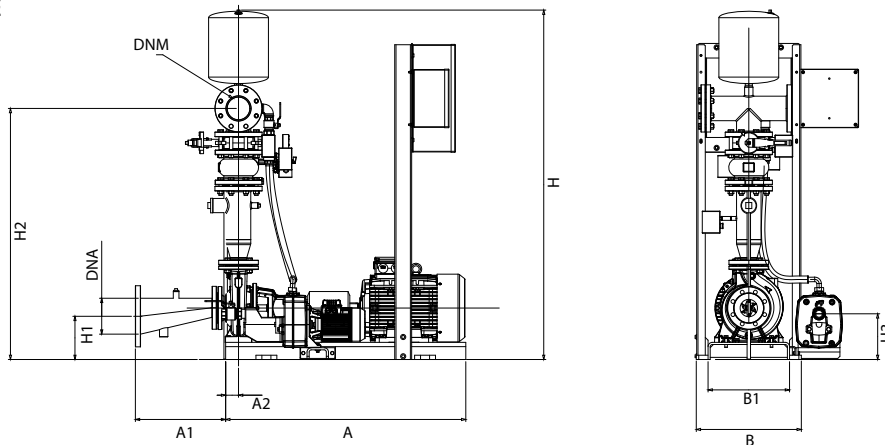


The dashed components are not included in the standard supply.

1 KDN 50-200/219 - UNI EN 12845 FIRE FIGHTING PUMPS SETS


2 ELECTRIC PUMP MODULES

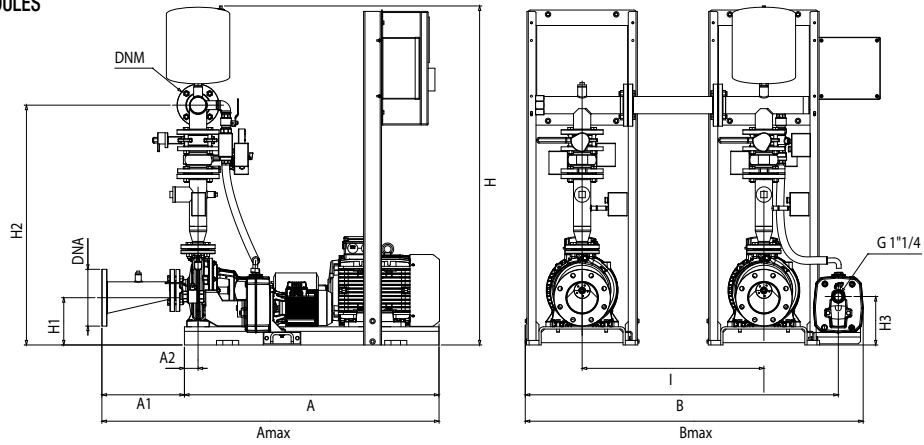

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP MODULE

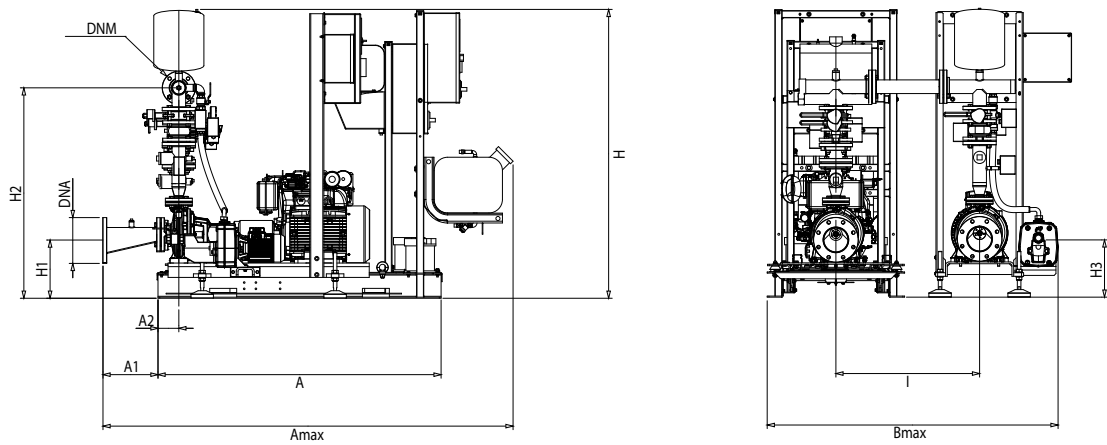

2 DIESEL ENGINE-DRIVEN PUMP MODULES

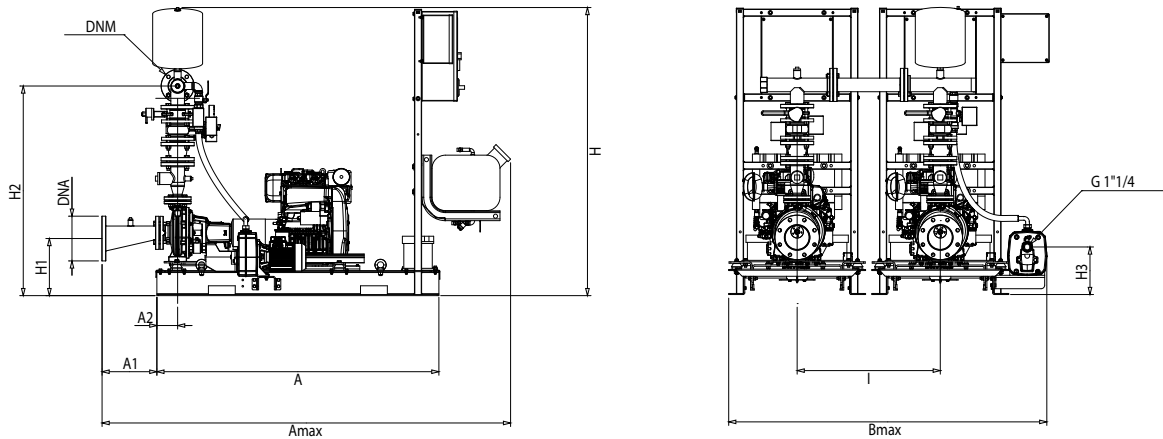


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 50-200/219 - DIESEL ENGINE DRIVEN PUMP MODULE	1576	306	117	2284	765	-	991	1771	319	1331	266	-	844	-	DN 125	DN 80	626	649
1 KDN 50-200/219 - ELECTRIC PUMP MODULE	1120	363	60	1568	490	380	762	1680	228	1240	213	-	-	-	DN 125	DN 80	594	609
1 KDN 50-200/219 - 2 ELECTRIC PUMP MODULES	1120	363	60	1568	1380	-	1652	1680	228	1240	213	-	-	800	DN 125	DN 80	1188	1203
1 KDN 50-200/219 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1576	306	117	2284	-	-	2156	1771	319	1331	266	-	844	800	DN 125	DN 80	1220	1235
1 KDN 50-200/219 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1576	306	117	2284	-	-	2156	1771	319	1331	266	-	844	800	DN 125	DN 80	1252	1275

1 KDN 50-250/230 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

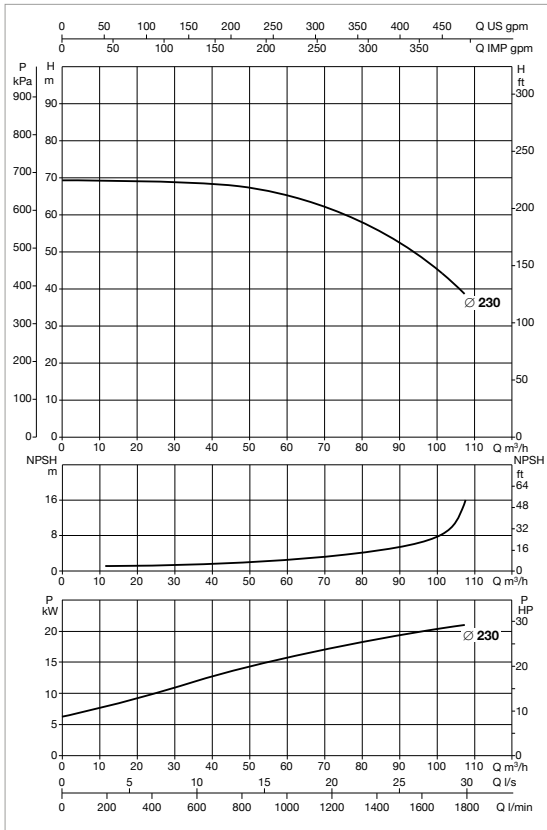

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 50-250/230 22	3 x 400 V ~	JET 251 T	22	1,85	38	KDN 50 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 50-250/230 MD	3 x 230 / 400 V ~	JET 251 T	26	1,85	KDN 50 EN 12845	0,22 m²

* Jockey pump on request.


** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE



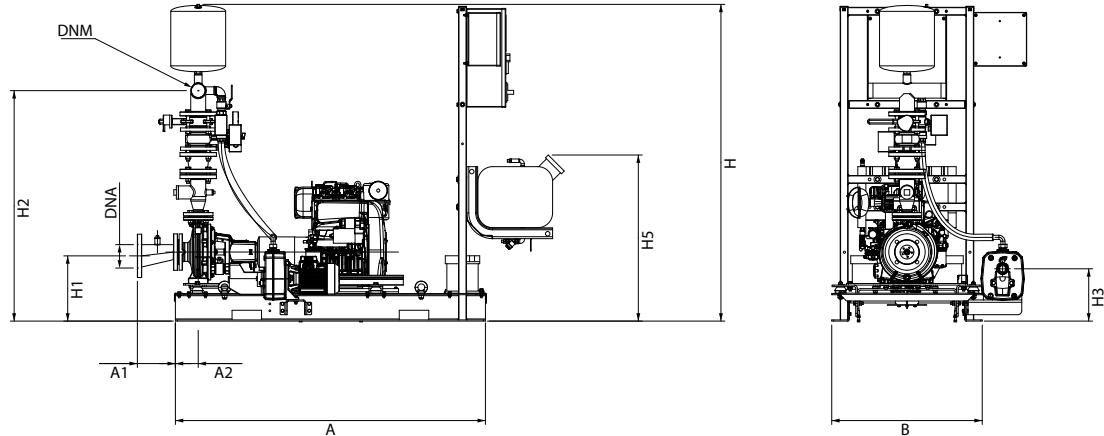


ELECTRIC PUMP MODULE

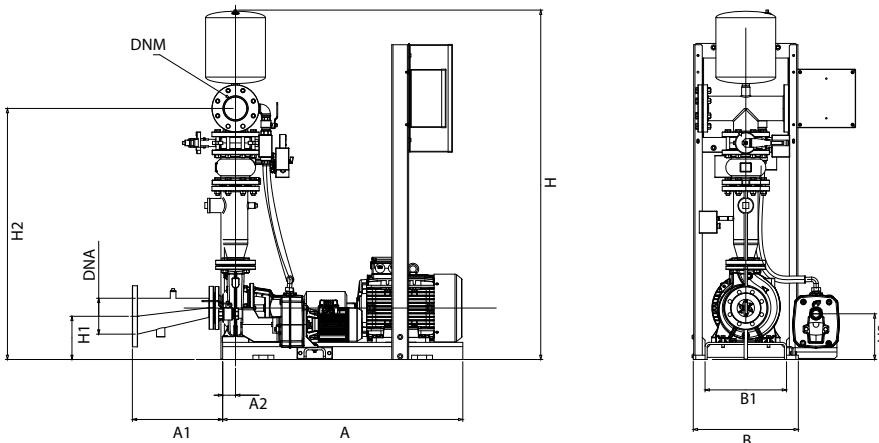

The dashed components are not included in the standard supply.

1 KDN 50-250/230 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

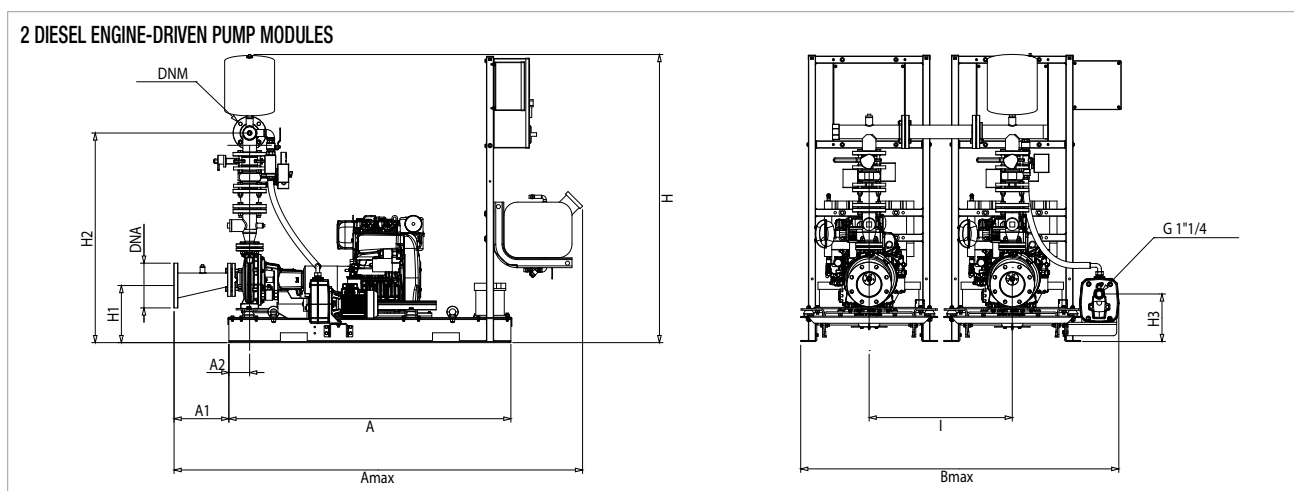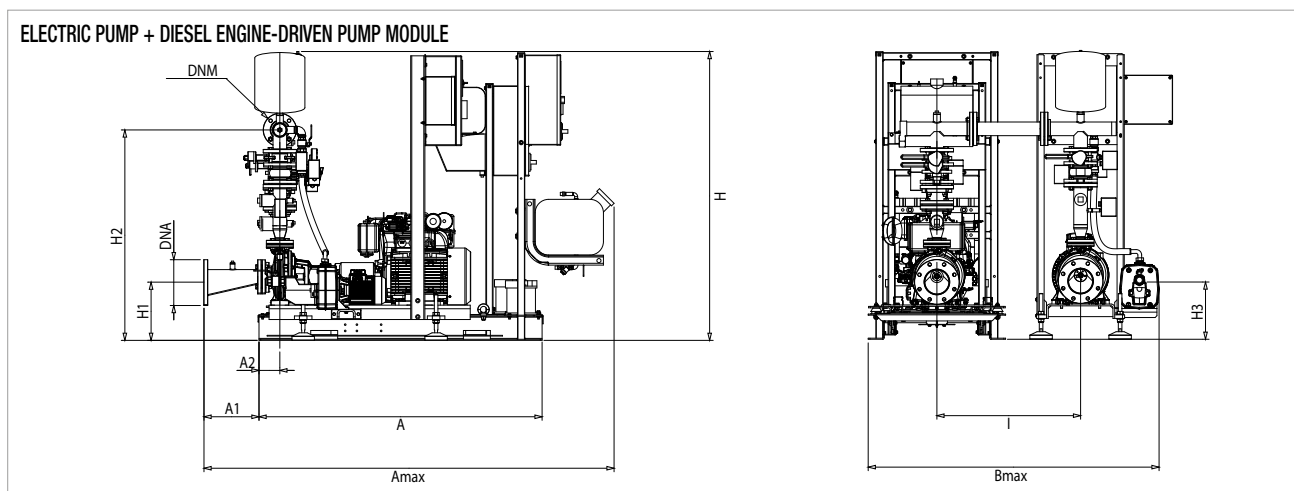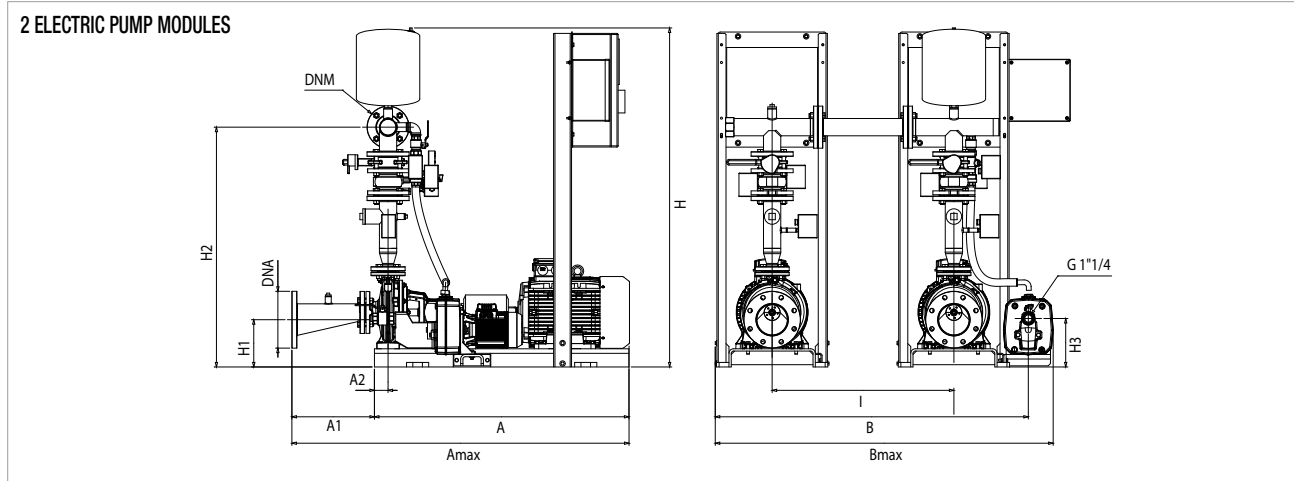


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 50-250/230 - DIESEL ENGINE DRIVEN PUMP MODULE	1576	306	117	2284	765	-	991	1816	339	1376	266	-	844	-	DN 125	DN 80	631	651
1 KDN 50-250/230 - ELECTRIC PUMP MODULE	1250	348	75	1598	490	430	812	1705	228	1265	213	-	-	-	DN 125	DN 80	601	626
1 KDN 50-250/230 - 2 ELECTRIC PUMP MODULES	1250	348	75	1598	1380	-	1702	1705	228	1265	213	-	-	800	DN 125	DN 80	1202	1227
1 KDN 50-250/230 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1576	306	117	2284	-	-	2156	1816	339	1376	266	-	844	800	DN 125	DN 80	1232	1257
1 KDN 50-250/230 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1576	306	117	2284	-	-	2156	1816	339	1376	266	-	844	800	DN 125	DN 80	1262	1282

1 KDN 50-250/250 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

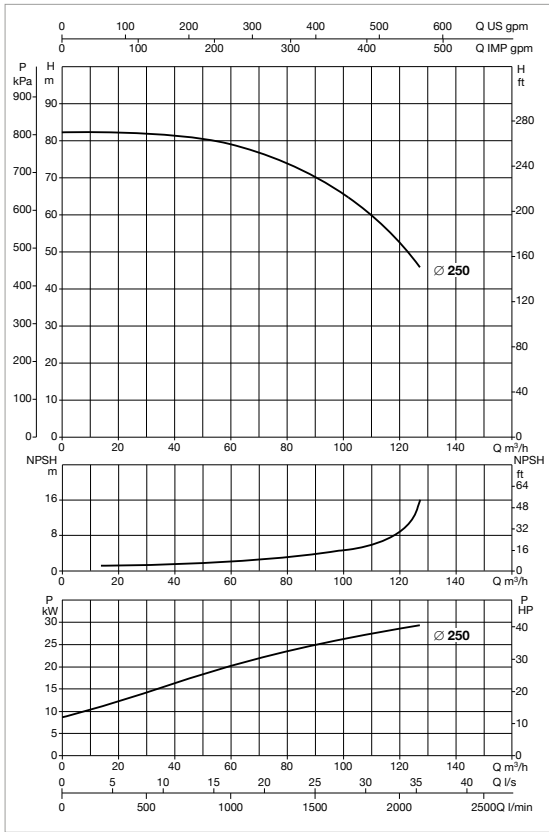

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 50-250/250 30	3 x 400 V ~	JET 251 T	30	1,85	52	KDN 50 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 50-250/250 MD	3 x 230 / 400 V ~	JET 251 T	37	1,85	KDN 50 EN 12845	0,40 m ²

* Jockey pump on request.


** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE

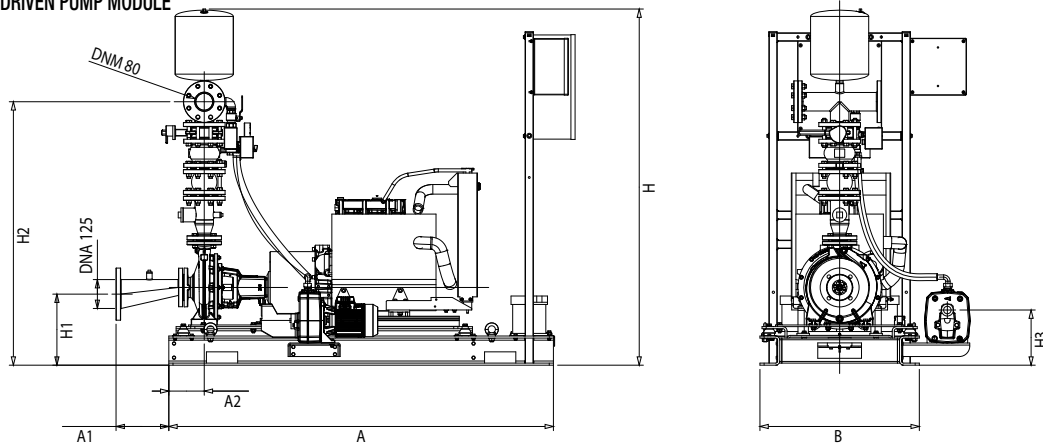


ELECTRIC PUMP MODULE

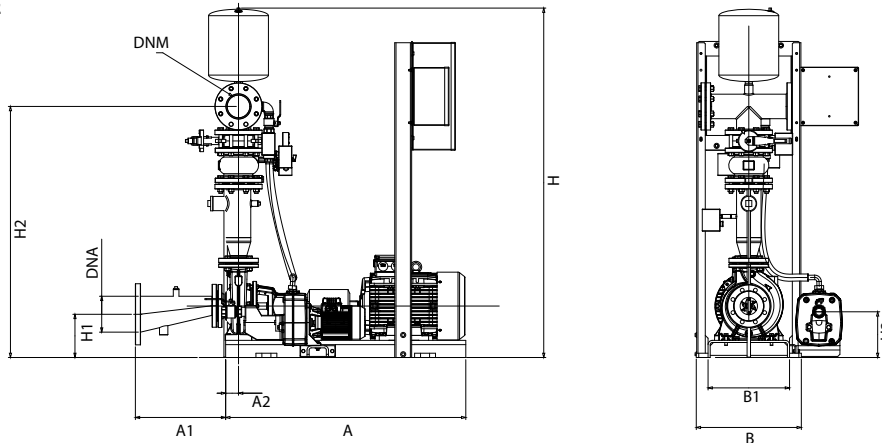


The dashed components are not included in the standard supply.

1 KDN 50-250/250 - UNI EN 12845 FIRE FIGHTING PUMPS SETS


2 ELECTRIC PUMP MODULES

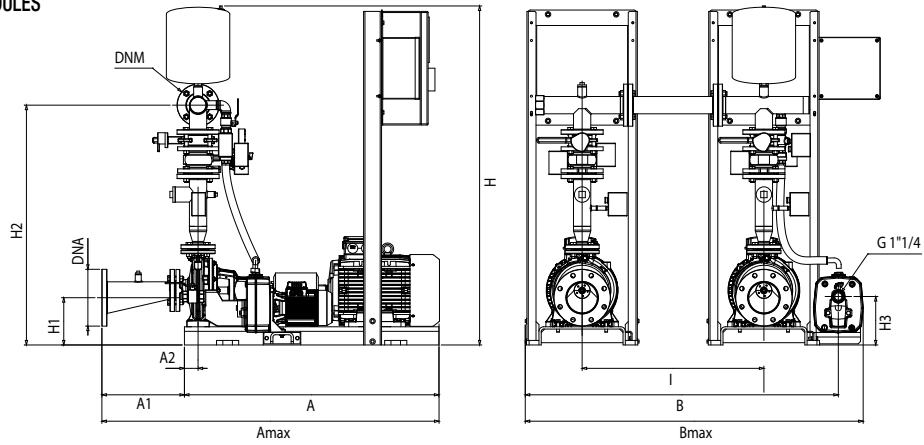

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP MODULE

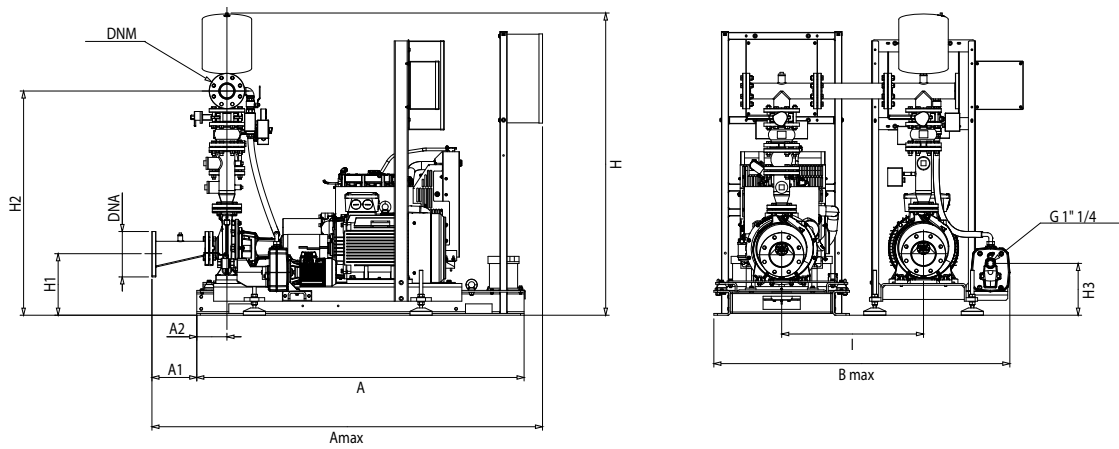

2 DIESEL ENGINE-DRIVEN PUMP MODULES

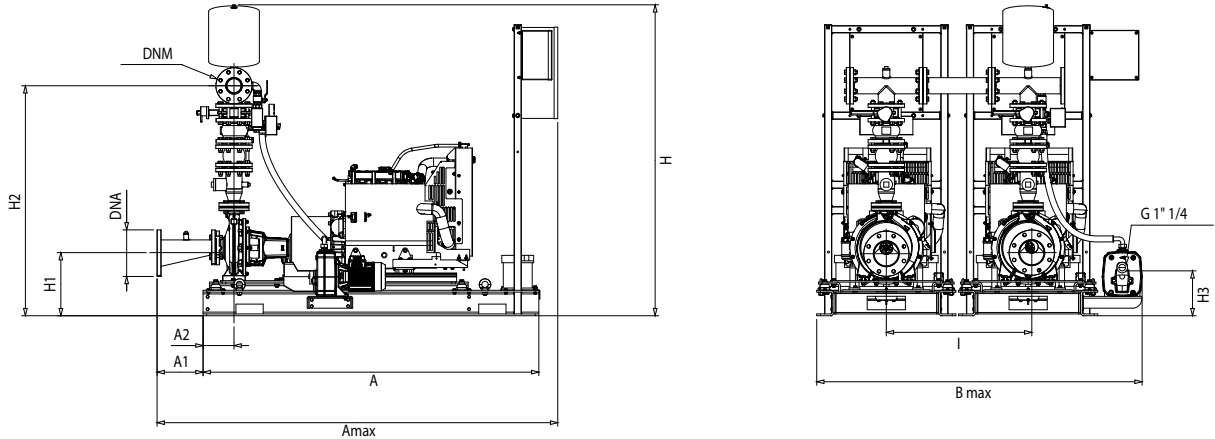


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 50-250/250 - DIESEL ENGINE DRIVEN PUMP MODULE	1846	253	170	2284	765	-	1007	1829	341	1384	265	-	-	-	DN 125	DN 80	804	829
1 KDN 50-250/250 - ELECTRIC PUMP MODULE	1325	348	75	1748	590	480	862	1745	266	1305	213	-	-	-	DN 125	DN 80	661	686
1 KDN 50-250/250 - 2 ELECTRIC PUMP MODULES	1325	348	75	1748	1580	-	1852	1745	266	1305	213	-	-	800	DN 125	DN 80	1322	1347
1 KDN 50-250/250 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1846	253	170	2284	-	-	2172	1829	341	1384	265	-	-	800	DN 125	DN 80	1465	1490
1 KDN 50-250/250 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1846	253	170	2284	-	-	2172	1829	341	1384	265	-	-	800	DN 125	DN 80	1608	1633

1 KDN 50-250/263 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

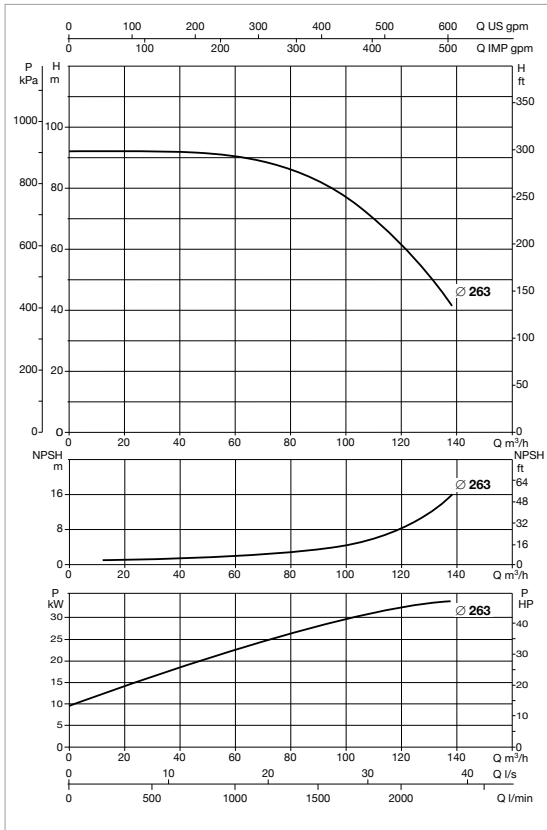

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 50-250/263 37	3 x 400 V ~	KV 3/12 T	37	1,5	63	KDN 50 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP



MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 50-250/263 MD	3 x 230 / 400 V ~	KV 3/12 T	37	1,5	KDN 50 EN 12845	0,40 m²

* Jockey pump on request.



** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE

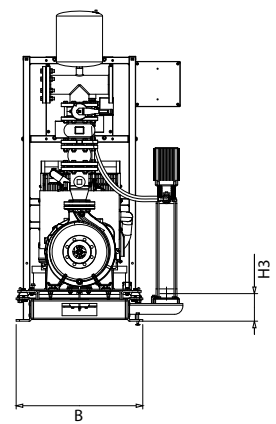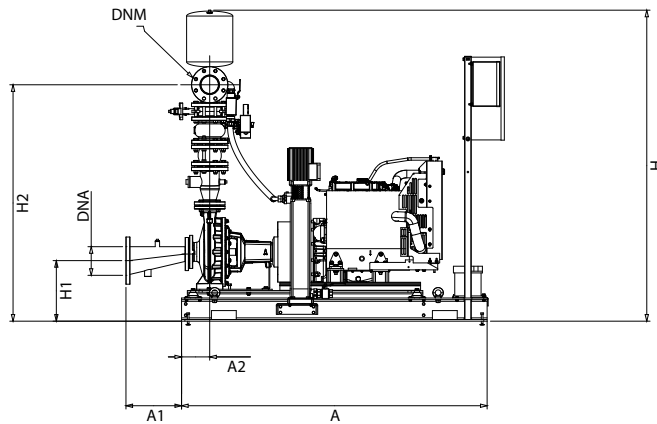


ELECTRIC PUMP MODULE

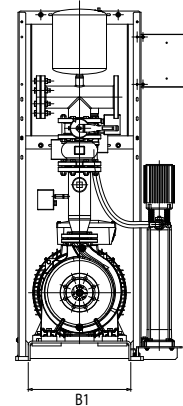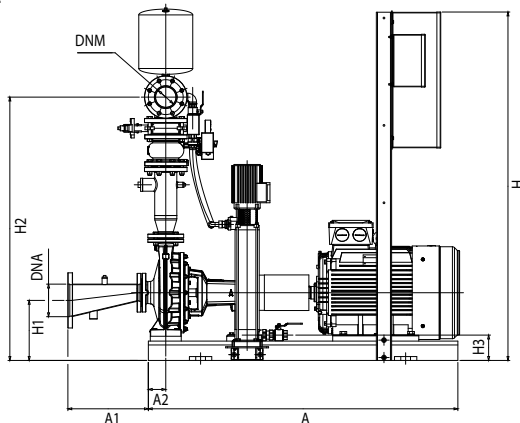


The dashed components are not included in the standard supply.

1 KDN 50-250/263 - UNI EN 12845 FIRE FIGHTING PUMPS SETS


2 ELECTRIC PUMP MODULES

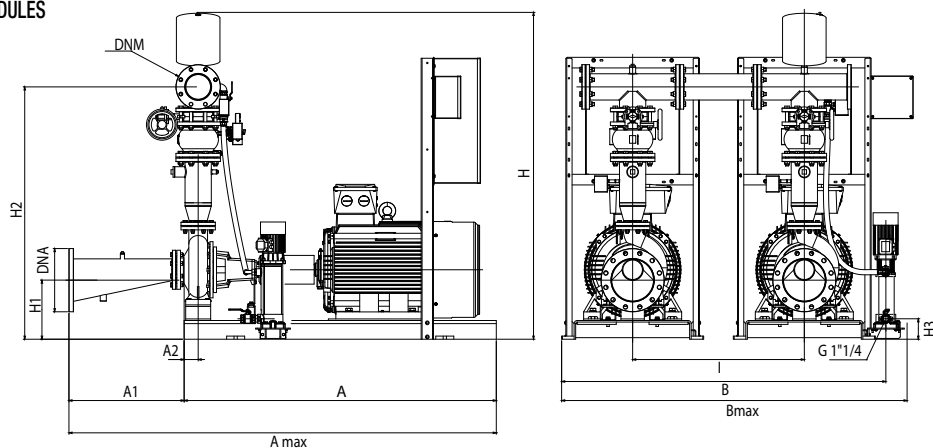

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP MODULE

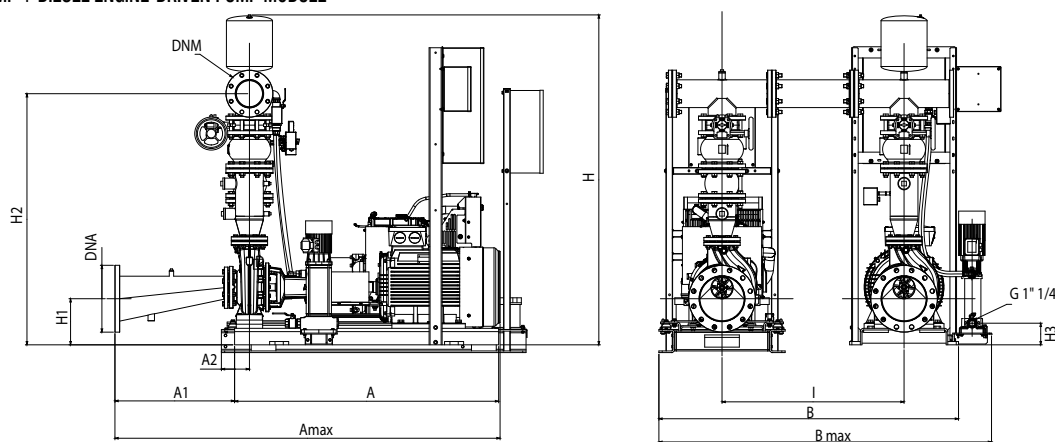

2 DIESEL ENGINE-DRIVEN PUMP MODULES

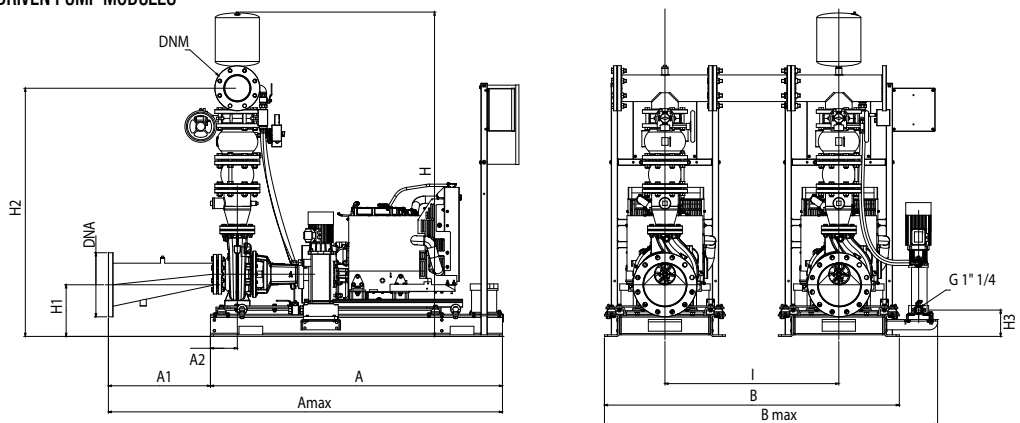


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 50-250/263 - DIESEL ENGINE DRIVEN PUMP MODULE	1846	253	170	2284	765	-	1007	1829	341	1384	265	-	-	-	DN 125	DN 80	809	818
1 KDN 50-250/263 - ELECTRIC PUMP MODULE	1325	348	75	1748	590	480	862	1745	266	1305	213	-	-	-	DN 125	DN 80	911	939
1 KDN 50-250/263 - 2 ELECTRIC PUMP MODULES	1325	348	75	1748	1580	-	1852	1745	266	1305	213	-	-	800	DN 125	DN 80	1822	1850
1 KDN 50-250/263 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1846	253	170	2284	-	-	2172	1829	341	1384	265	-	-	800	DN 125	DN 80	1720	1748
1 KDN 50-250/263 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1846	253	170	2284	-	-	2172	1829	341	1384	265	-	-	800	DN 125	DN 80	1618	1627

1 KDN 65-160/153 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

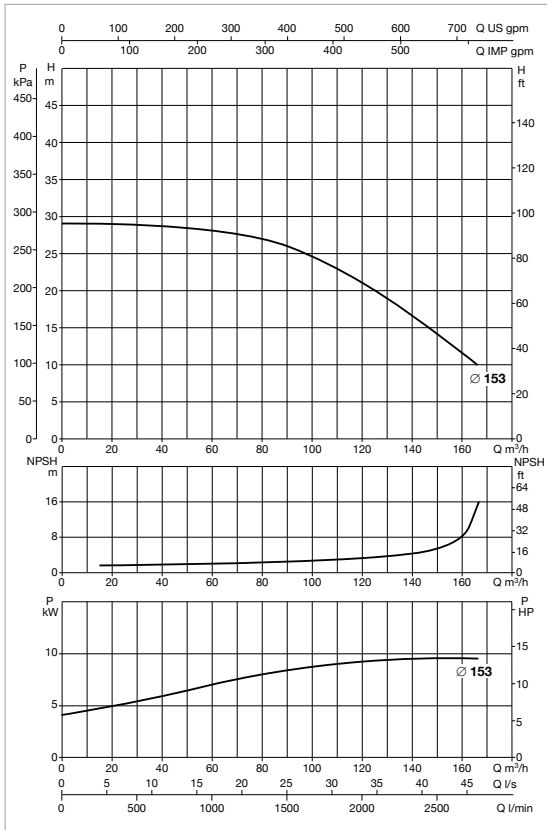

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 65-160/153 11	3 x 400 V ~	JET 251 T	11	1,85	19,4	KDN 65 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 65-160/153 MD	3 x 230 / 400 V ~	JET 251 T	11	1,85	KDN 65 EN 12845	0,22 m²

* Jockey pump on request.


** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE



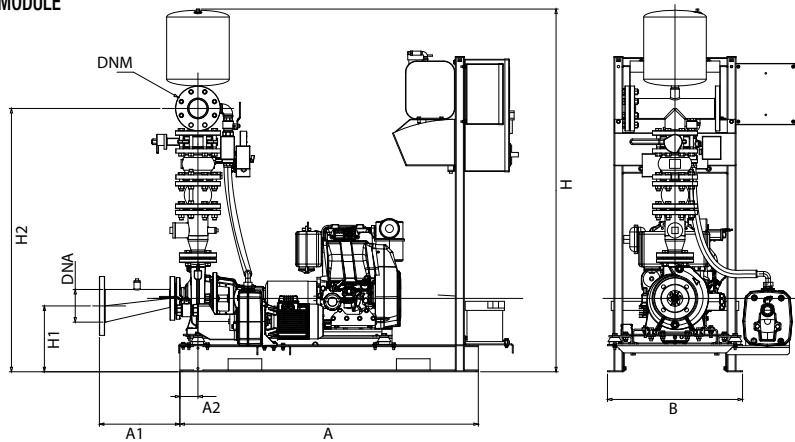


ELECTRIC PUMP MODULE

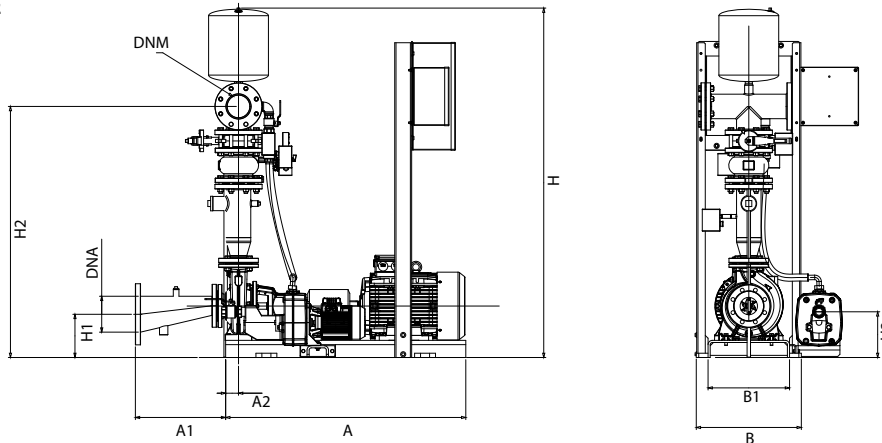

The dashed components are not included in the standard supply.

1 KDN 65-160/153 - UNI EN 12845 FIRE FIGHTING PUMPS SETSS

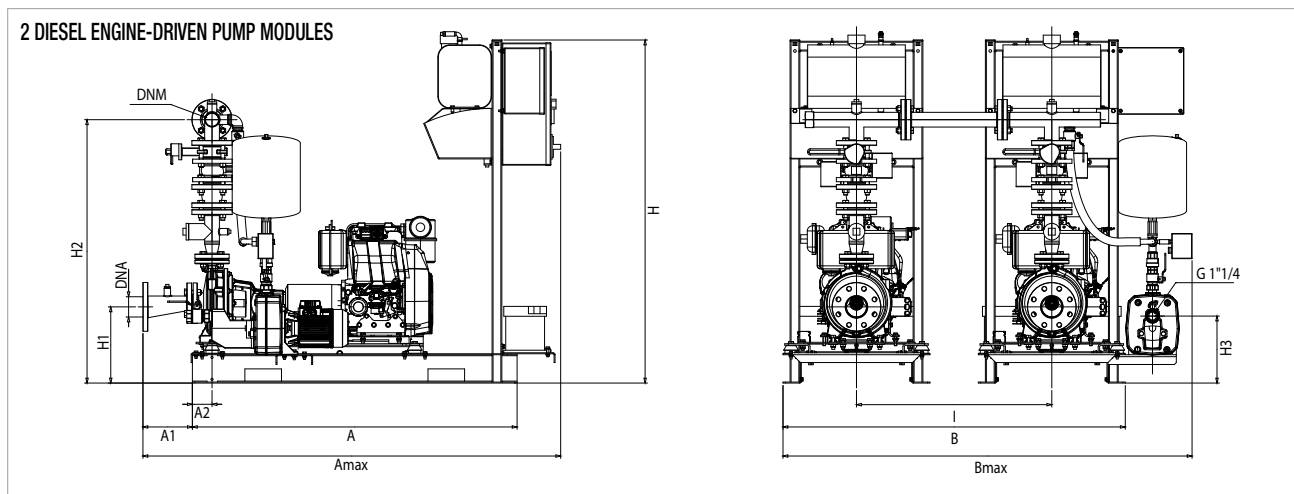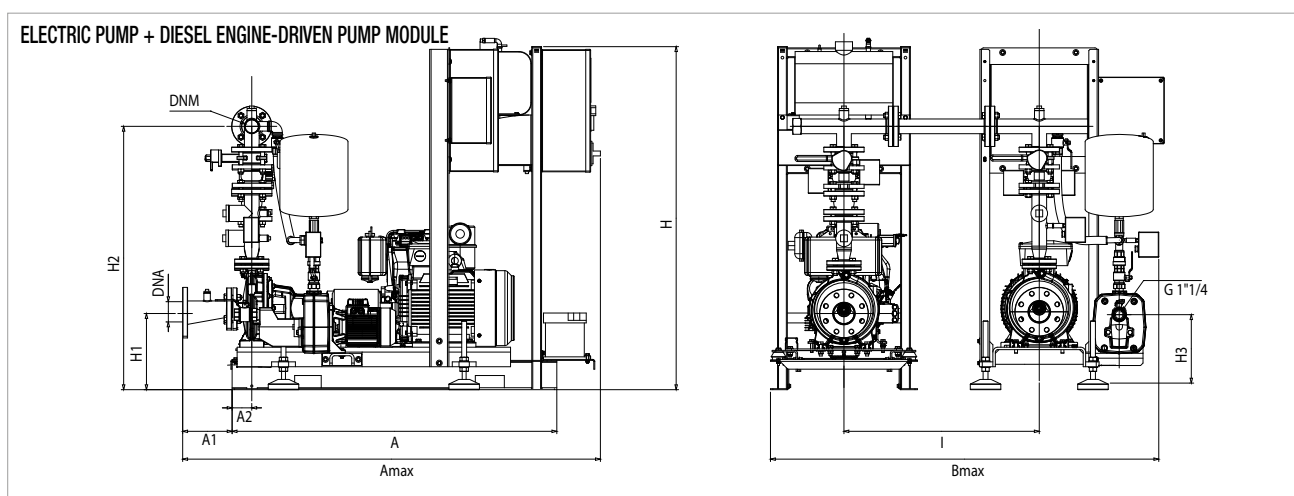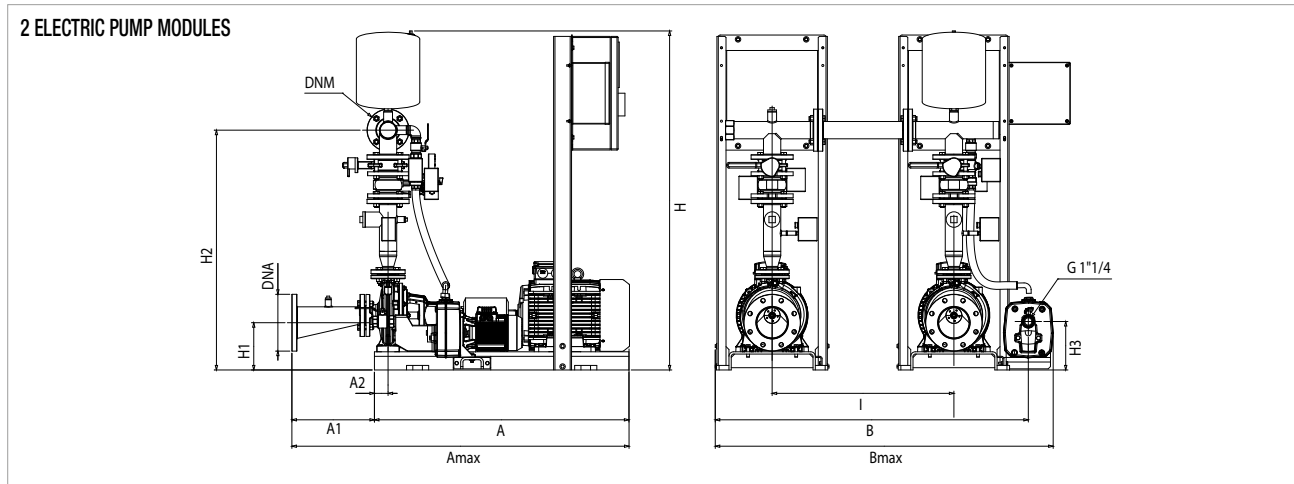


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 65-160/153 - DIESEL ENGINE DRIVEN PUMP MODULE	1330	400	81	1901	602	-	841	1847	290	1391	274	-	-	-	DN 150	DN 100	376	399
1 KDN 65-160/153 - ELECTRIC PUMP MODULE	1120	421	60	1543	490	380	762	1760	202	1301	213	-	-	-	DN 150	DN 100	487	510
1 KDN 65-160/153 - 2 ELECTRIC PUMP MODULES	1120	421	60	1543	1480	-	1752	1760	202	1301	213	-	-	800	DN 150	DN 100	974	997
1 KDN 65-160/153 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1330	400	81	1901	1704	-	1943	1847	290	1391	274	-	-	800	DN 150	DN 100	863	886
1 KDN 65-160/153 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1330	400	81	1901	1704	-	1943	1847	290	1391	274	-	-	800	DN 150	DN 100	752	775

1 KDN 65-200/190 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

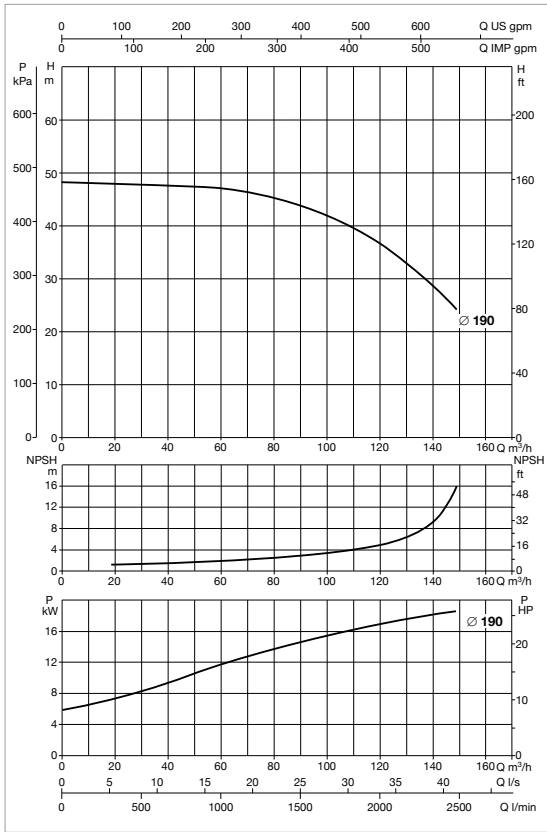

KDN UNI EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 65-200/190 18,5	3 x 400 V ~	JET 251 T	18,5	1,85	32	KDN 65 EN 12845

KDN UNI EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 65-200/190 MD	3 x 230 / 400 V ~	JET 251 T	19	1,85	KDN 65 EN 12845	0,22 m²

* Jockey pump on request.


** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE

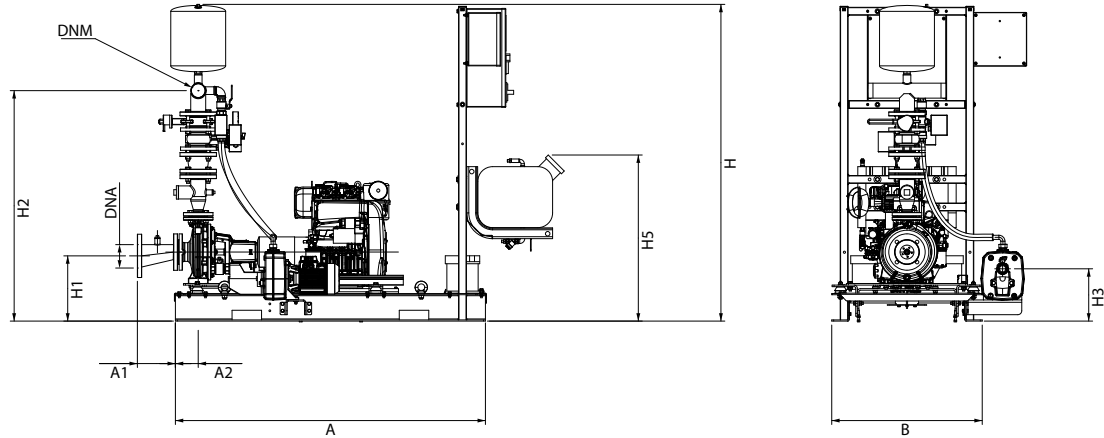


ELECTRIC PUMP MODULE

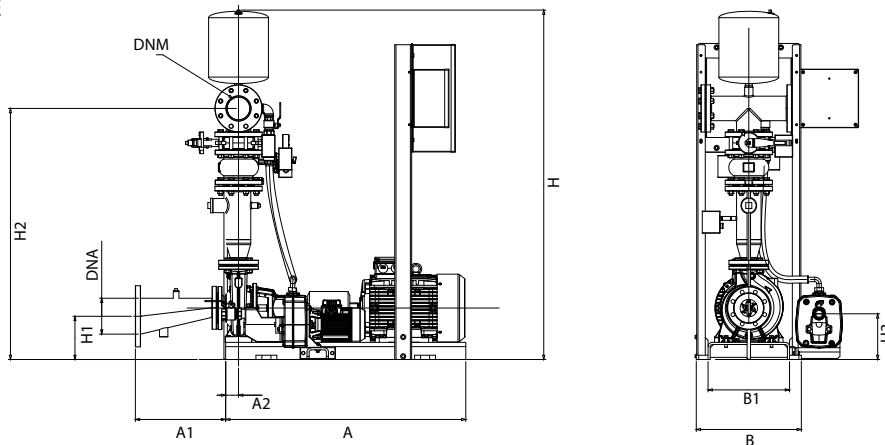


The dashed components are not included in the standard supply.

1 KDN 65-200/190 - UNI EN 12845 FIRE FIGHTING PUMPS SETS


2 ELECTRIC PUMP MODULES

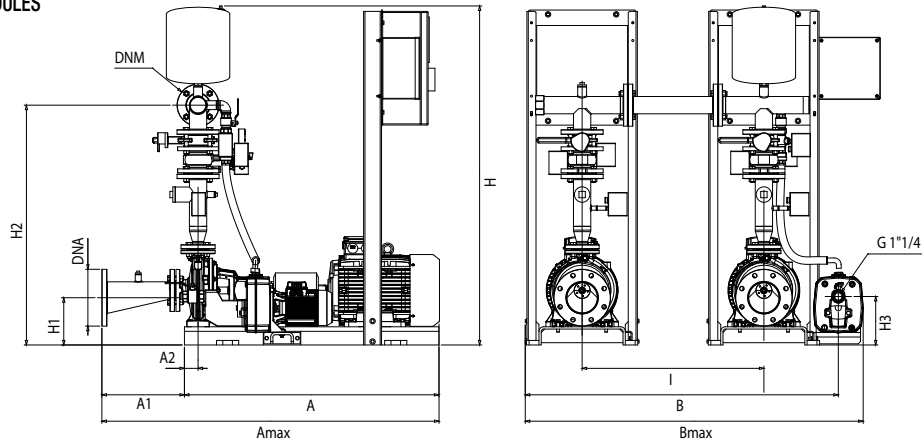

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP MODULE

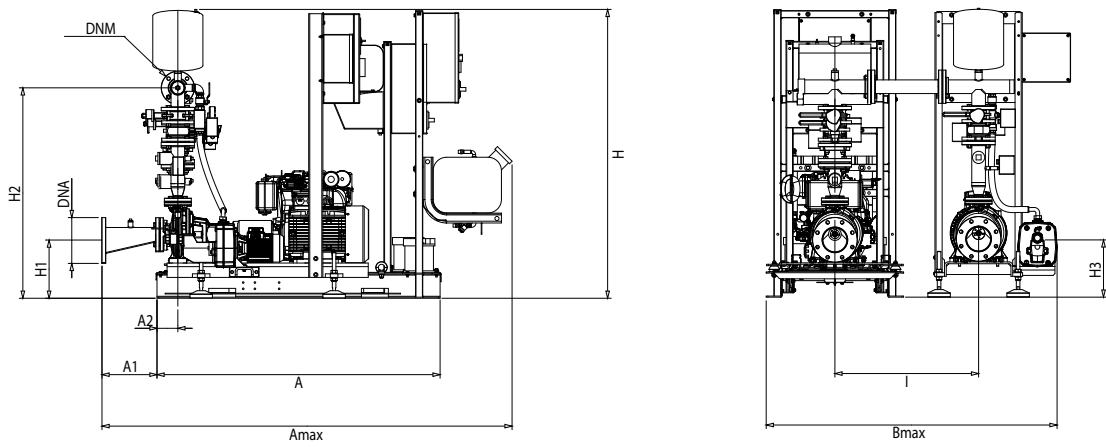

2 DIESEL ENGINE-DRIVEN PUMP MODULES

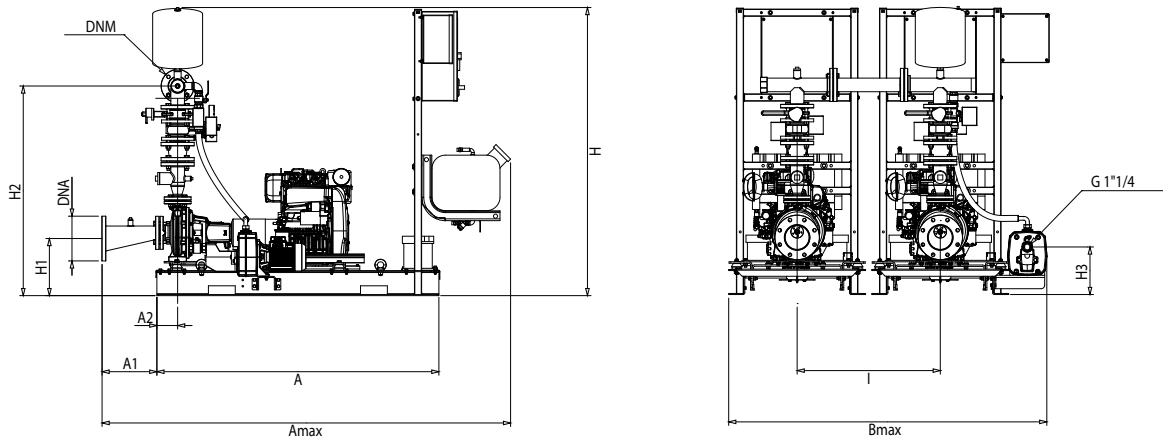


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 65-200/190 - MODULO MOTOPOMPA DIESEL	1576	365	117	2342	765	-	991	1912	331	1456	266	-	844	-	DN 150	DN 100	585	606
1 KDN 65-200/190 - MODULO ELETTROPOMPA	1175	481	75	1601	540	430	812	1802	220	1230	213	-	-	-	DN 150	DN 100	615	635
1 KDN 65-200/190 - 2 MODULI ELETTROPOMPA	1175	481	75	1601	1580	-	1852	1802	220	1230	213	-	-	800	DN 150	DN 100	1230	1250
1 KDN 65-200/190 - MODULO ELETTROPOMPA + MOTOPOMPA DIESEL	1576	365	117	2342	-	-	2256	1912	331	1456	266	-	844	800	DN 150	DN 100	1200	1220
1 KDN 65-200/190 - 2 MODULI MOTOPOMPA DIESEL	1576	365	117	2342	-	-	2256	1912	331	1456	266	-	844	800	DN 150	DN 100	1170	1191

1 KDN 65-200/200 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

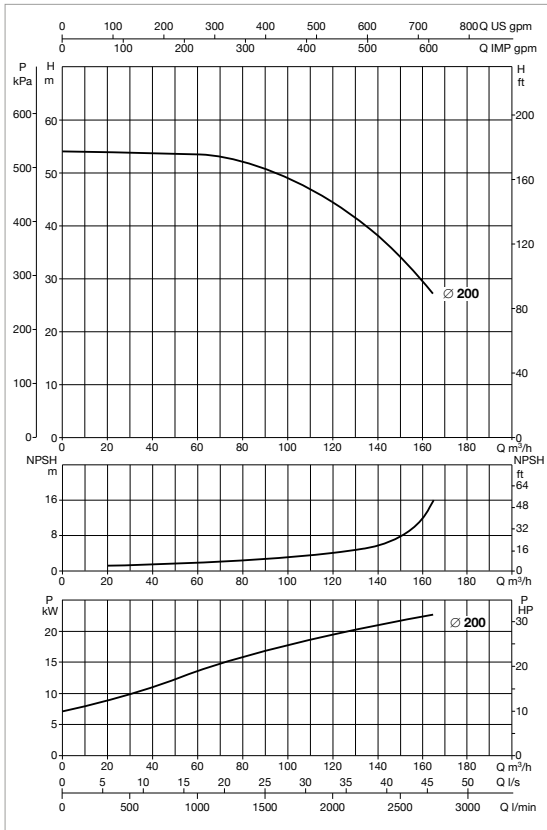

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 65-200/200 22	3 x 400 V ~	JET 251 T	22	1,85	38	KDN 65 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 65-200/200 MD	3 x 230 / 400 V ~	JET 251 T	26	1,85	KDN 65 EN 12845	0,22 m²

* Jockey pump on request.


** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE



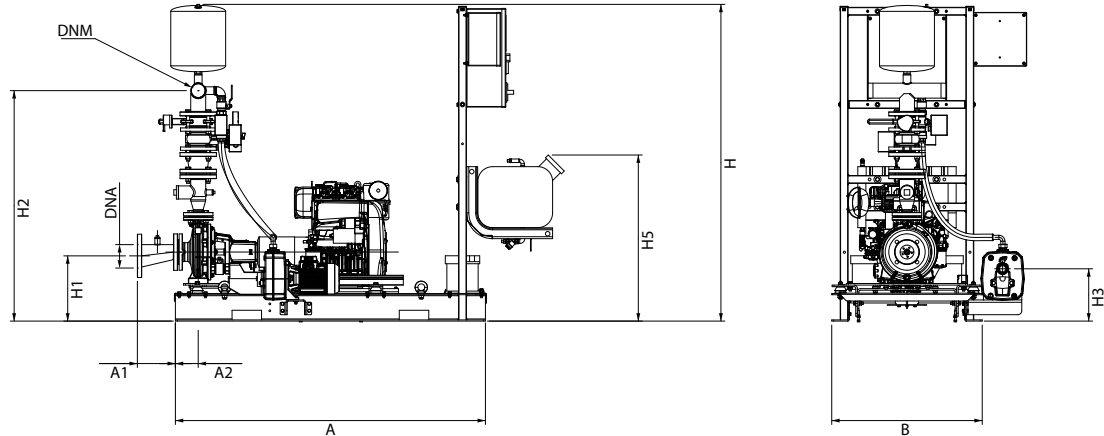


ELECTRIC PUMP MODULE

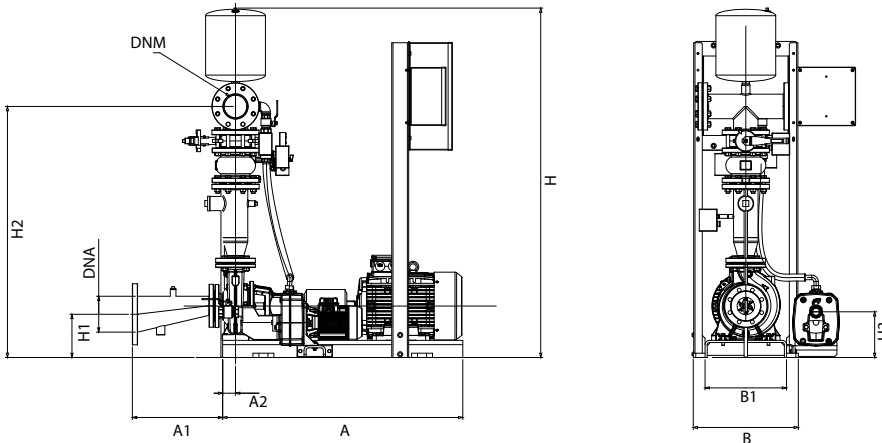

The dashed components are not included in the standard supply.

1 KDN 65-200/200 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

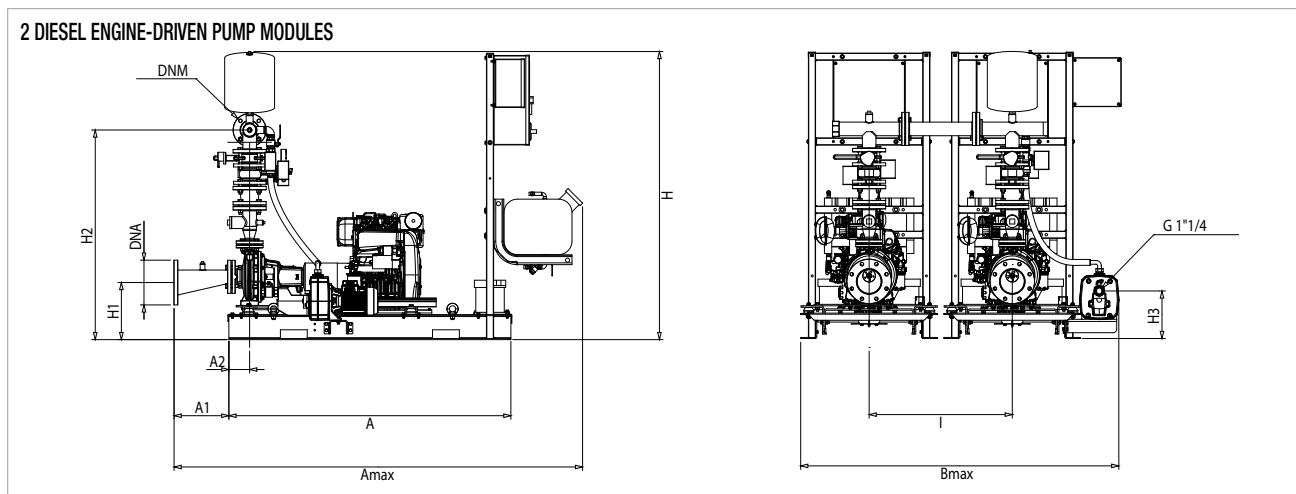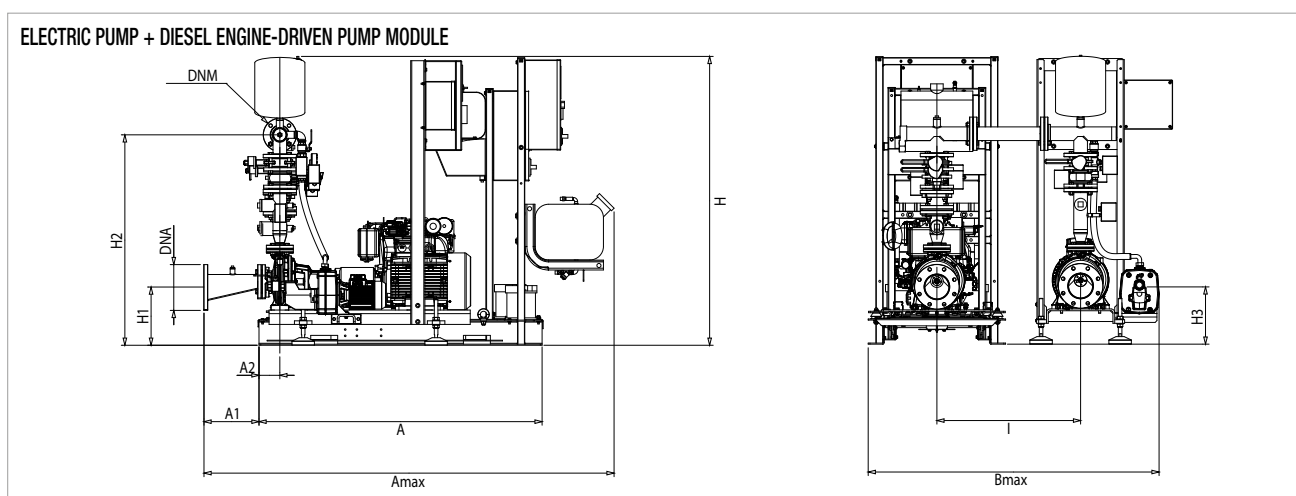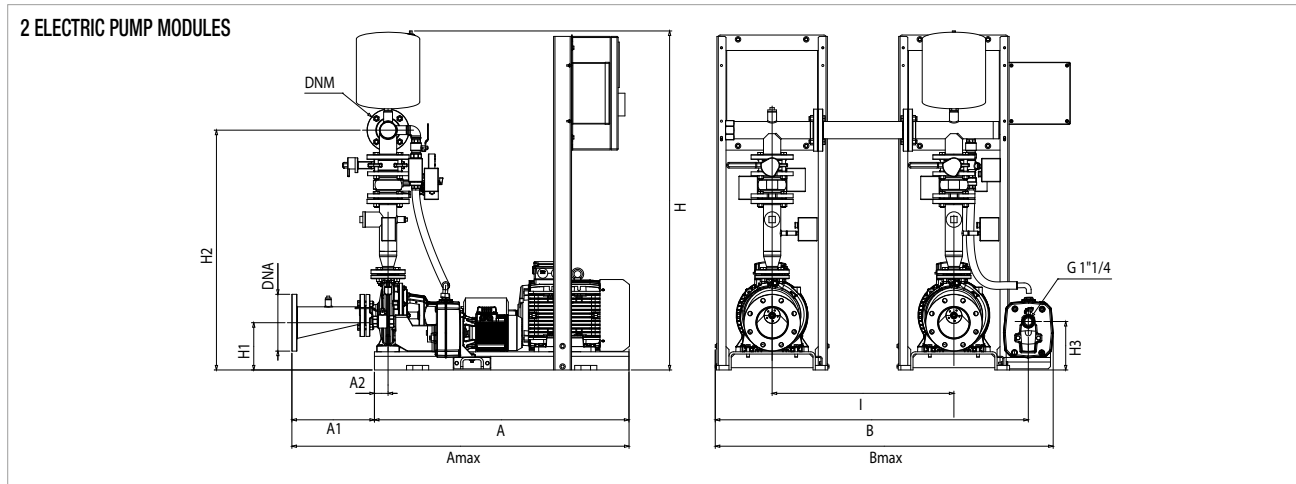


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 65-200/200 - DIESEL ENGINE DRIVEN PUMP MODULE	1576	365	117	2342	765	-	991	1912	330	1456	266	-	844	-	DN 150	DN 100	646	664
1 KDN 65-200/200 - ELECTRIC PUMP MODULE	1260	406	75	1665	540	430	812	1802	220	1343	213	-	-	-	DN 150	DN 100	637	657
1 KDN 65-200/200 - 2 ELECTRIC PUMP MODULES	1260	406	75	1665	1580	-	1852	1802	220	1343	213	-	-	800	DN 150	DN 100	1274	1294
1 KDN 65-200/200 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1576	365	117	2342	-	-	2256	1912	330	1456	266	-	844	800	DN 150	DN 100	1283	1303
1 KDN 65-200/200 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1576	365	117	2342	-	-	2256	1912	330	1456	266	-	844	800	DN 150	DN 100	1292	1310

1 KDN 65-250/230 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

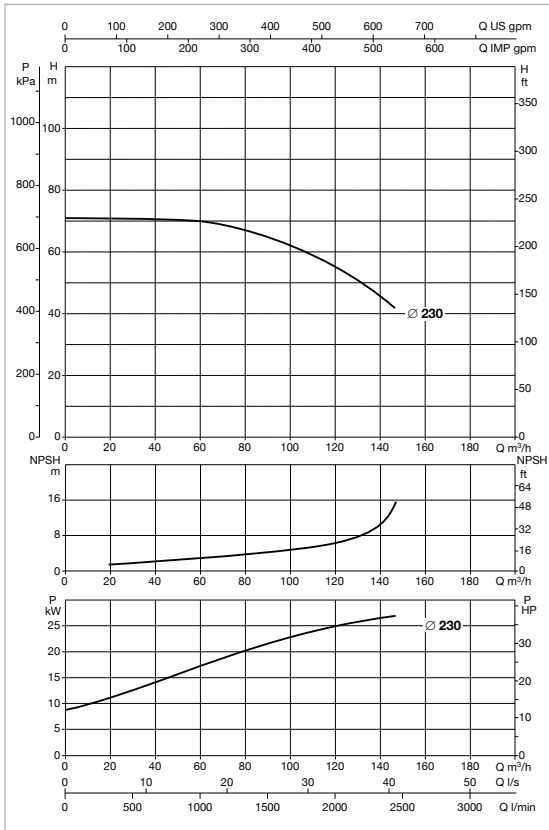

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 65-250/230 30	3 x 400 V ~	JET 251 T	30	1,85	52	KDN 65 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 65-250/230 MD	3 x 230 / 400 V ~	JET 251 T	26	1,85	KDN 65 EN 12845	0,22 m²

* Jockey pump on request.


** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE



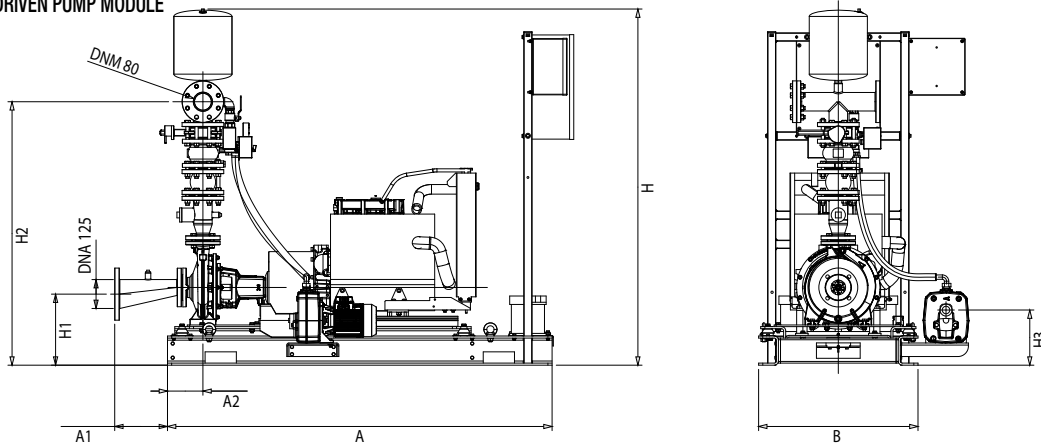


ELECTRIC PUMP MODULE

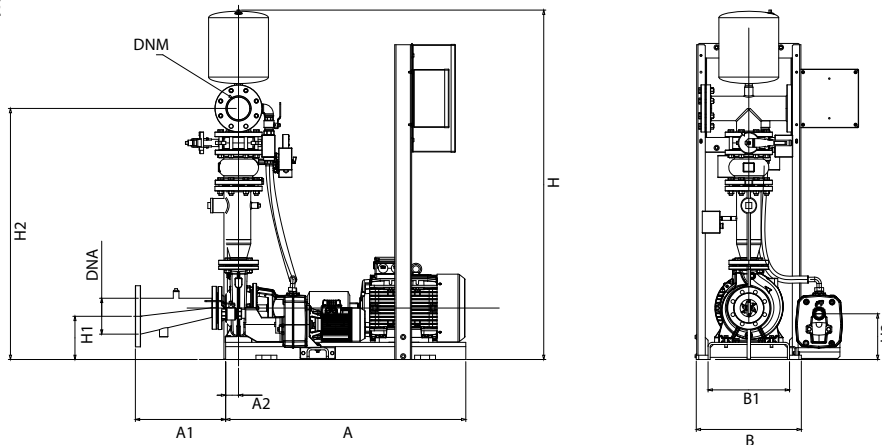

The dashed components are not included in the standard supply.

1 KDN 65-250/230 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

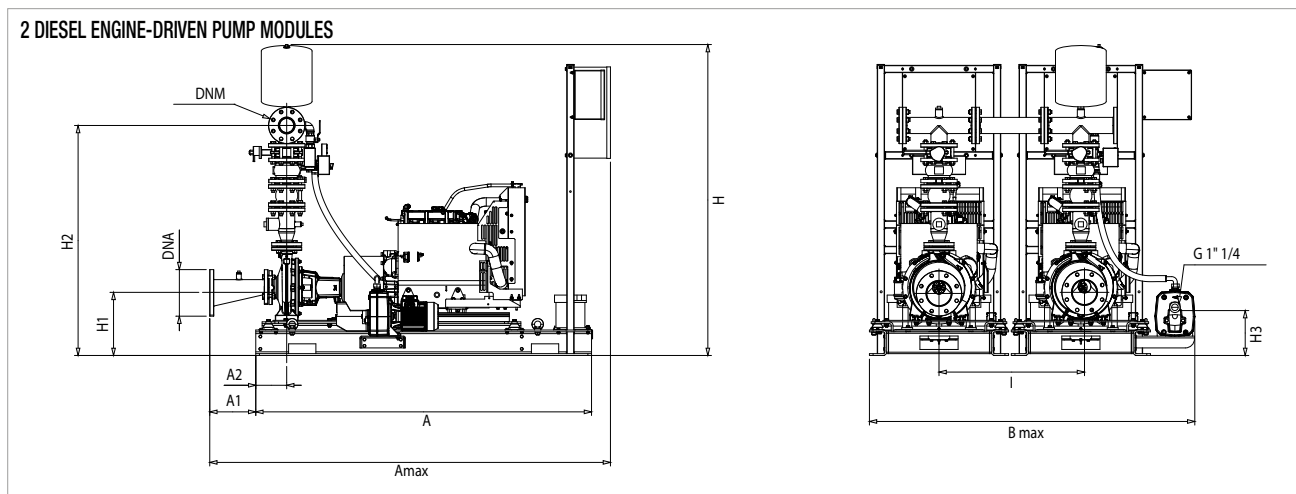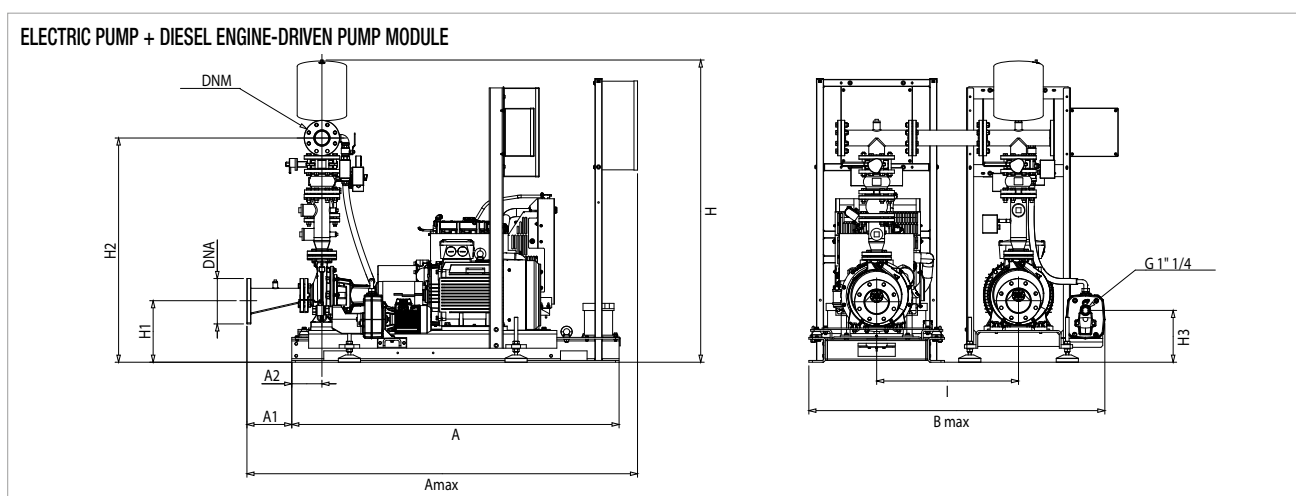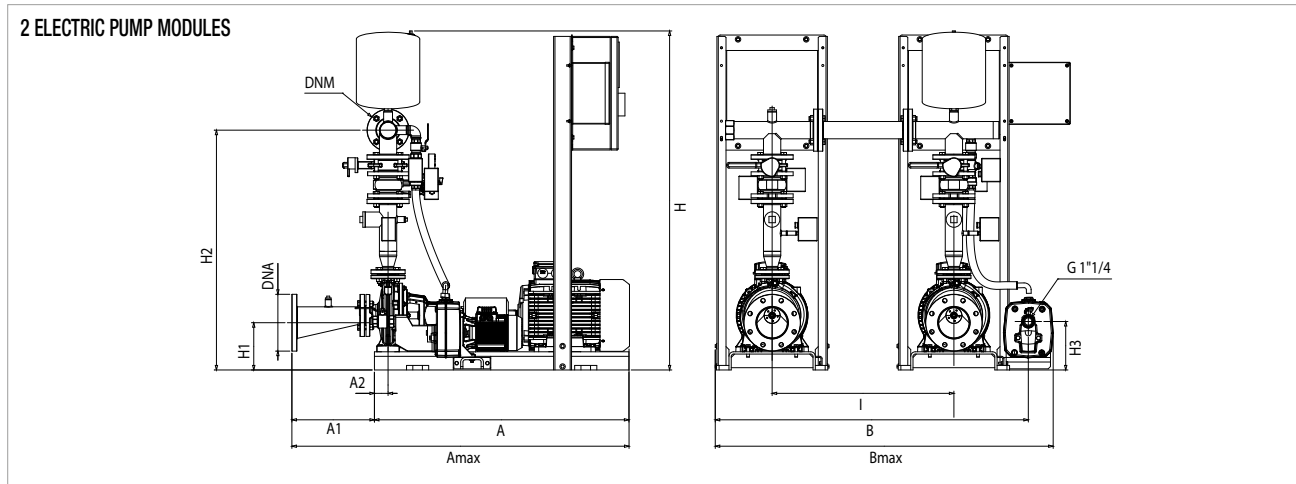


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 65-250/230 - DIESEL ENGINE DRIVEN PUMP MODULE	1846	311	170	2558	765	-	1033	1954	353	1502	266	-	844	-	DN 150	DN 100	734	754
1 KDN 65-250/230 - ELECTRIC PUMP MODULE	1400	391	90	1860	590	480	862	1867	260	1408	213	-	-	-	DN 150	DN 100	720	740
1 KDN 65-250/230 - 2 ELECTRIC PUMP MODULES	1400	391	90	1860	1680	-	1952	1867	260	1408	213	-	-	900	DN 150	DN 100	1440	1460
1 KDN 65-250/230 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1846	311	170	2558	-	-	2298	1954	353	1502	266	-	844	900	DN 150	DN 100	1454	1474
1 KDN 65-250/230 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1846	311	170	2558	-	-	2298	1954	353	1502	266	-	844	900	DN 150	DN 100	1468	1488

1 KDN 65-250/250 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

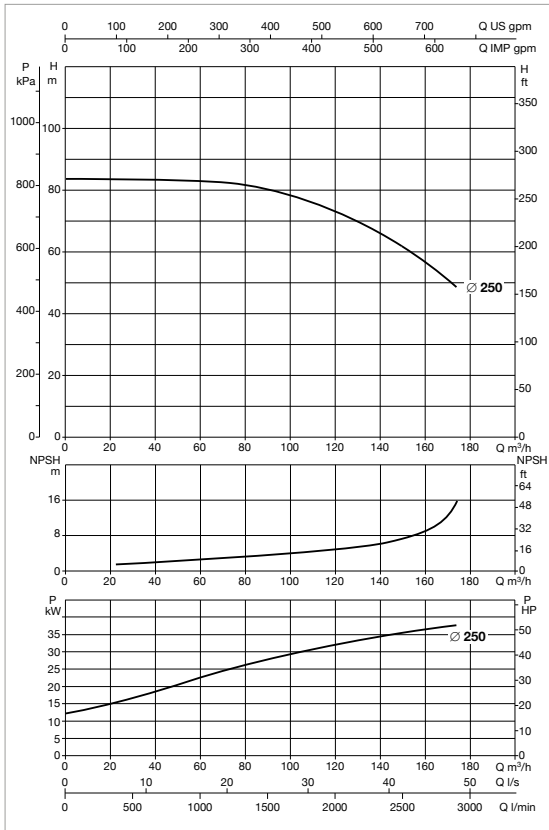

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 65-250/250 37	3 x 400 V ~	KVCX 65/80 T	37	2,2	63	KDN 65 EN 12845



KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP

MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 65-250/250 MD	3 x 230 / 400 V ~	KVCX 65/80 T	37	2,2	KDN 65 EN 12845	0,40 m²

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

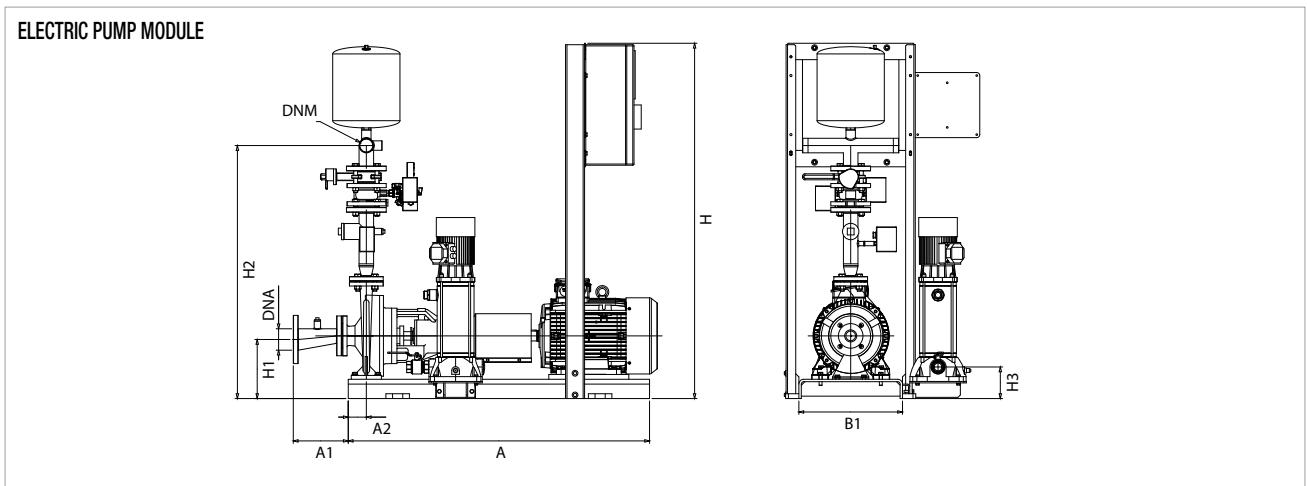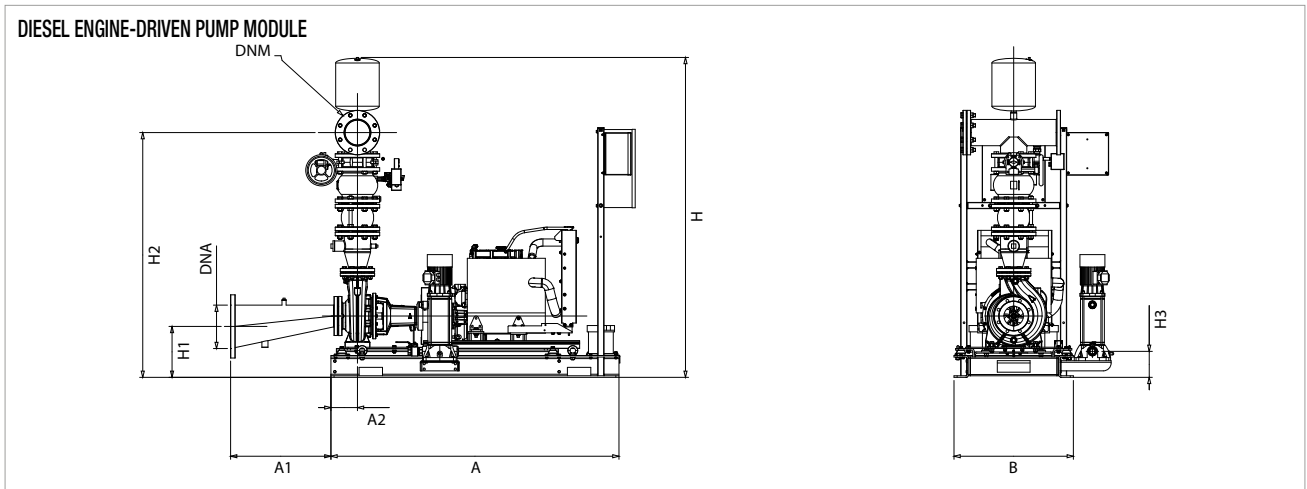


The dashed components are not included in the standard supply.

1 KDN 65-250/250 - UNI EN 12845 FIRE FIGHTING PUMPS SETS


2 ELECTRIC PUMP MODULES

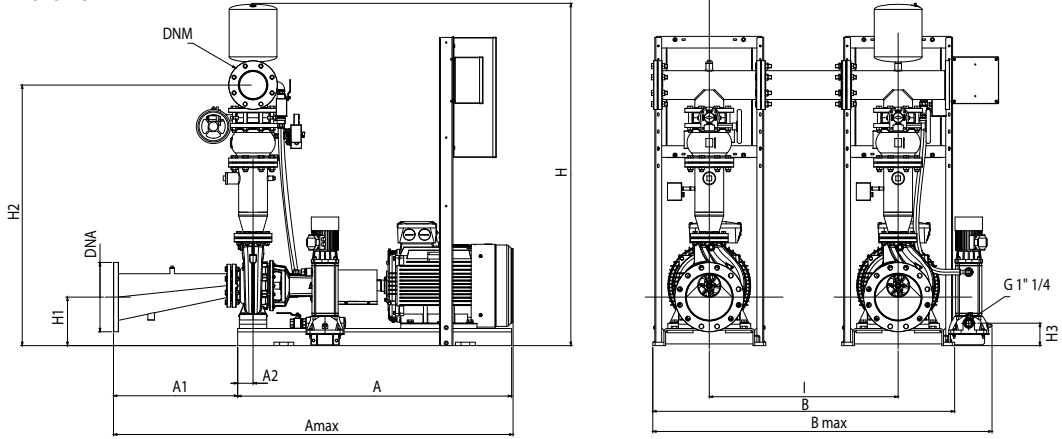

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP MODULE

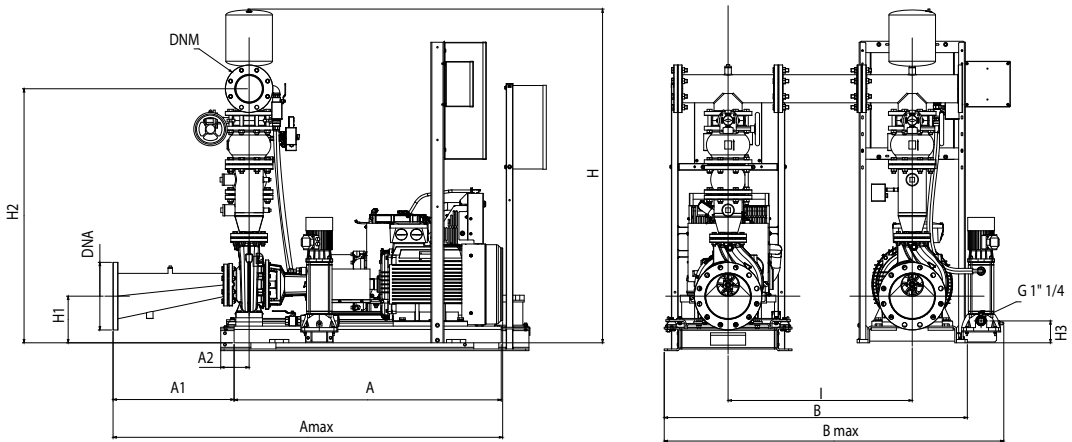

2 DIESEL ENGINE-DRIVEN PUMP MODULES

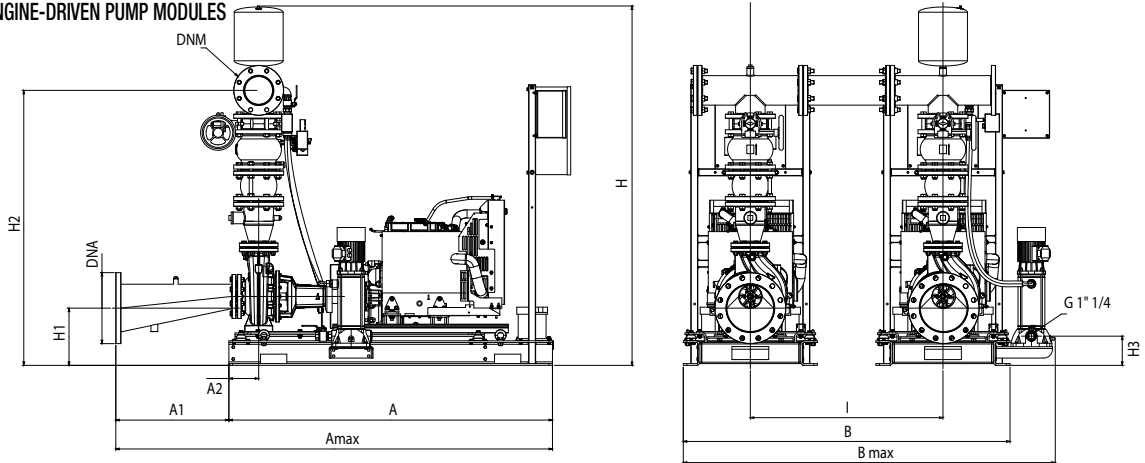


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 65-250/250 - DIESEL ENGINE DRIVEN PUMP MODULE	1846	311	170	2260	765	-	991	1954	353	1502	167	-	-	-	DN 150	DN 100	938	962
1 KDN 65-250/250 - ELECTRIC PUMP MODULE	1325	348	75	1748	590	480	862	1867	266	1408	131	-	-	-	DN 150	DN 100	921	945
1 KDN 65-250/250 - 2 ELECTRIC PUMP MODULES	1325	348	75	1748	1680	-	1952	1867	266	1408	131	-	-	900	DN 150	DN 100	1842	1866
1 KDN 65-250/250 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1846	311	170	2260	-	-	2256	1954	353	1502	167	-	-	900	DN 150	DN 100	1859	1883
1 KDN 65-250/250 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1846	311	170	2260	-	-	2256	1954	353	1502	167	-	-	900	DN 150	DN 100	1876	1900

1 KDN 65-250/263 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

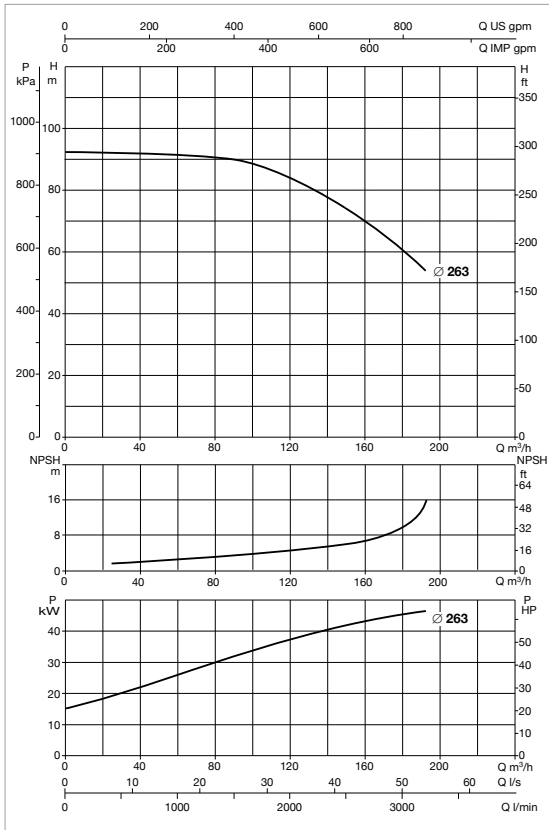

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 65-250/263 45	3 x 400 V ~	KVCX 65/80 T	45	2,2	76	KDN 65 EN 12845



KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP

MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 65-250/263 MD	3 x 230 / 400 V ~	KVCX 65/80 T	53	2,2	KDN 65 EN 12845	0,40 m²

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

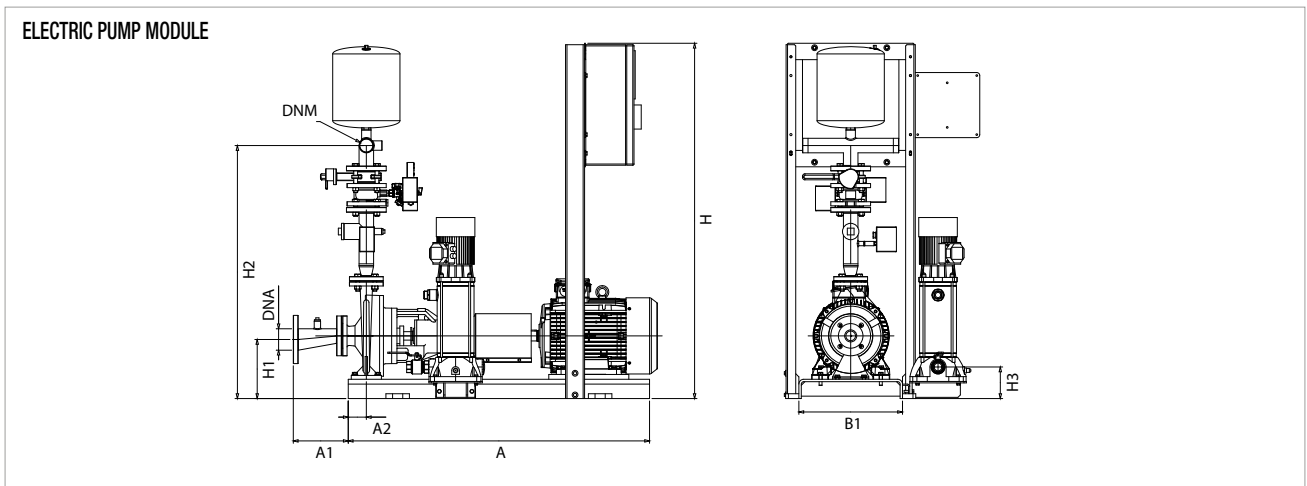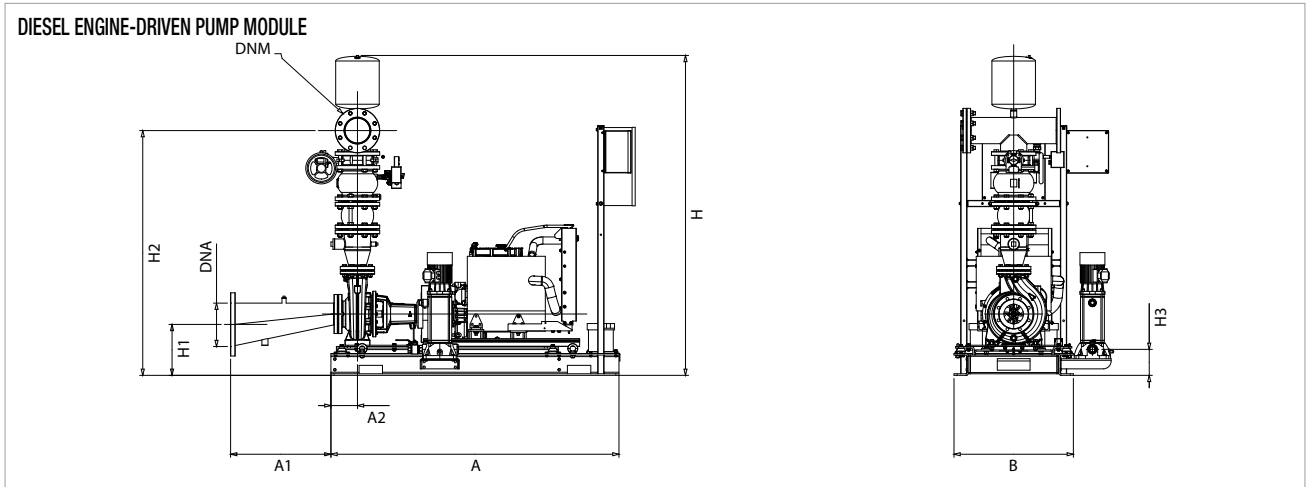



The dashed components are not included in the standard supply.

1 KDN 65-250/263 - UNI EN 12845 FIRE FIGHTING PUMPS SETS



2 ELECTRIC PUMP MODULES

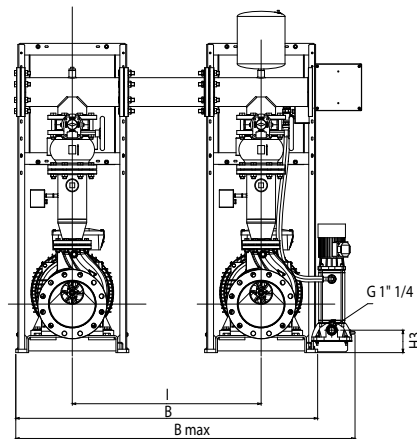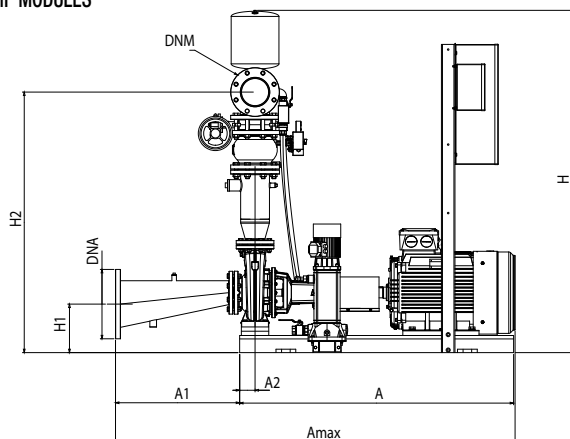

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP MODULE

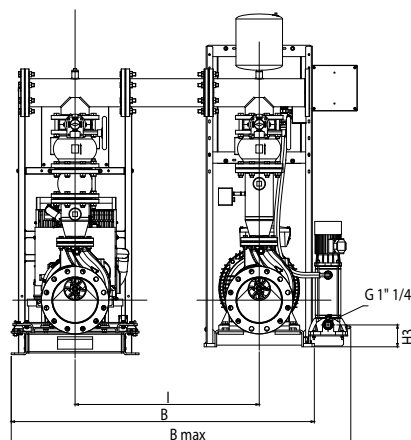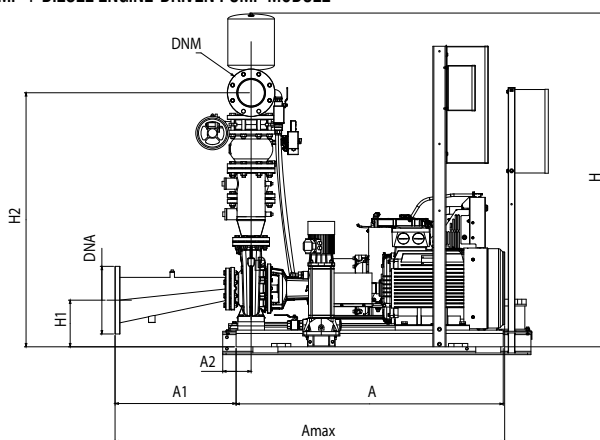

2 DIESEL ENGINE-DRIVEN PUMP MODULES

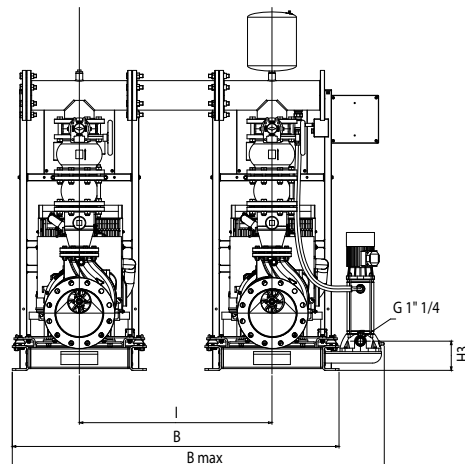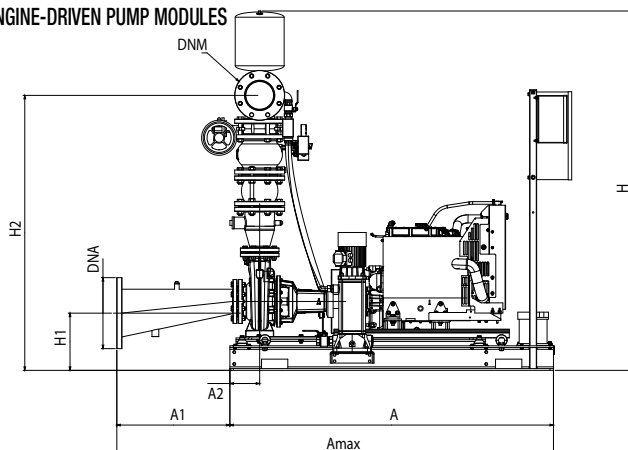


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 65-250/263 - DIESEL ENGINE DRIVEN PUMP MODULE	1846	311	170	2260	765	-	991	1954	353	1503	167	-	-	-	DN 150	DN 100	962	992
1 KDN 65-250/263 - ELECTRIC PUMP MODULE	1517	391	90	1907	590	480	862	1936	285	1433	131	-	-	-	DN 150	DN 100	945	975
1 KDN 65-250/263 - 2 ELECTRIC PUMP MODULES	1517	391	90	1907	1680	-	1952	1936	285	1433	131	-	-	900	DN 150	DN 100	1890	1920
1 KDN 65-250/263 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1846	311	170	2260	-	-	2256	1954	353	1503	167	-	-	900	DN 150	DN 100	1907	1937
1 KDN 65-250/263 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1846	311	170	2260	-	-	2256	1954	353	1503	167	-	-	900	DN 150	DN 100	1924	1954

1 KDN 65-315/275 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

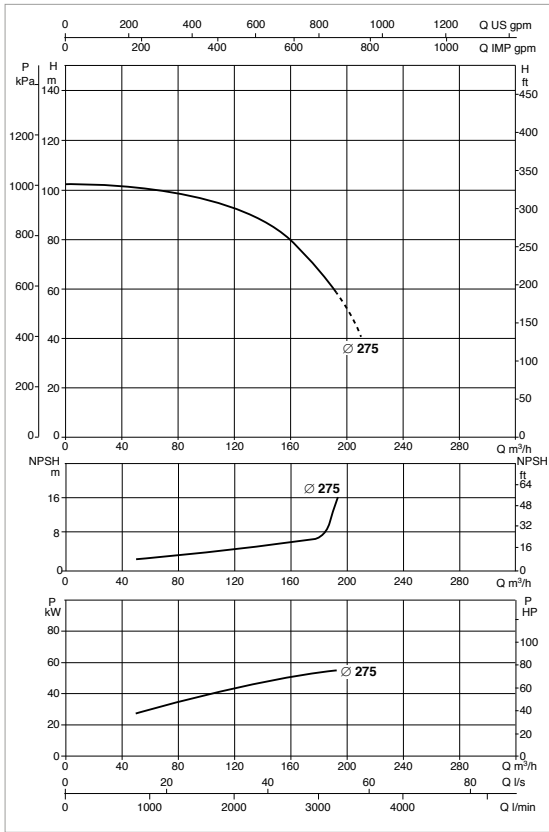

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 65-315/275 55	3 x 400 V ~	KV 3/15 T	55	1,85	95	KDN 65 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP



MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 65-315/275 MD	3 x 230 / 400 V ~	KV 3/15 T	53	1,85	KDN 65 EN 12845	0,40 m²

* Jockey pump on request.



** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE

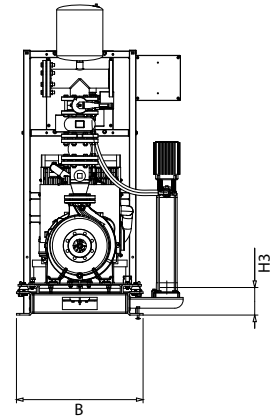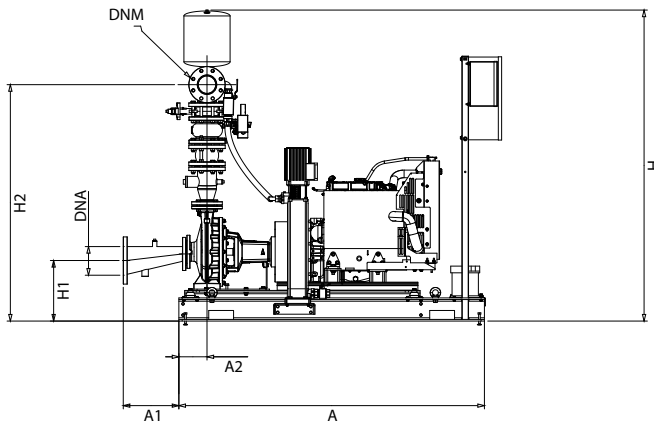


ELECTRIC PUMP MODULE

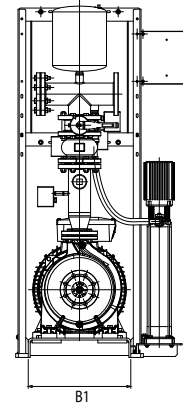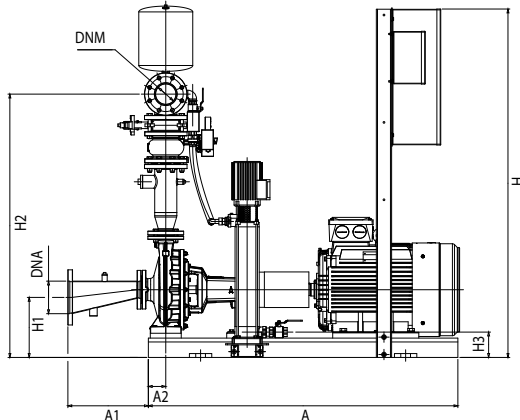


1 KDN 65-315/275 - UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH STANDARDIZED CENTRIFUGAL PUMPS


2 ELECTRIC PUMP MODULES

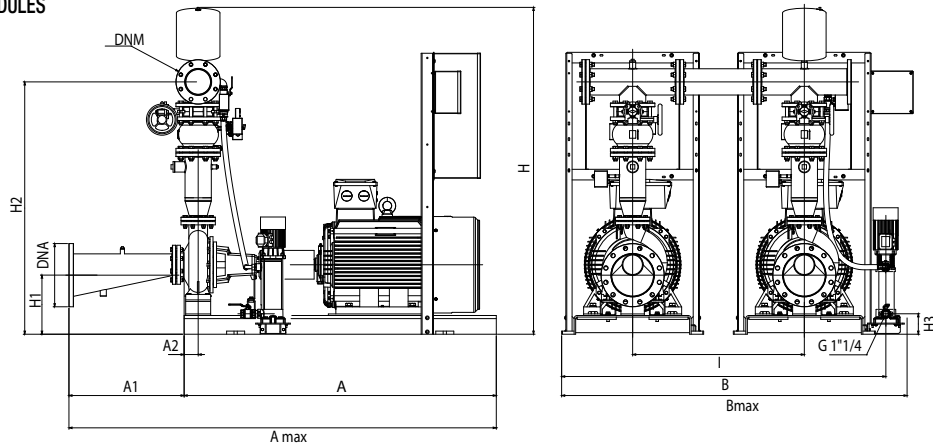

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP MODULE

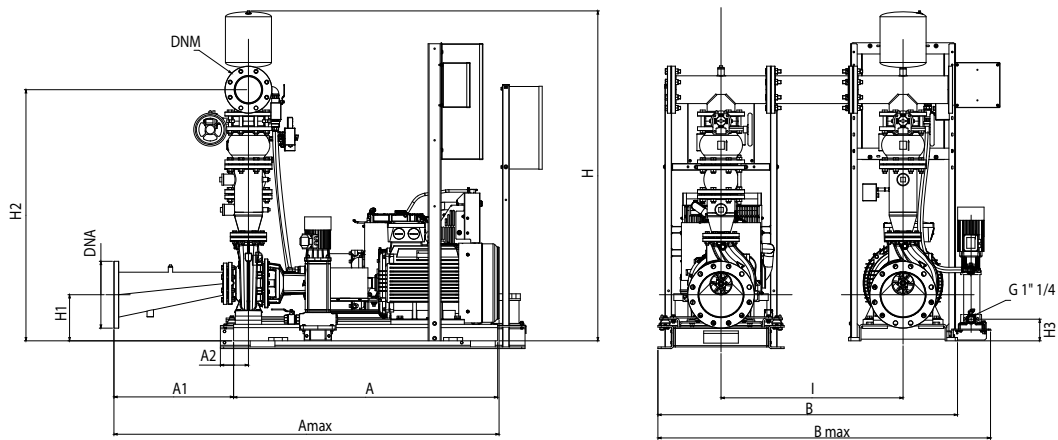

2 DIESEL ENGINE-DRIVEN PUMP MODULES

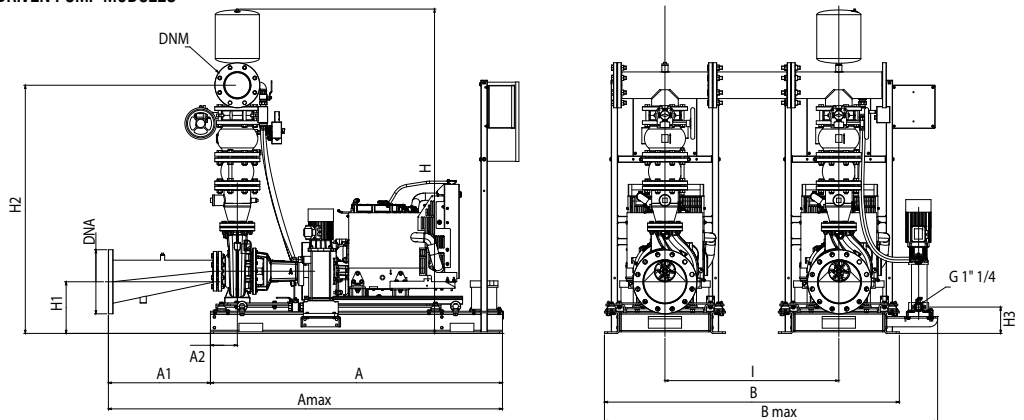


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 65-315/275 - DIESEL ENGINE DRIVEN PUMP MODULE	1846	311	170	2260	765	-	991	2009	366	1558	167	-	-	-	DN 150	DN 100	1038	1077
1 KDN 65-315/275 - ELECTRIC PUMP MODULE	1600	416	90	2021	640	530	917	1931	310	1491	131	-	-	-	DN 150	DN 100	1021	1060
1 KDN 65-315/275 - 2 ELECTRIC PUMP MODULES	1600	416	90	2021	1780	-	2057	1931	310	1491	131	-	-	900	DN 150	DN 100	2042	2081
1 KDN 65-315/275 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1846	311	170	2260	-	-	2256	2009	366	1558	167	-	-	900	DN 150	DN 100	2059	2098
1 KDN 65-315/275 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1846	311	170	2260	-	-	2256	2009	366	1558	167	-	-	900	DN 150	DN 100	2076	2115

1 KDN 65-315/290-305-320 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

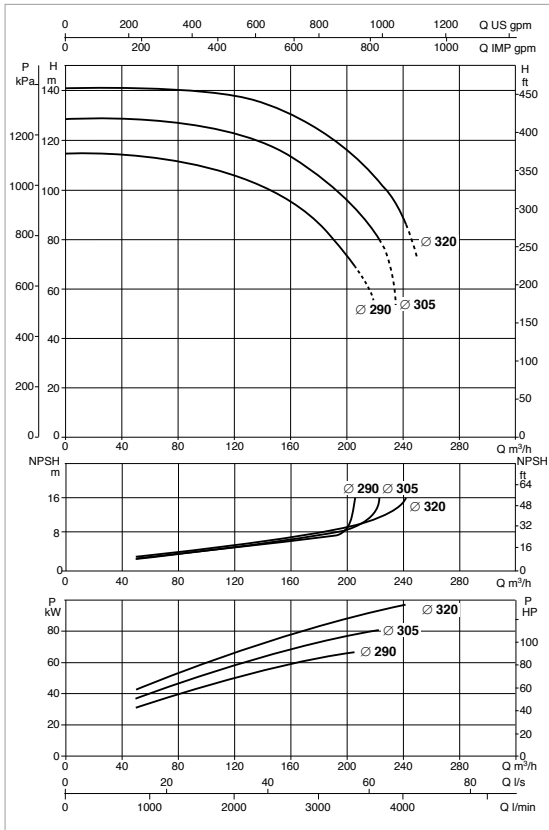

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 65-315/290 75	3 x 400 V ~	KV 3/15 T	75	1,85	124	KDN 65 EN 12845
1 KDN 65-315/305 90	3 x 400 V ~	KV 3/18 T	90	2,2	148	KDN 65 EN 12845
1 KDN 65-315/320 110	3 x 400 V ~	KV 3/18 T	110	2,2	184	KDN 65 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 65-315/290 MD	3 x 230 / 400 V ~	KV 3/15 T	73	1,85	KDN 65 EN 12845	0,40 m²
1 KDN 65-315/305 MD	3 x 230 / 400 V ~	KV 3/18 T	110	2,2	KDN 65 EN 12845	0,40 m²
1 KDN 65-315/320 MD	3 x 230 / 400 V ~	KV 3/18 T	110	2,2	KDN 65 EN 12845	0,40 m²

* Jockey pump on request.


** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE

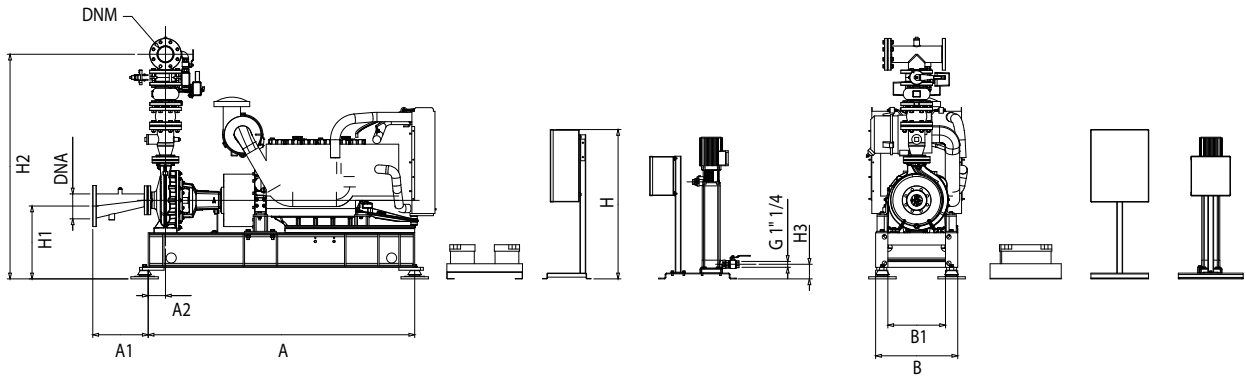


ELECTRIC PUMP MODULE

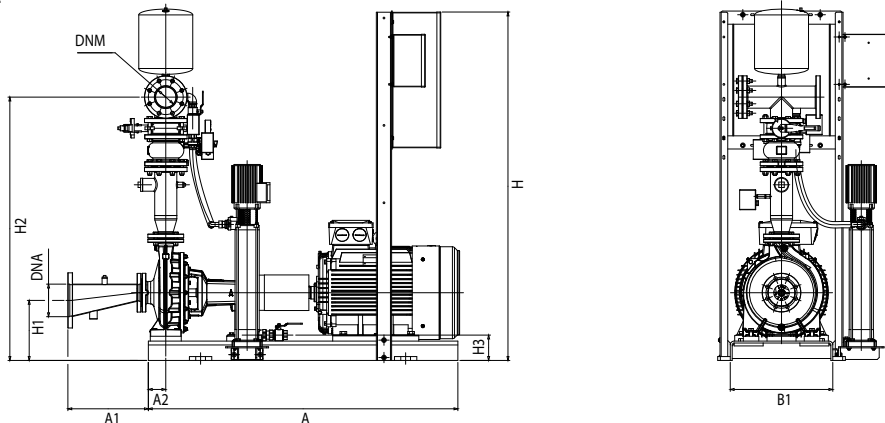


1 KDN 65-315/290-305-320 - UNI EN 12845 FIRE FIGHTING PUMPS SETS


2 ELECTRIC PUMP MODULES

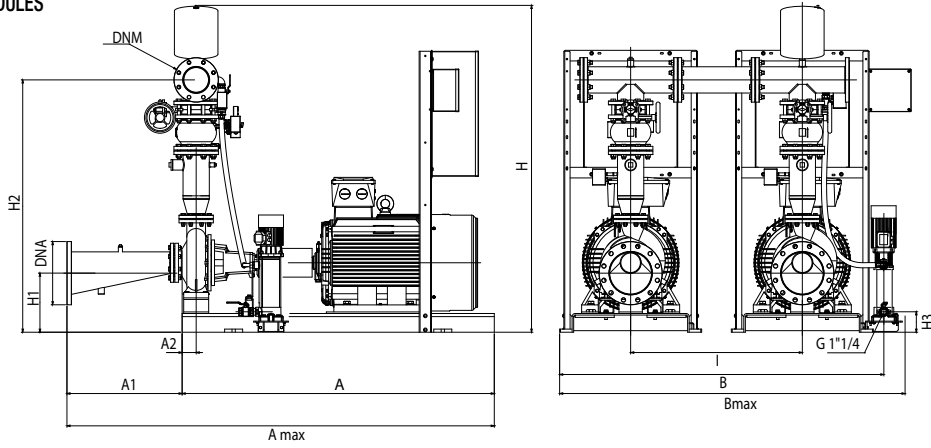

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP MODULE

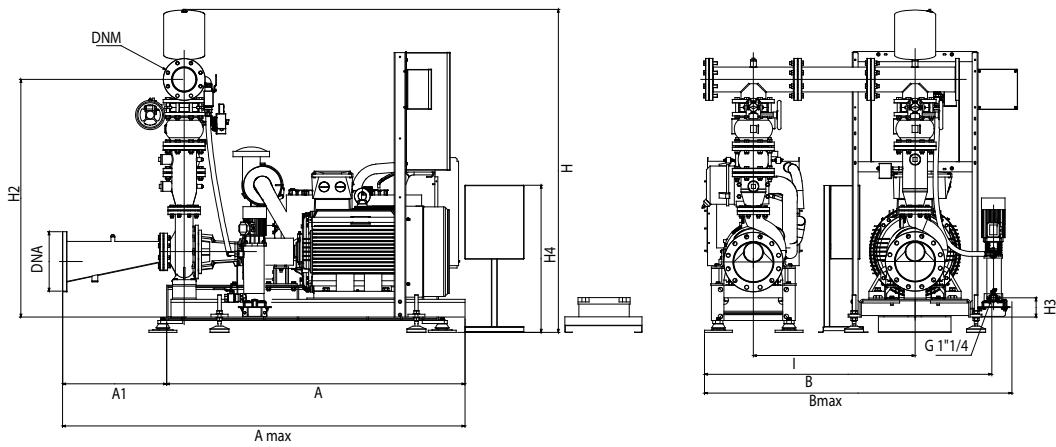

2 DIESEL ENGINE-DRIVEN PUMP MODULES

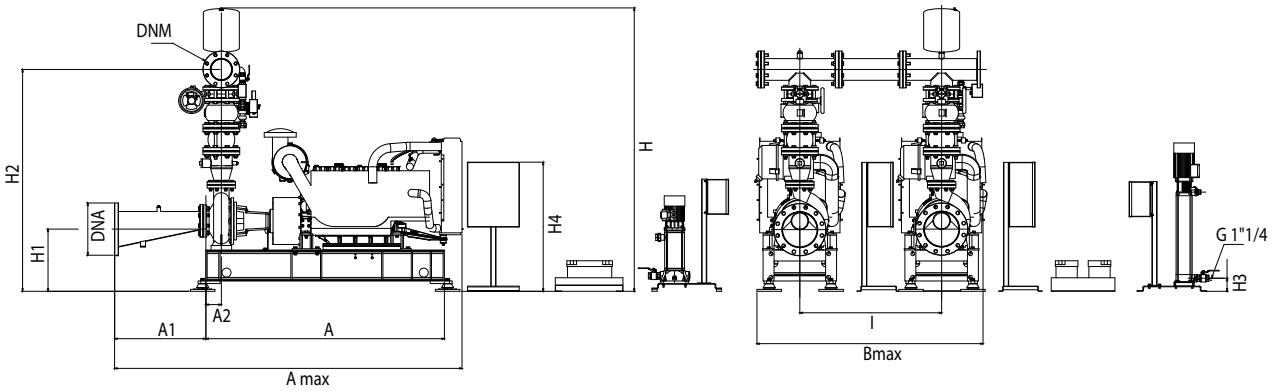


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 65-315/290-305-320 - DIESEL ENGINE DRIVEN PUMP MODULE	1850	385	120	2377	570	-	685	1167	506	1689	101	734	-	-	DN 150	DN 100	1957	1977
1 KDN 65-315/290-305-320 - ELECTRIC PUMP MODULE	2000	416	90	2417	860	750	1152	1931	395	1576	131	734	-	-	DN 150	DN 100	1979	1999
1 KDN 65-315/290-305-320 - 2 ELECTRIC PUMP MODULES	2000	416	90	2417	2220	-	2512	1931	395	1576	131	734	-	900	DN 150	DN 100	3958	3978
1 KDN 65-315/290-305-320 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1850	385	120	2377	-	-	1755	1931	506	1576	101	734	-	900	DN 150	DN 100	3936	3956
1 KDN 65-315/290-305-320 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1850	385	120	2377	-	-	1755	1167	506	1689	101	734	-	900	DN 150	DN 100	3914	3934

1 KDN 80-160/177 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

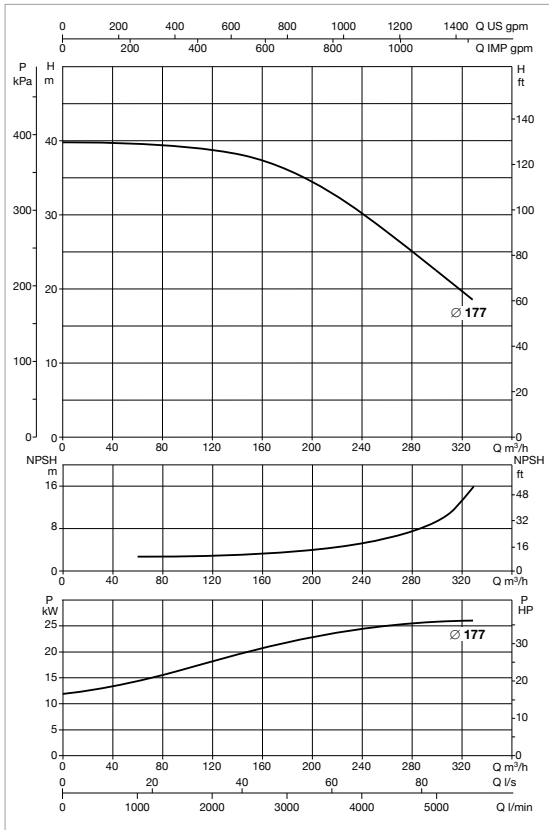

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 80-160/177 30	3 x 400 V ~	KVCX 65/80 T	30	2,2	52	KDN 80 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 80-160/177 MD	3 x 230 / 400 V ~	KVCX 65/80 T	26	2,2	KDN 80 EN 12845	0,22 m²

* Jockey pump on request.


** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE

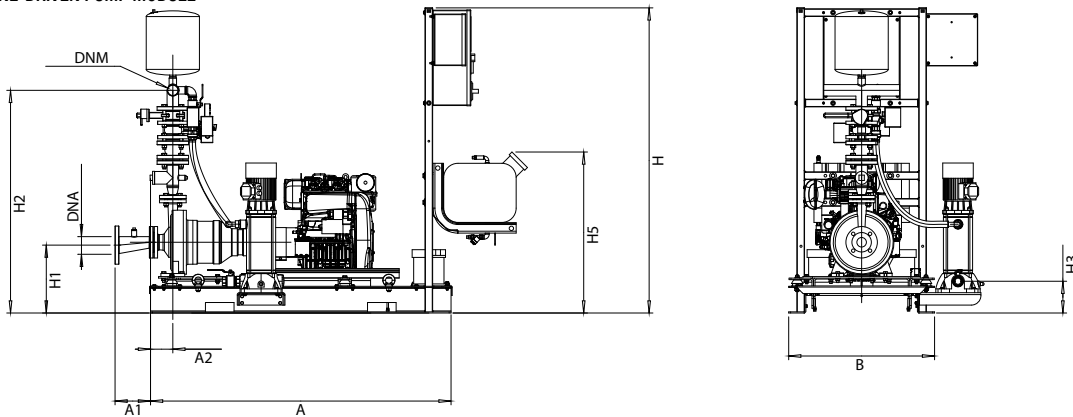


ELECTRIC PUMP MODULE

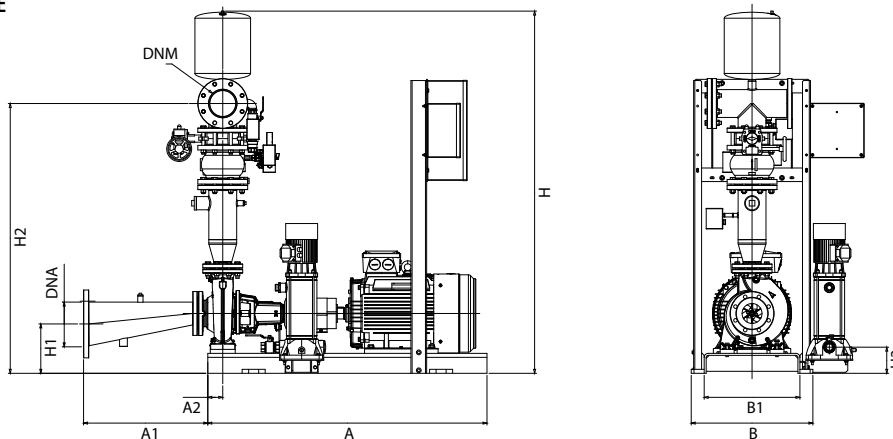


The dashed components are not included in the standard supply.

1 KDN 80-160/177 - UNI EN 12845 FIRE FIGHTING PUMPS SETS


2 ELECTRIC PUMP MODULES

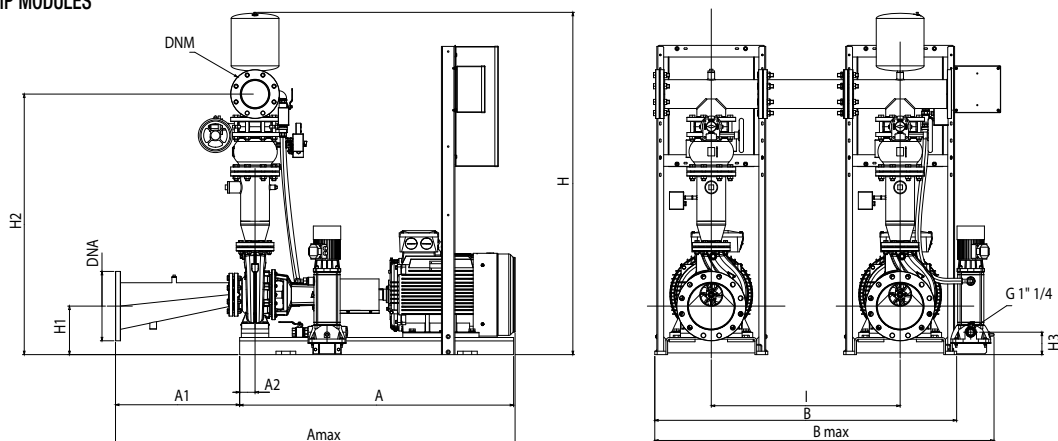

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP MODULE

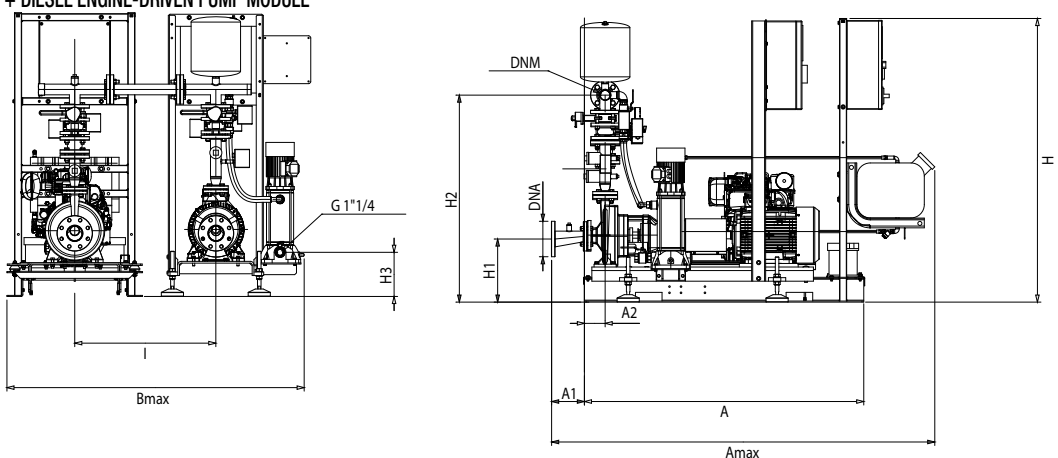

2 DIESEL ENGINE-DRIVEN PUMP MODULES

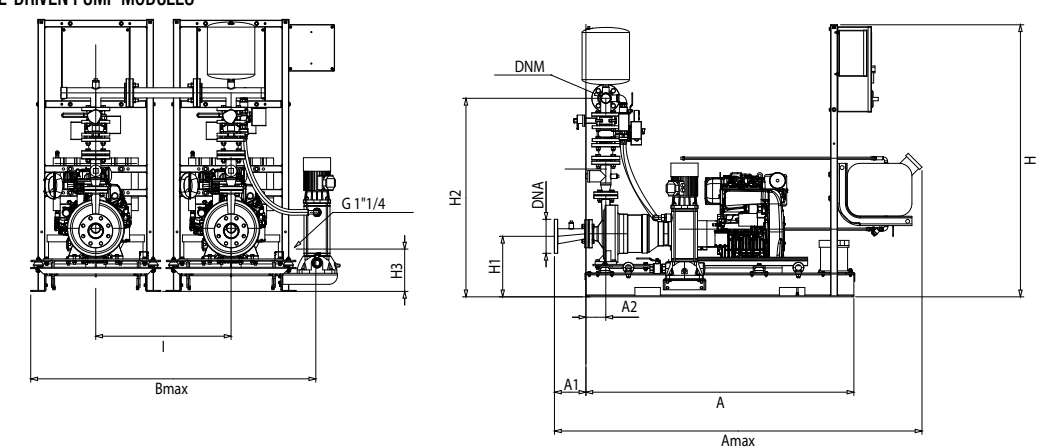


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 80-160/177 - DIESEL ENGINE DRIVEN PUMP MODULE	1576	582	117	2559	765	-	1066	1750	319	1572	167	-	844	-	DN 200	DN 125	734	752
1 KDN 80-160/177 - ELECTRIC PUMP MODULE	1400	623	75	2023	610	480	867	1966	248	1503	131	-	-	-	DN 200	DN 125	700	748
1 KDN 80-160/177 - 2 ELECTRIC PUMP MODULES	1400	623	75	2023	1720	-	1977	1966	248	1503	131	-	-	900	DN 200	DN 125	1400	1448
1 KDN 80-160/177 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1576	582	117	2559	-	-	2331	1966	319	1572	167	-	844	900	DN 200	DN 125	1434	1482
1 KDN 80-160/177 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1576	582	117	2559	-	-	2331	1750	319	1572	167	-	844	900	DN 200	DN 125	1468	1486

1 KDN 80-200/200 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

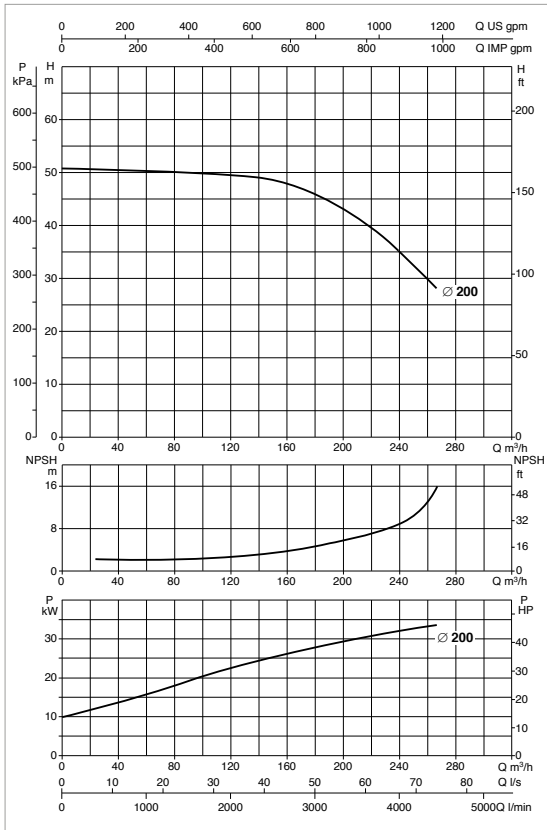

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 80-200/200 37	3 x 400 V ~	KVCX 65/80 T	37	2,2	63	KDN 80 EN 12845



KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP

MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 80-200/200 MD	3 x 230 / 400 V ~	KVCX 65/80 T	37	2,2	KDN 80 EN 12845	0,40 m²

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

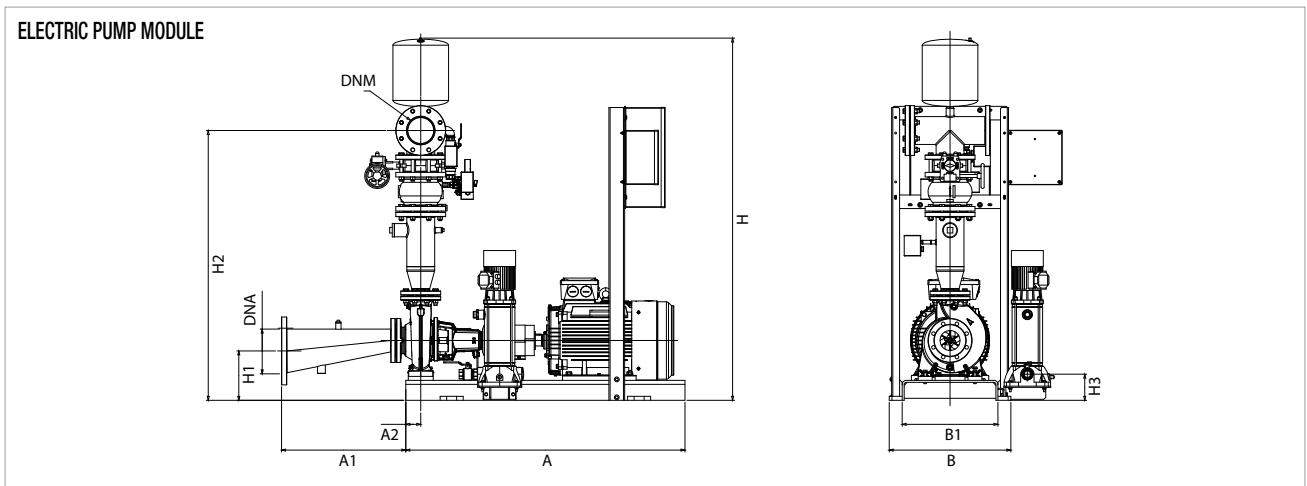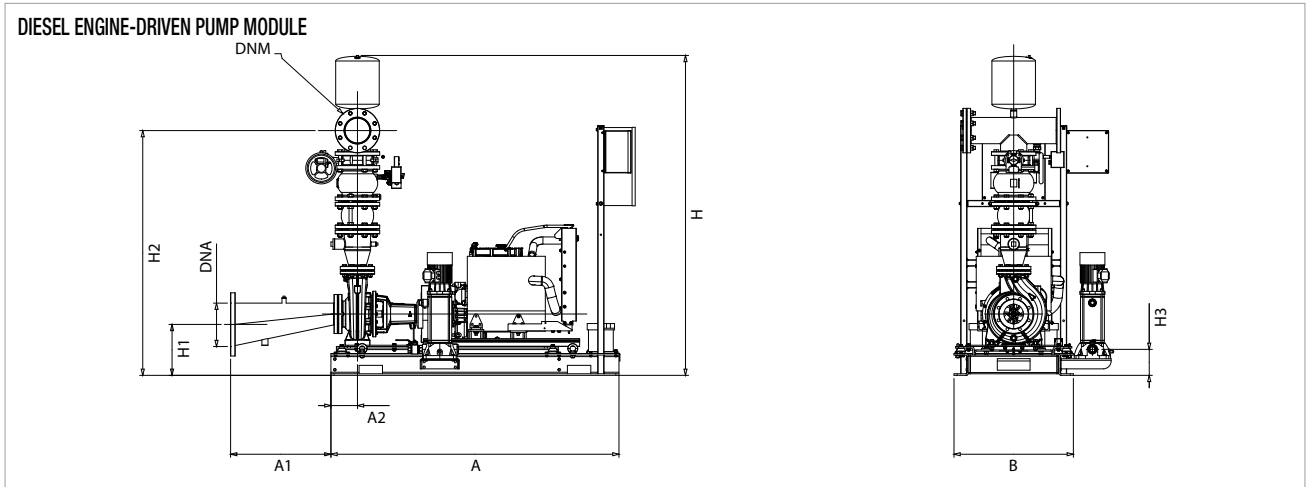



The dashed components are not included in the standard supply.

1 KDN 80-200/200 - UNI EN 12845 FIRE FIGHTING PUMPS SETS



2 ELECTRIC PUMP MODULES

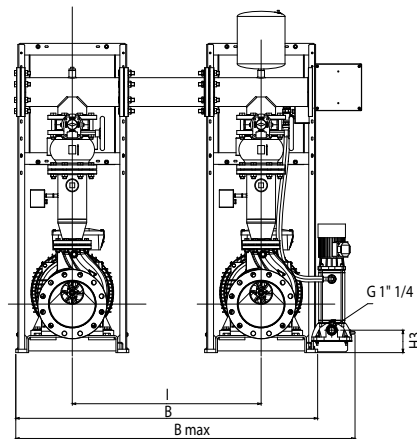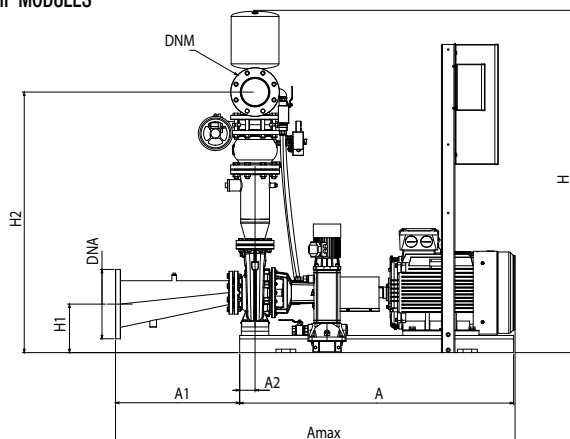

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP MODULE

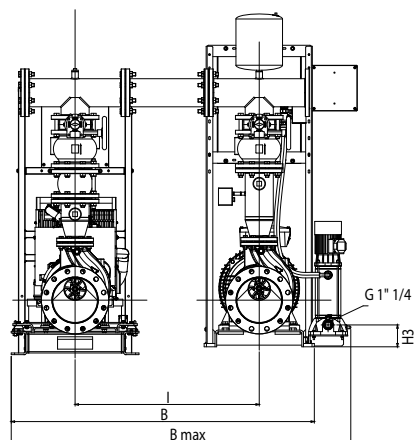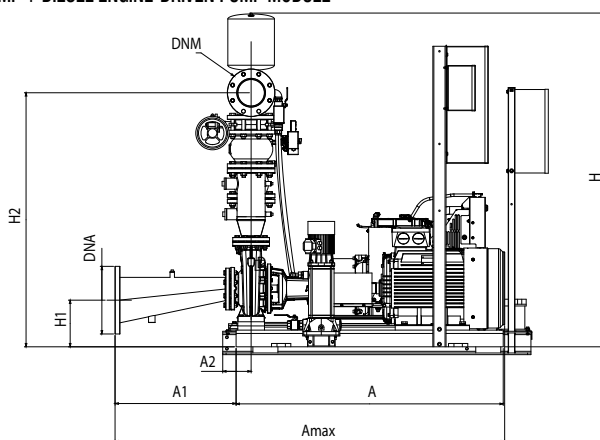

2 DIESEL ENGINE-DRIVEN PUMP MODULES

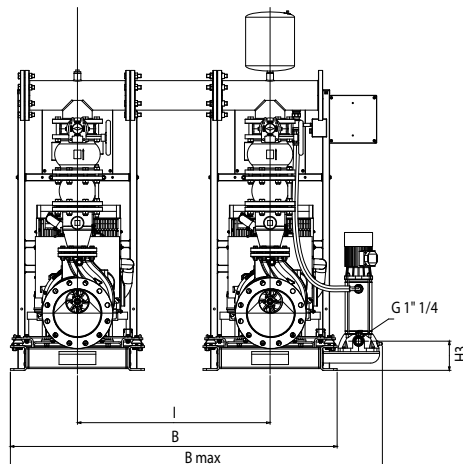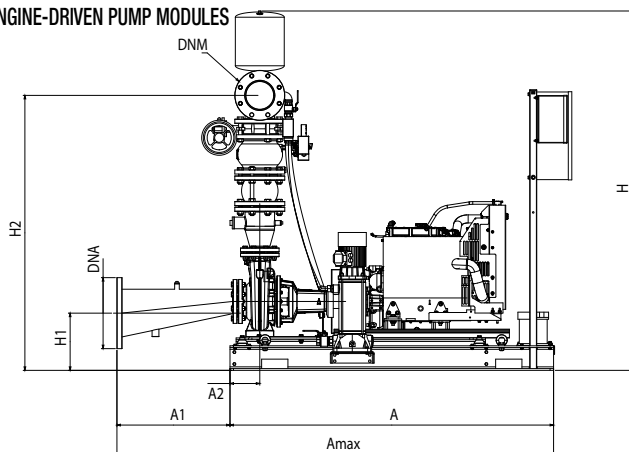


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 80-200/200 - DIESEL ENGINE DRIVEN PUMP MODULE	1846	525	170	2479	765	-	1023	1974	320	1604	167	-	-	-	DN 200	DN 125	877	897
1 KDN 80-200/200 - ELECTRIC PUMP MODULE	1400	623	75	2077	610	480	867	1991	248	1528	131	-	-	-	DN 200	DN 125	990	1015
1 KDN 80-200/200 - 2 ELECTRIC PUMP MODULES	1400	623	75	2077	1720	-	1977	1991	248	1528	131	-	-	900	DN 200	DN 125	1980	2005
1 KDN 80-200/200 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1846	525	170	2479	-	-	2288	1991	320	1604	167	-	-	900	DN 200	DN 125	1867	1892
1 KDN 80-200/200 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1846	525	170	2479	-	-	2288	1974	320	1604	167	-	-	900	DN 200	DN 125	1754	1774

1 KDN 80-200/222 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

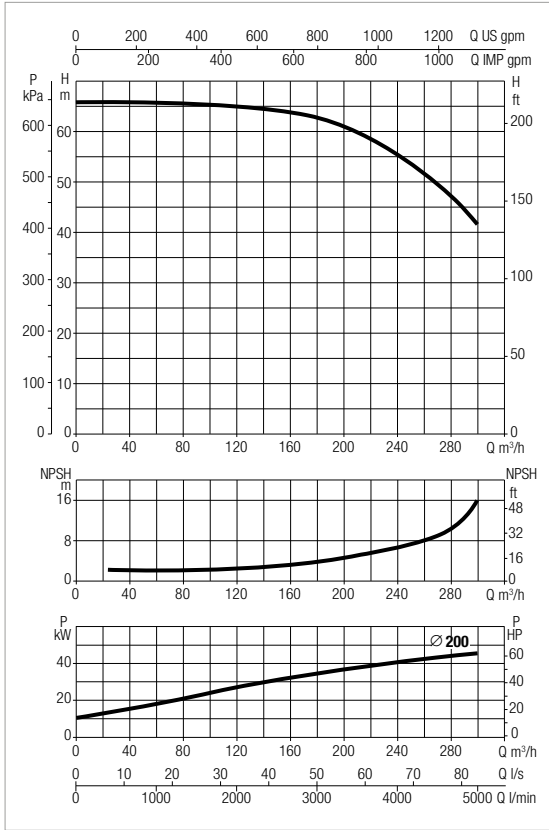

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 80-200/222 45	3 x 400 V ~	KVCX 65/80 T	45	2,2	76	KDN 80 EN 12845



KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP

MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 80-200/222 MD	3 x 230 / 400 V ~	KVCX 65/80 T	53	2,2	KDN 80 EN 12845	0,40 m²

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

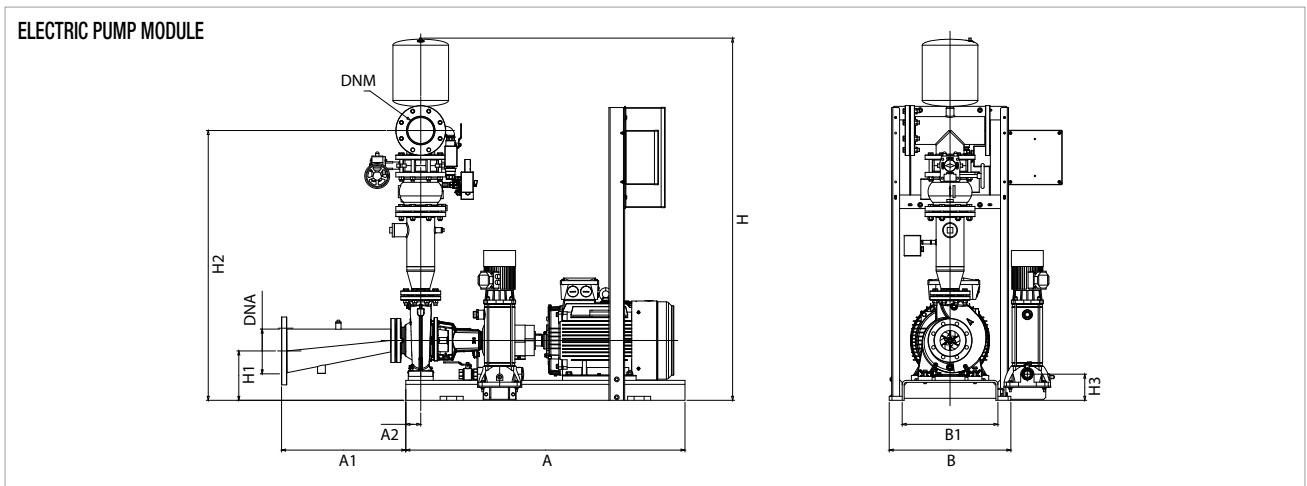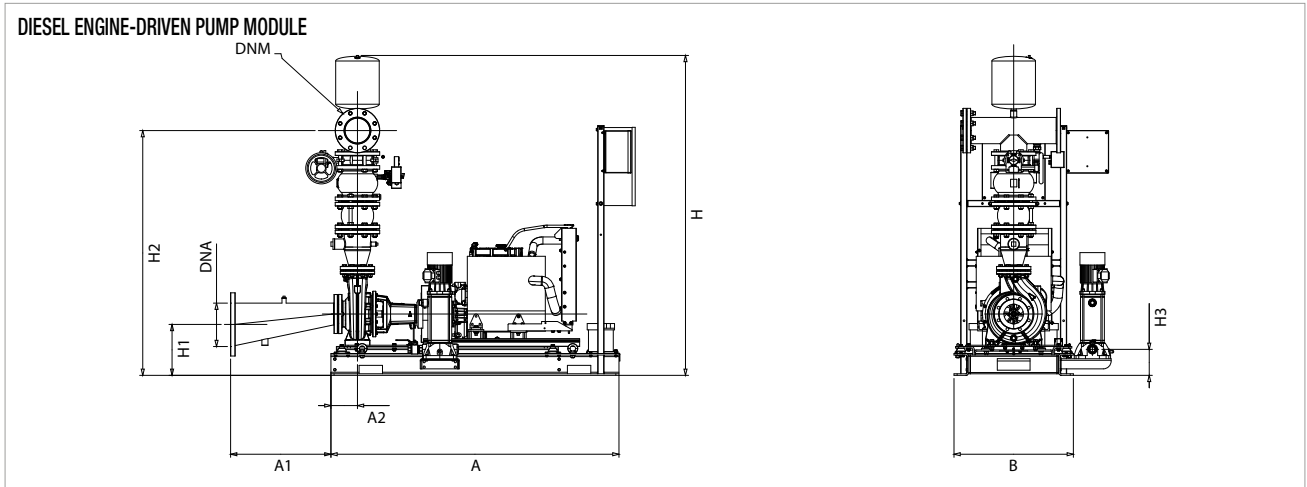



The dashed components are not included in the standard supply.

1 KDN 80-200/222 - UNI EN 12845 FIRE FIGHTING PUMPS SETS



2 ELECTRIC PUMP MODULES

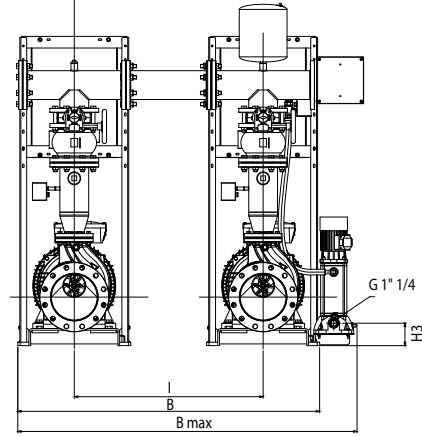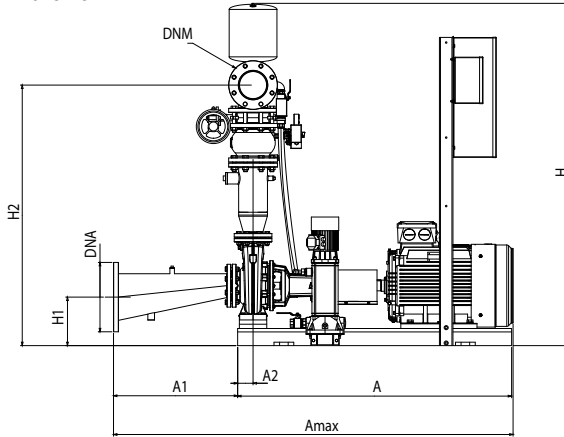

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP MODULE

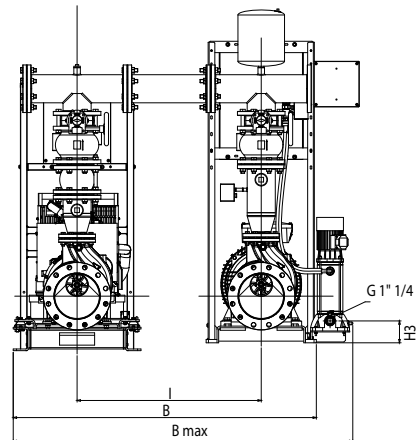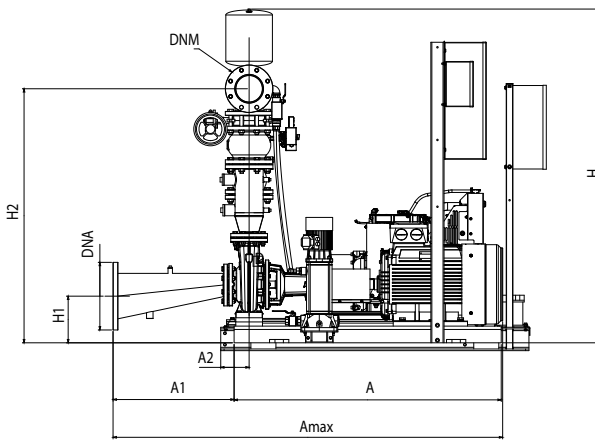

2 DIESEL ENGINE-DRIVEN PUMP MODULES

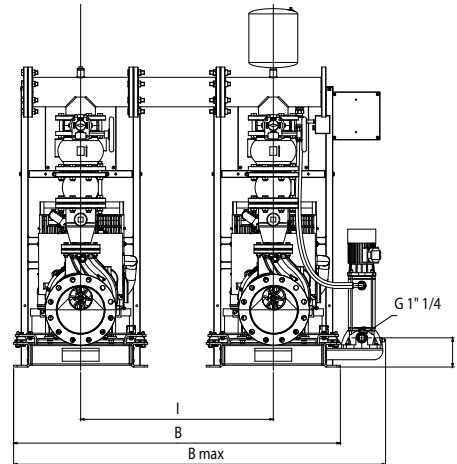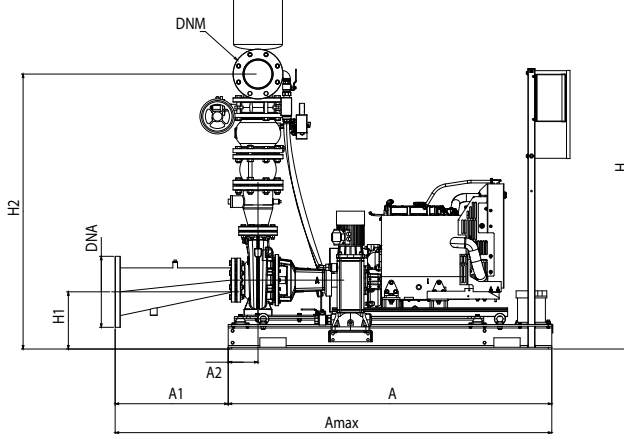


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 80-200/222 - DIESEL ENGINE DRIVEN PUMP MODULE	1846	525	170	2479	765	-	1023	1974	320	1604	167	-	-	-	DN 200	DN 125	990	1015
1 KDN 80-200/222 - ELECTRIC PUMP MODULE	1400	623	75	2077	610	480	867	1991	248	1528	131	-	-	-	DN 200	DN 125	877	897
1 KDN 80-200/222 - 2 ELECTRIC PUMP MODULES	1400	623	75	2077	1720	-	1977	1991	248	1528	131	-	-	900	DN 200	DN 125	1980	2005
1 KDN 80-200/222 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1846	525	170	2479	-	-	2288	1991	320	1604	167	-	-	900	DN 200	DN 125	1867	1892
1 KDN 80-200/222 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1846	525	170	2479	-	-	2288	1974	320	1604	167	-	-	900	DN 200	DN 125	1754	1774

1 KDN 80-250/240 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

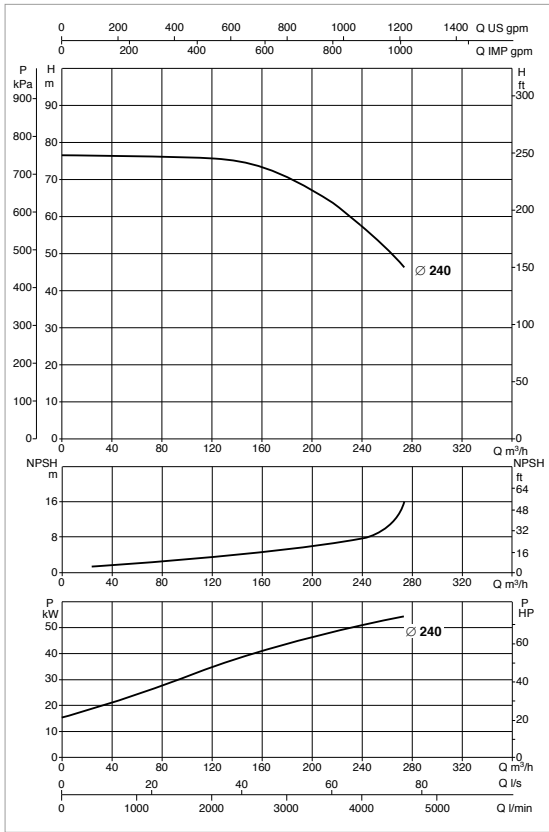

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 80-250/240 55	3 x 400 V ~	KVCX 65/80 T	55	2,2	95	KDN 80 EN 12845



KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP

MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 80-250/240 MD	3 x 230 / 400 V ~	KVCX 65/80 T	73	2,2	KDN 80 EN 12845	0,40 m²

* Jockey pump on request.




** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

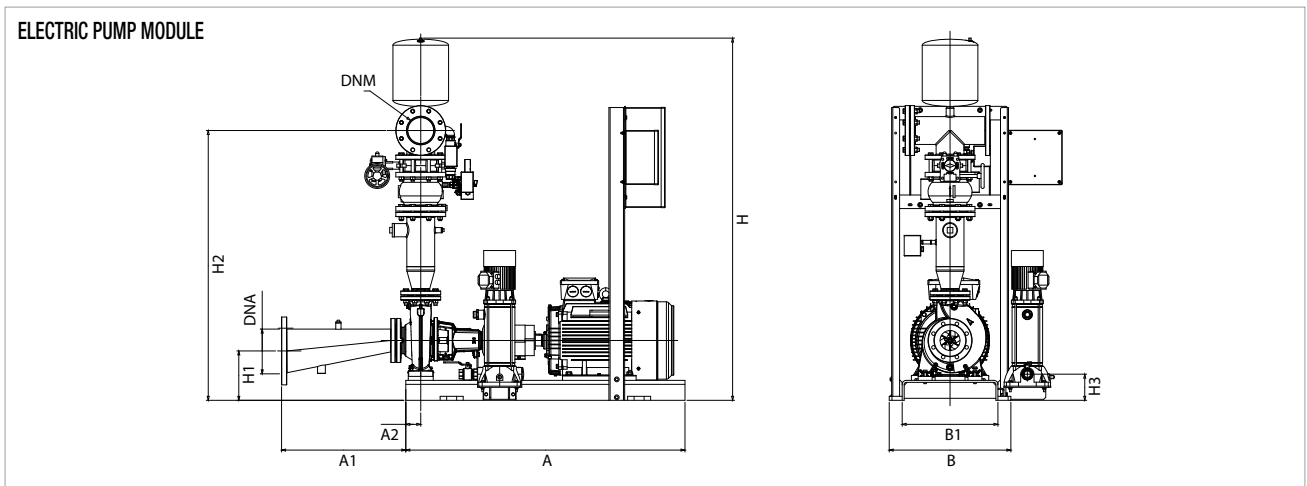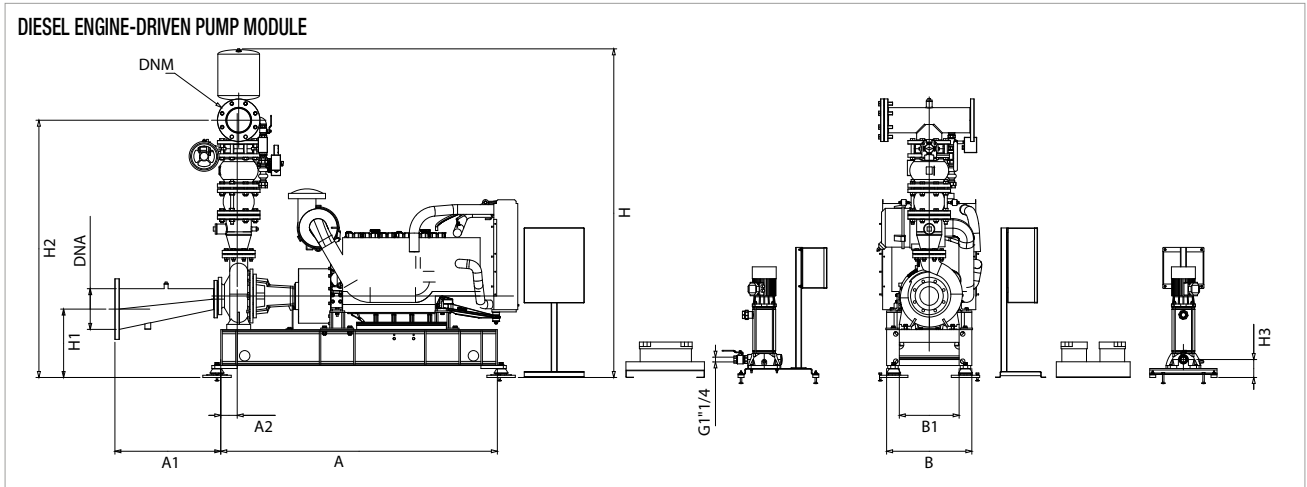

The dashed components are not included in the standard supply.

1 KDN 80-250/240 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

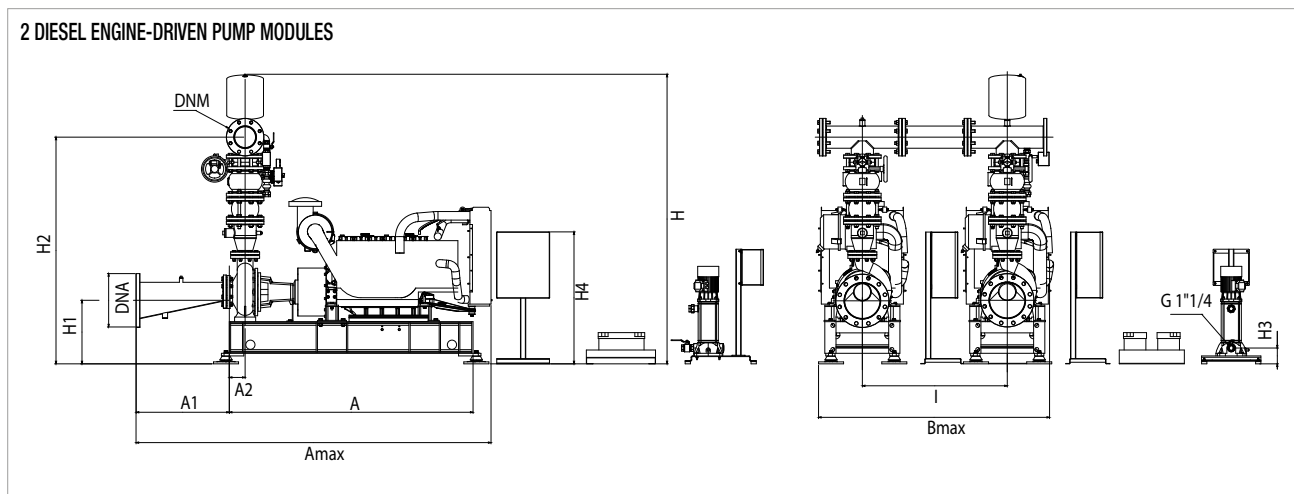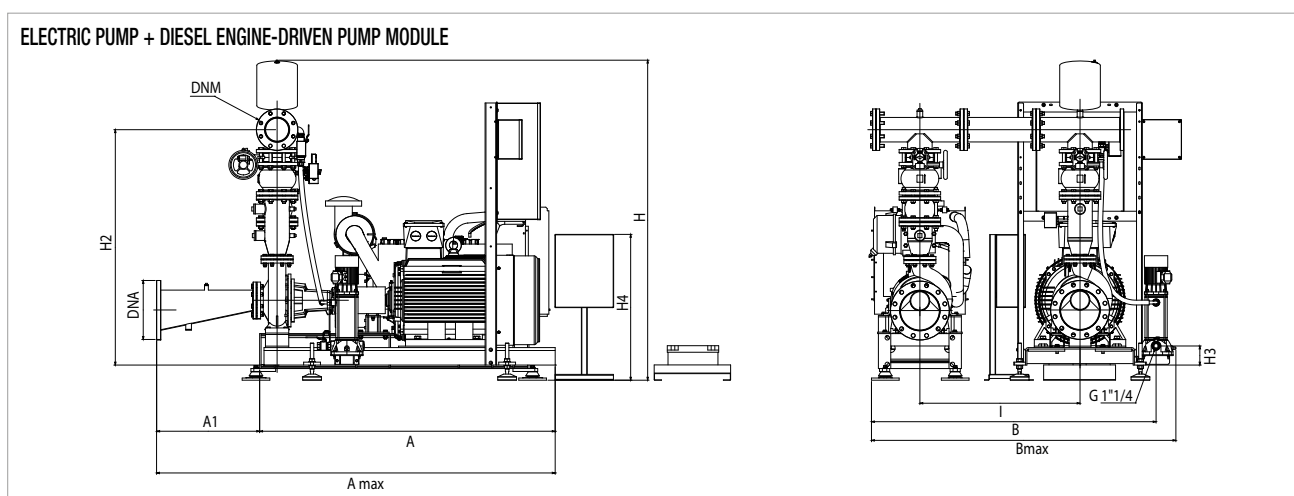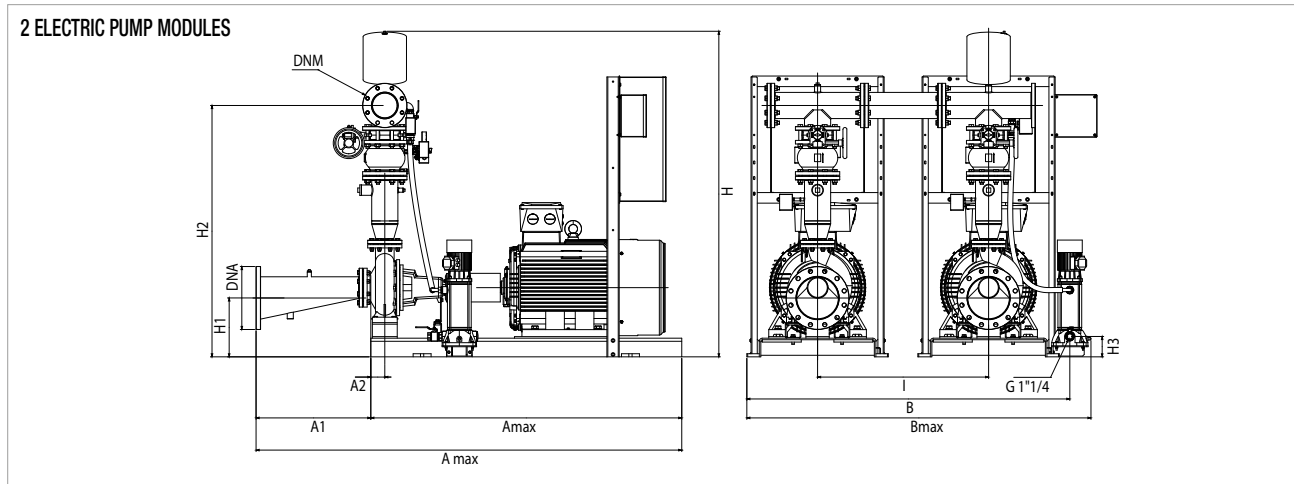


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DN1	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 80-250/240 - DIESEL ENGINE DRIVEN PUMP MODULE	1626	578	120	2326	570	-	675	1187	468	1781	120	734	-	-	DN 250	DN 125	1042	1096
1 KDN 80-250/240 - ELECTRIC PUMP MODULE	1600	608	90	2217	660	530	917	2071	298	1608	131	734	-	-	DN 250	DN 125	1025	1079
1 KDN 80-250/240 - 2 ELECTRIC PUMP MODULES	1600	608	90	2217	1820	-	2077	2071	298	1608	131	734	-	900	DN 250	DN 125	2050	2104
1 KDN 80-250/240 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1626	578	120	2326	-	-	1745	2071	468	1608	120	734	-	900	DN 250	DN 125	2067	2121
1 KDN 80-250/240 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1626	578	120	2326	-	-	1745	1187	468	1781	120	734	-	900	DN 250	DN 125	2084	2138

1 KDN 80-250/260-270 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

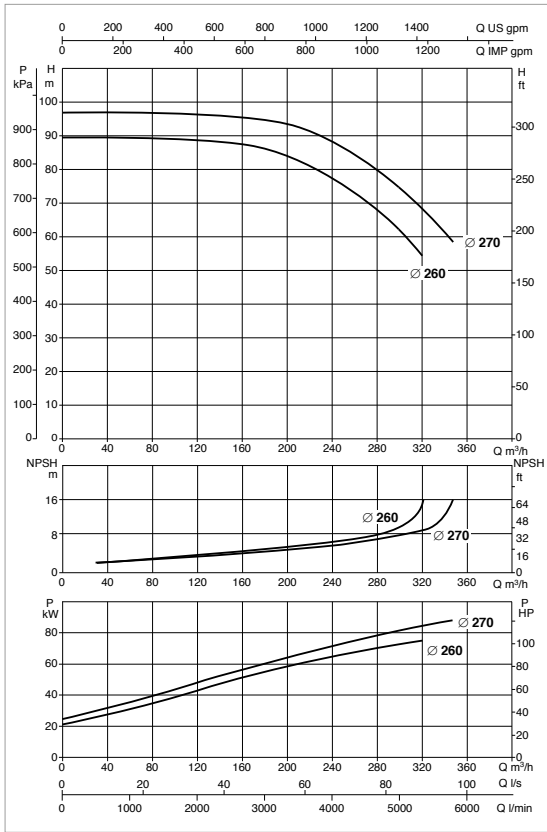

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 80-250/260 75	3 x 400 V ~	KVCX 65/80 T	75	2,2	124	KDN 80 EN 12845
1 KDN 80-250/270 90	3 x 400 V ~	KVCX 65/80 T	90	2,2	148	KDN 80 EN 12845



KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP

MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 80-250/260 MD	3 x 230 / 400 V ~	KVCX 65/80 T	110	2,2	KDN 80 EN 12845	0,40 m²
1 KDN 80-250/270 MD	3 x 230 / 400 V ~	KVCX 65/80 T	110	2,2	KDN 80 EN 12845	0,40 m²

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

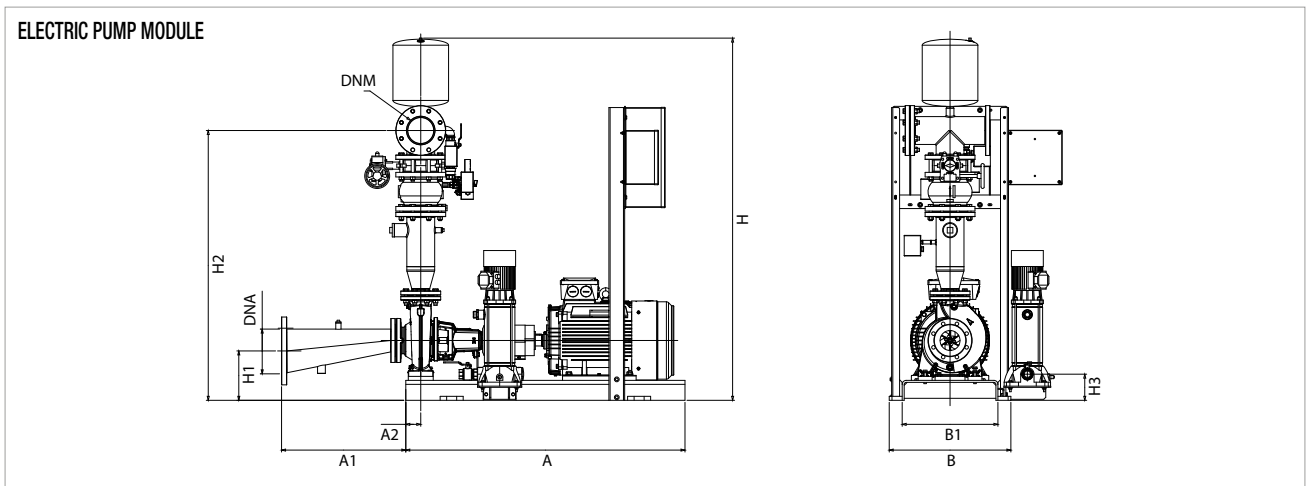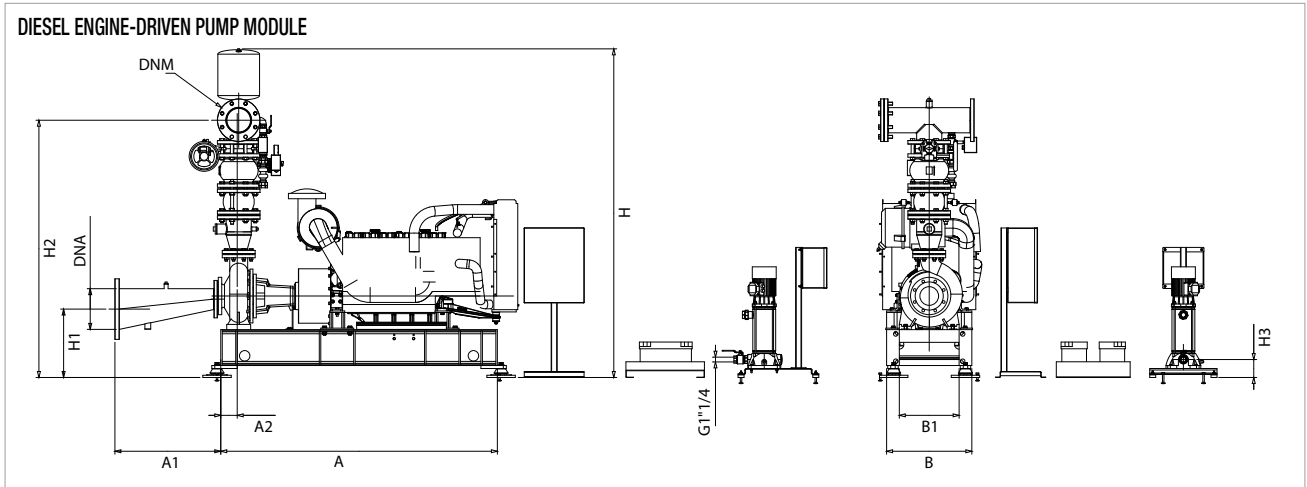


The dashed components are not included in the standard supply.

1 KDN 80-250/260-270 - UNI EN 12845 FIRE FIGHTING PUMPS SETS


2 ELECTRIC PUMP MODULES

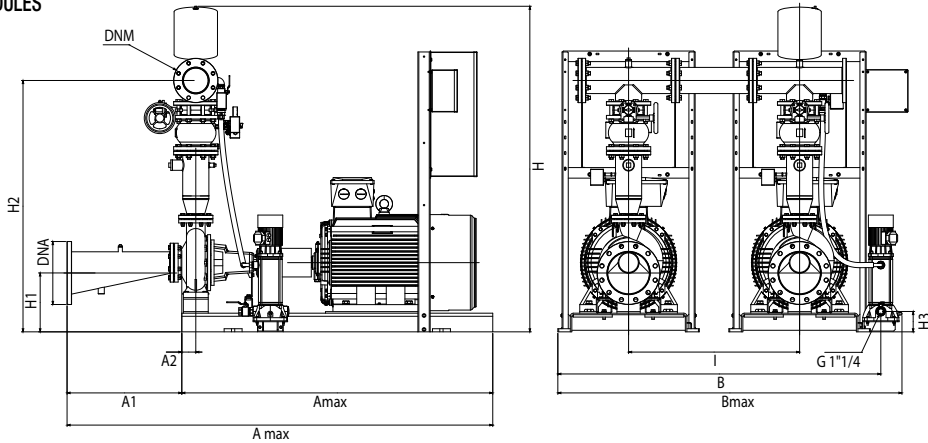

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP MODULE

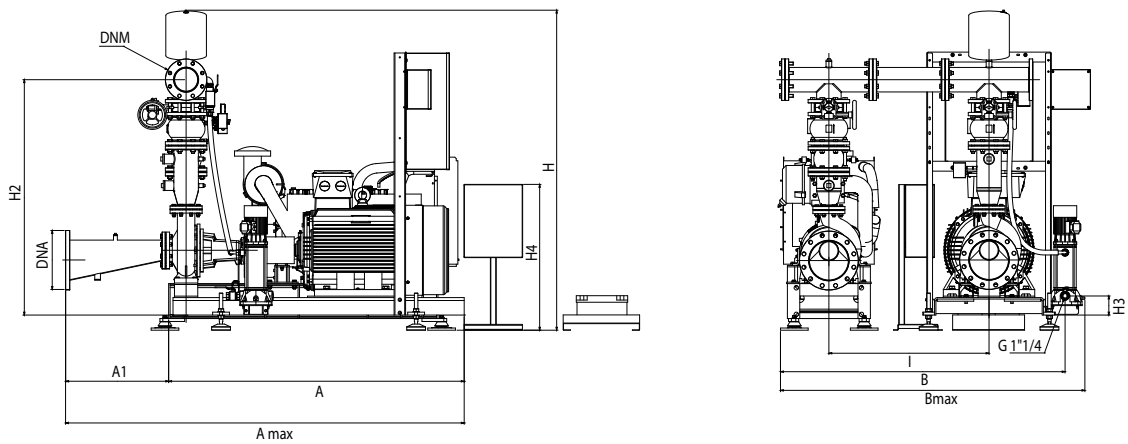

2 DIESEL ENGINE-DRIVEN PUMP MODULES

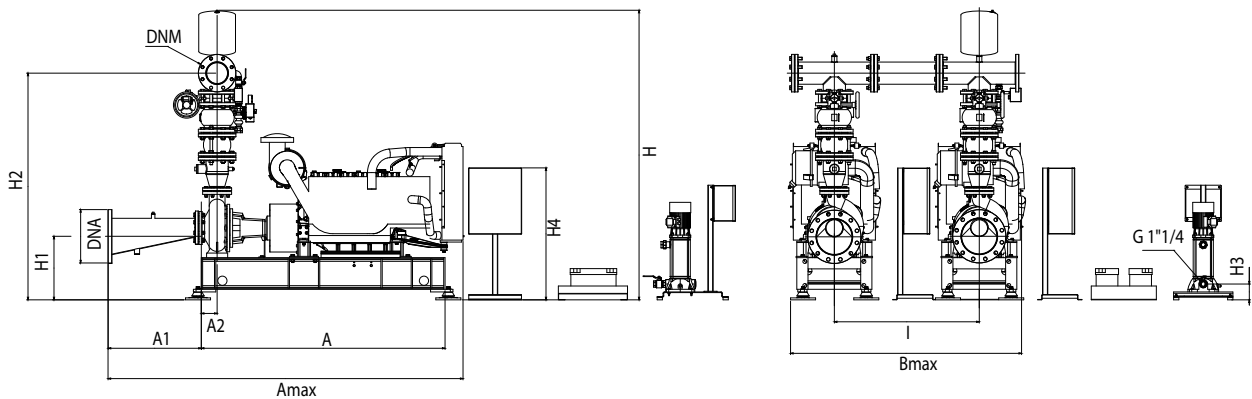


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DN1	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 80-250/260-270 - DIESEL ENGINE DRIVEN PUMP MODULE	1850	578	120	2576	570	-	693	1187	468	1781	120	734	-	-	DN 250	DN 125	1484	1512
1 KDN 80-250/260-270 - ELECTRIC PUMP MODULE	1800	608	90	2408	730	600	987	2101	328	1638	131	734	-	-	DN 250	DN 125	1467	1495
1 KDN 80-250/260-270 - 2 ELECTRIC PUMP MODULES	1800	608	90	2408	1960	-	2217	2101	328	1638	131	734	-	900	DN 250	DN 125	2934	2962
1 KDN 80-250/260-270 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1850	578	120	2576	-	-	1763	2101	468	1638	120	734	-	900	DN 250	DN 125	2951	2979
1 KDN 80-250/260-270 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1850	578	120	2576	-	-	1763	1187	468	1781	120	734	-	900	DN 250	DN 125	2968	2996

1 KDN 80-315/290 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

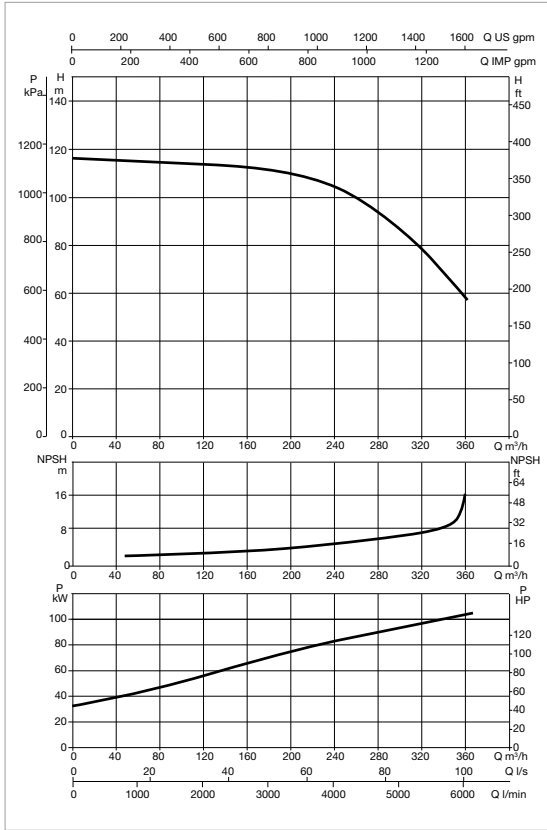

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 80-315/290 110	3 x 400 V ~	KV 3/15 T	110	1,85	184	KDN 80 EN 12845



KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP

MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 80-315/290 MD	3 x 230 / 400 V ~	KV 3/15 T	110	1,85	KDN 80 EN 12845	0,40 m²

* Jockey pump on request.




** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

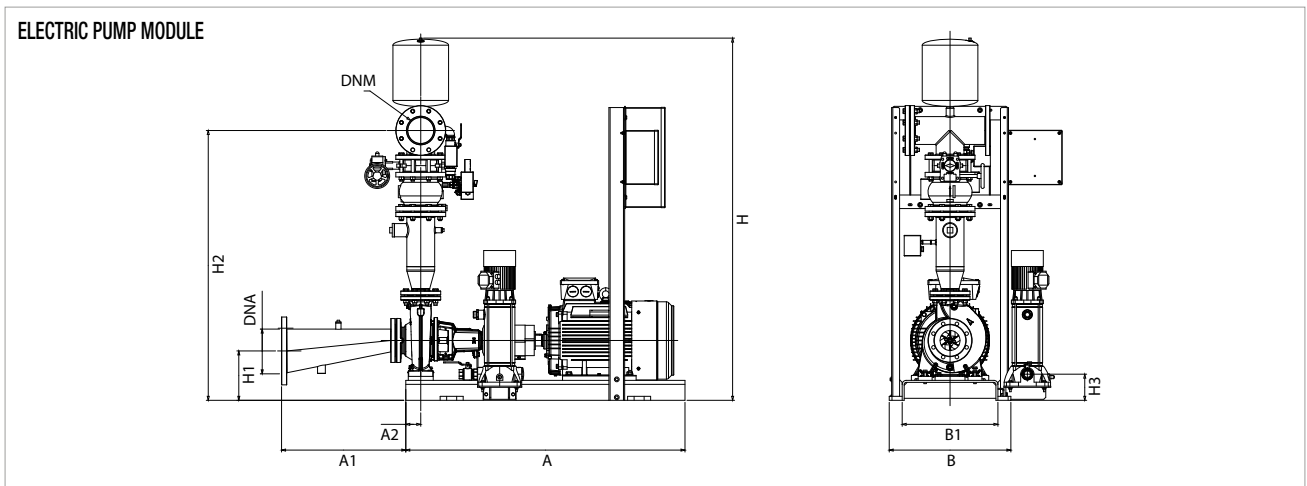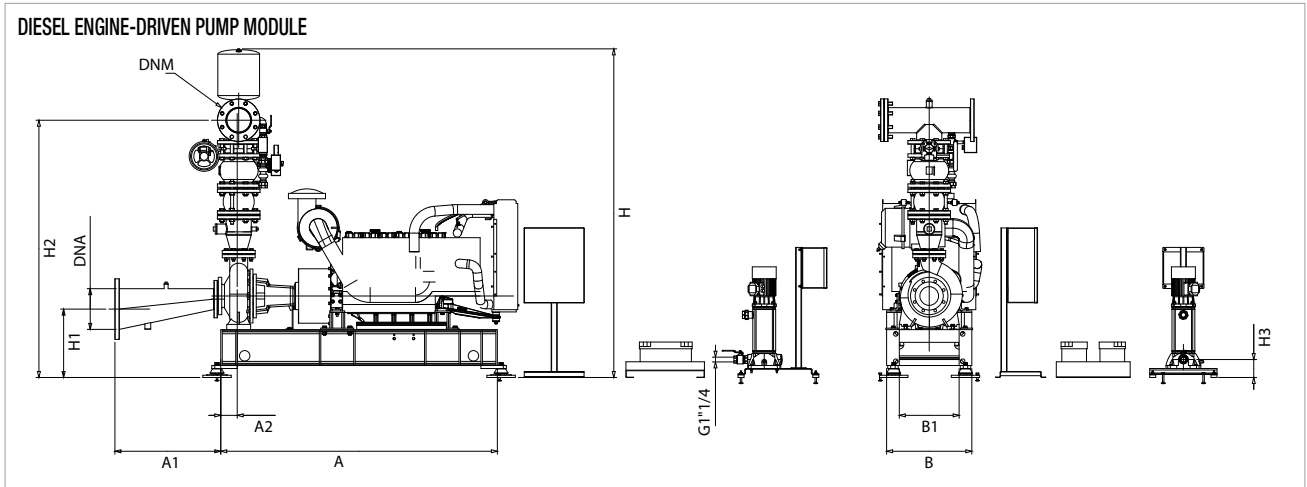

The dashed components are not included in the standard supply.

1 KDN 80-315/290 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

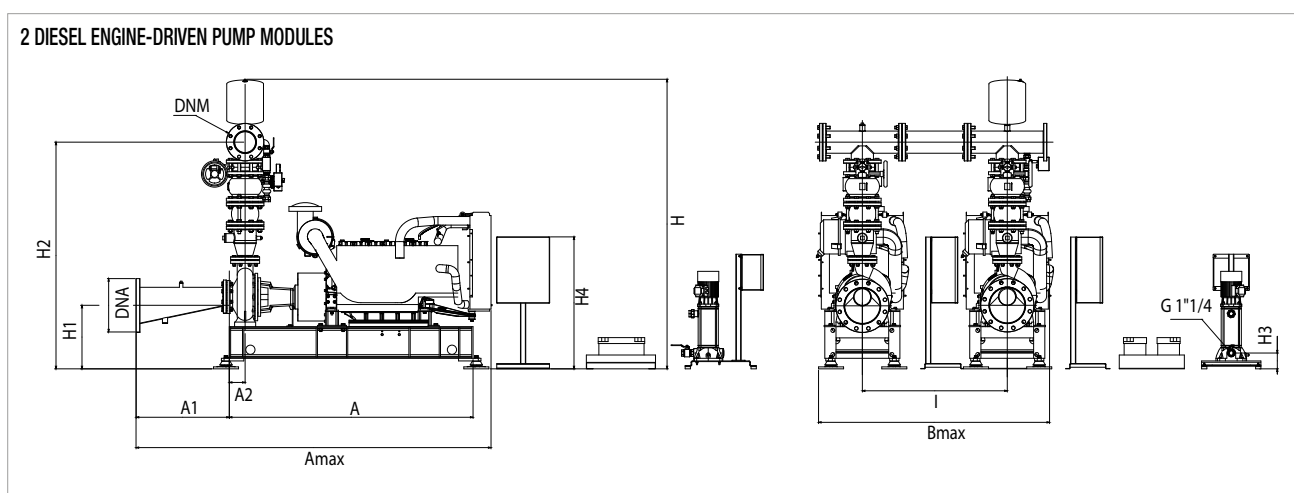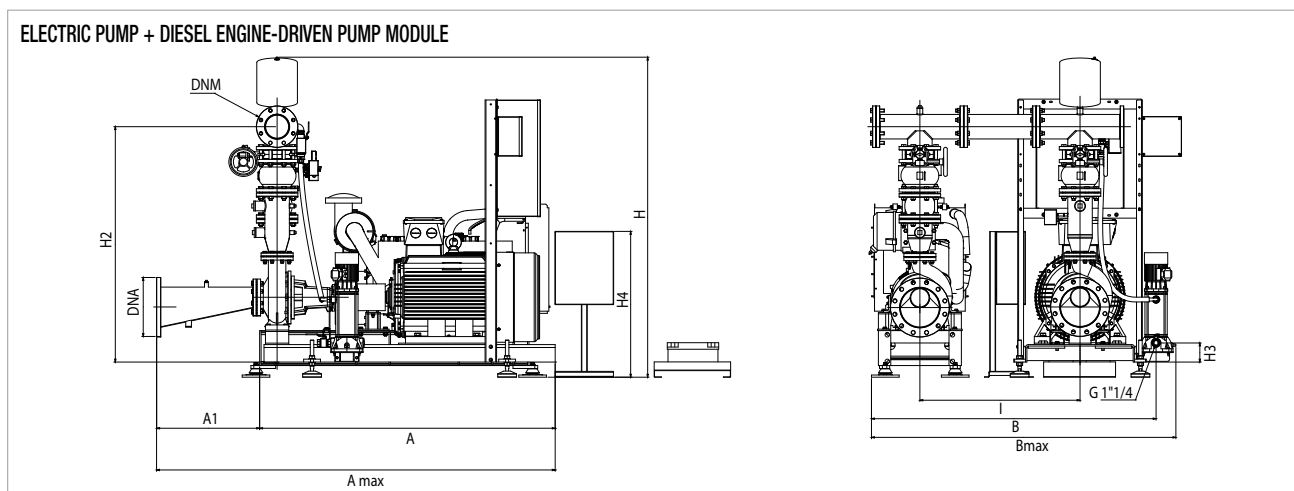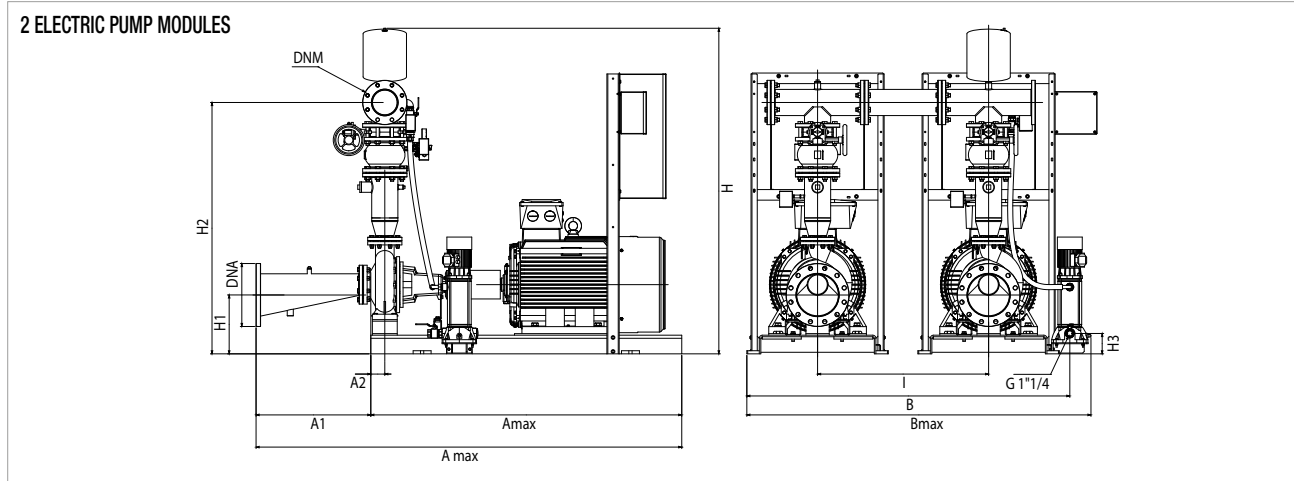


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DN	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 80-315/290 - DIESEL ENGINE DRIVEN PUMP MODULE	1850	578	120	2576	570	600	905	2042	458	1812	131	1195	-	-	DN 250	DN 125	1400	1430
1 KDN 80-315/290 - ELECTRIC PUMP MODULE	2000	608	90	2608	910	750	1152	2042	382	1578	131	-	-	-	DN 250	DN 125	1430	1460
1 KDN 80-315/290 - 2 ELECTRIC PUMP MODULES	2000	608	90	2608	1940	750	2137	2042	382	1578	131	-	-	900	DN 250	DN 125	2860	2890
1 KDN 80-315/290 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	2000	608	120	2608	1940	750	2256	2042	458	1812	131	1195	-	900	DN 250	DN 125	2830	2860
1 KDN 80-315/290 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1850	578	120	2576	1940	600	2256	2042	458	1812	131	1195	-	900	DN 250	DN 125	2800	2830

1 KDN 100-200/200 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

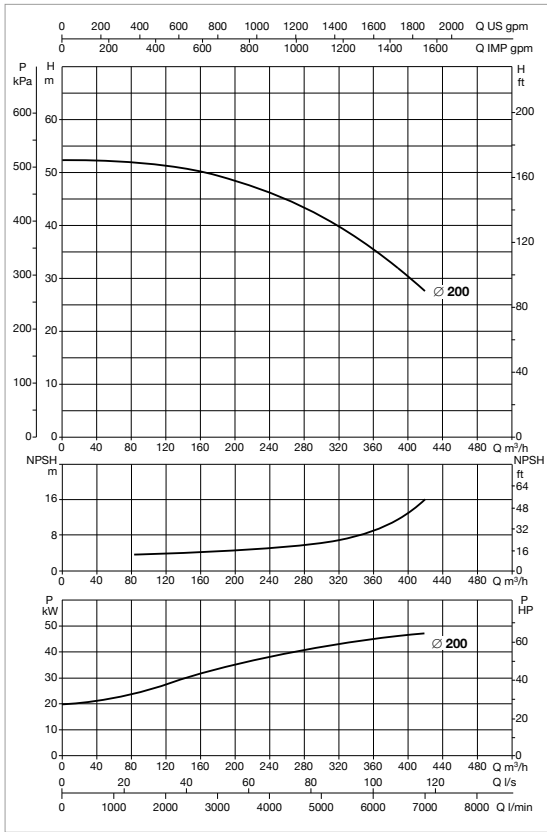

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 100-200/200 55	3 x 400 V ~	KVCX 65/80 T	55	2,2	95	KDN 100 EN 12845



KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP

MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 100-200/200 MD	3 x 230 / 400 V ~	KVCX 65/80 T	53	2,2	KDN 100 EN 12845	0,40 m²

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

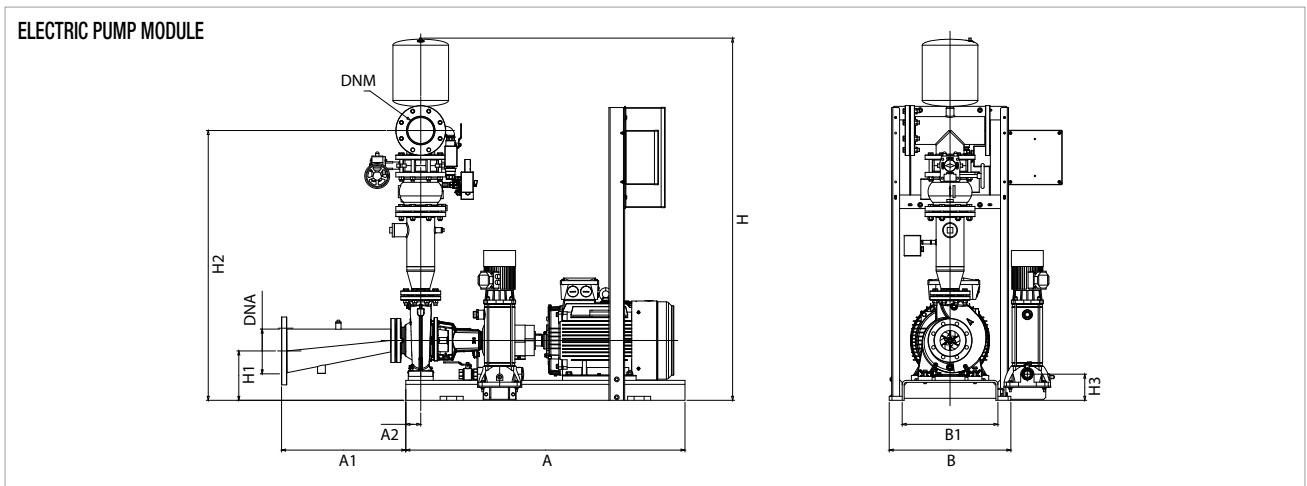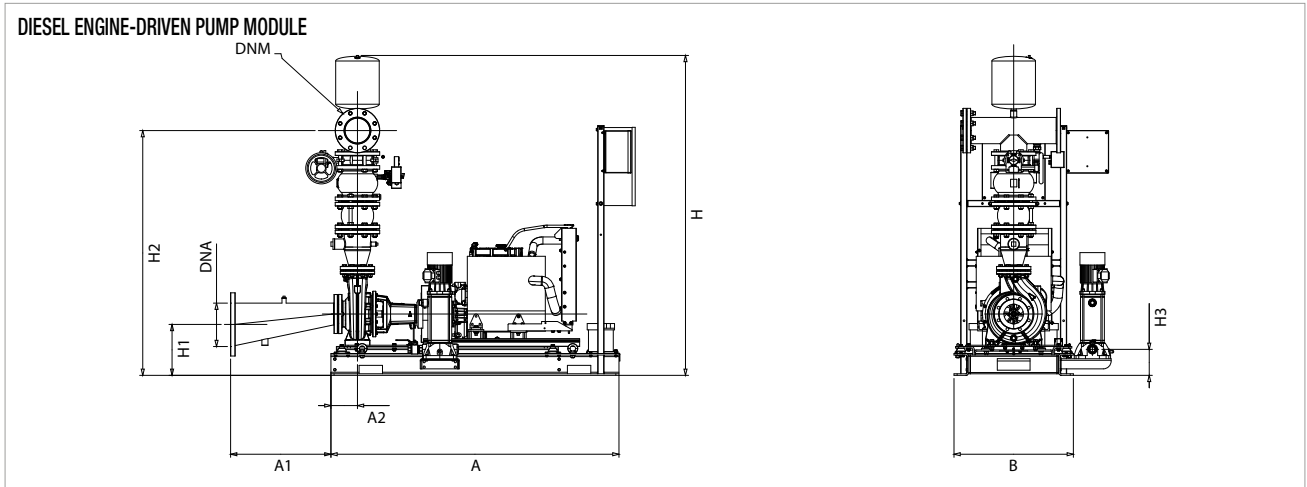


The dashed components are not included in the standard supply.

1 KDN 100-200/200 - UNI EN 12845 FIRE FIGHTING PUMPS SETS


2 ELECTRIC PUMP MODULES

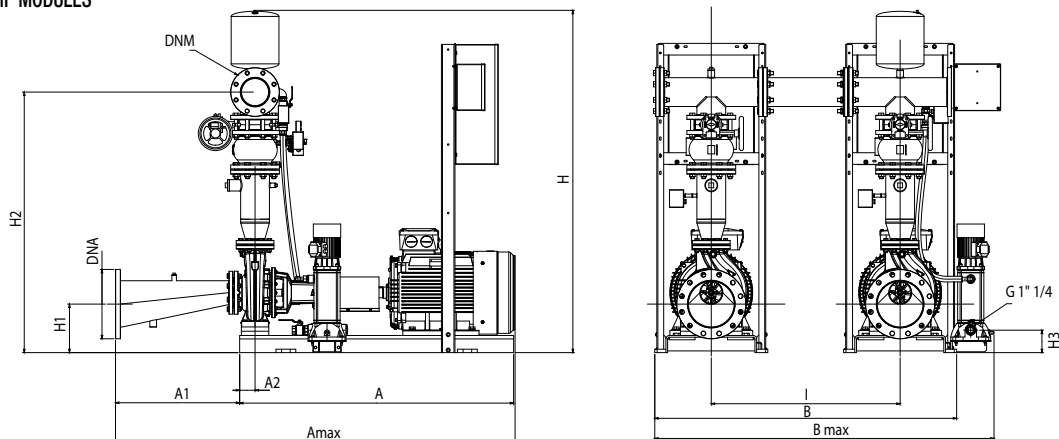

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP MODULE

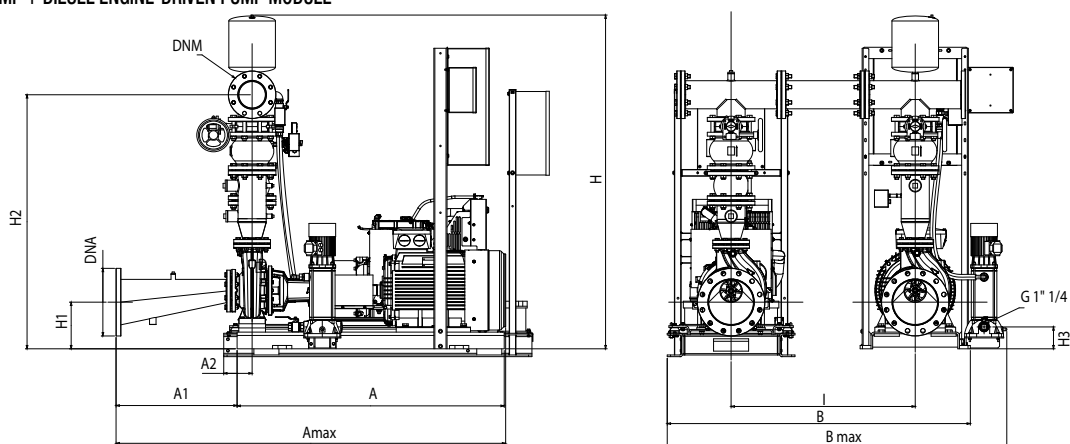

2 DIESEL ENGINE-DRIVEN PUMP MODULES

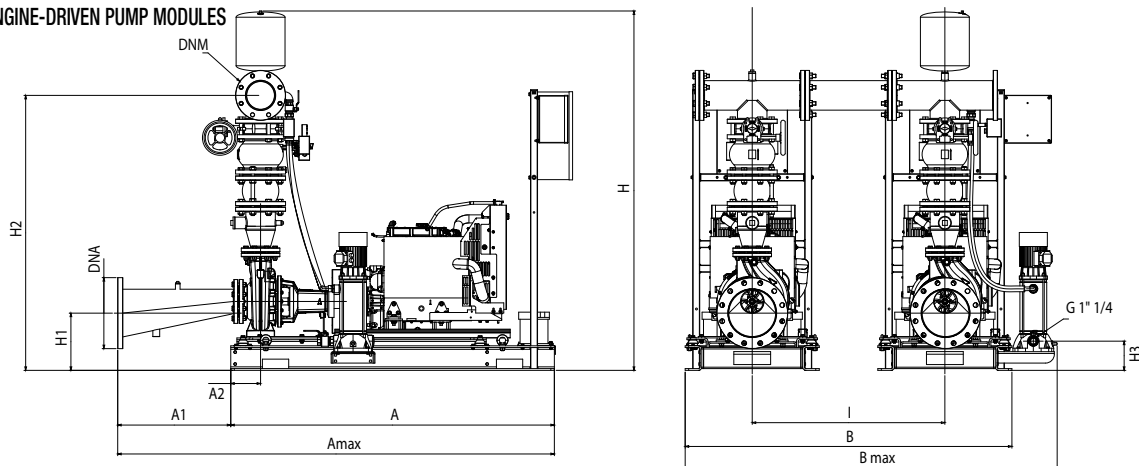


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 100-200/200 - DIESEL ENGINE DRIVEN PUMP MODULE	1846	643	170	2593	765	-	991	2029	328	1719	167	-	-	-	DN 250	DN 150	1076	1102
1 KDN 100-200/200 - ELECTRIC PUMP MODULE	1600	723	90	2332	720	600	917	2149	283	1672	131	-	-	-	DN 250	DN 150	1059	1085
1 KDN 100-200/200 - 2 ELECTRIC PUMP MODULES	1600	723	90	2332	1940	-	2137	2149	283	1672	131	-	-	1100	DN 250	DN 150	2118	2144
1 KDN 100-200/200 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1846	643	170	2593	-	-	2256	2149	328	1719	167	-	-	1100	DN 250	DN 150	2135	2161
1 KDN 100-200/200 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1846	643	170	2593	-	-	2256	2029	328	1719	167	-	-	1100	DN 250	DN 150	2152	2178

1 KDN 100-200/219 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

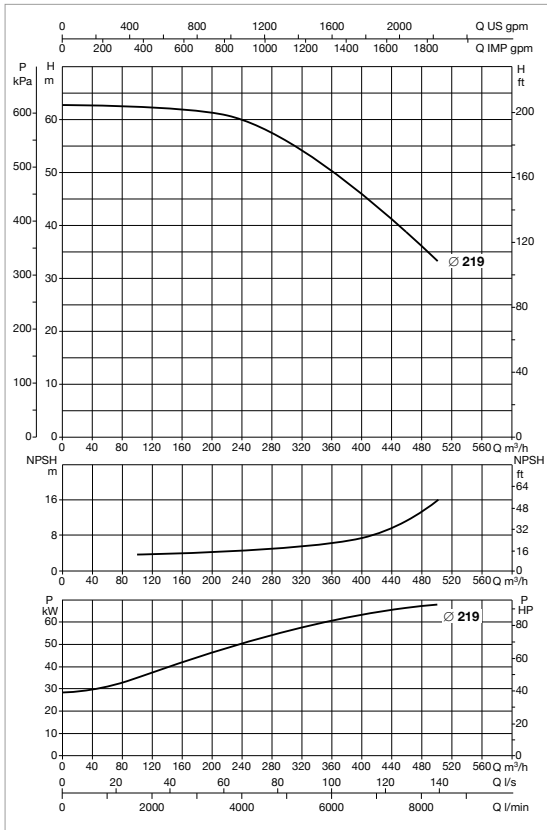

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 100-200/219 75	3 x 400 V ~	KVCX 65/80 T	75	2,2	124	KDN 100 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 100-200/219 MD	3 x 230 / 400 V ~	KVCX 65/80 T	73,5	2,2	KDN 100 EN 12845	0,40 m²

* Jockey pump on request.


** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE

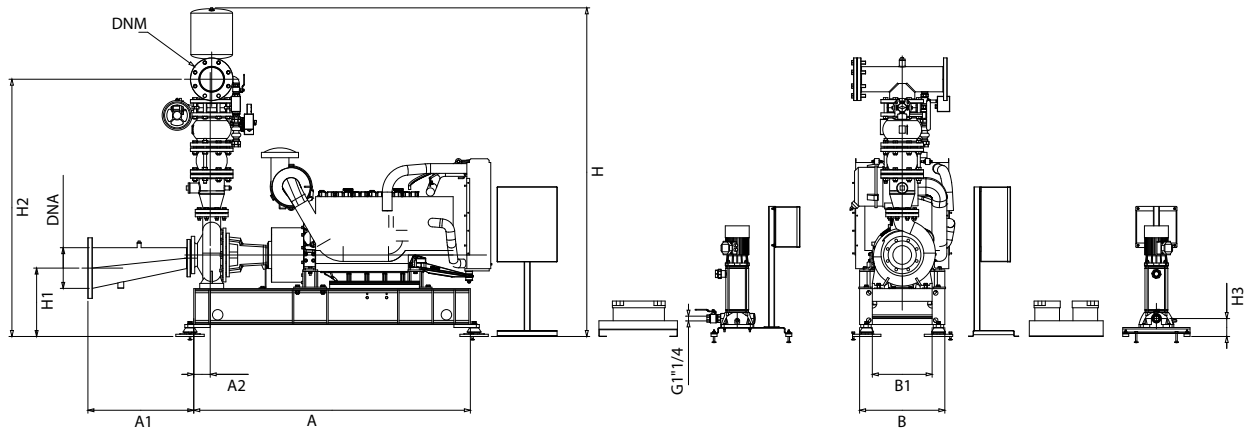


ELECTRIC PUMP MODULE

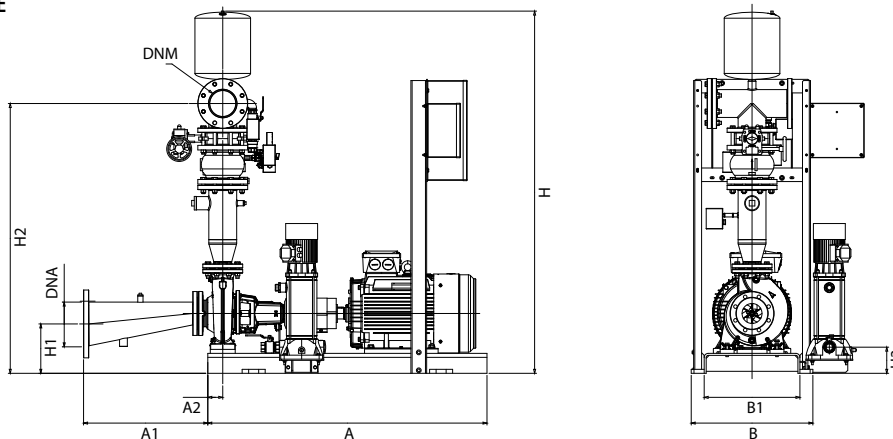


The dashed components are not included in the standard supply.

1 KDN 100-200/219 - UNI EN 12845 FIRE FIGHTING PUMPS SETS


2 ELECTRIC PUMP MODULES

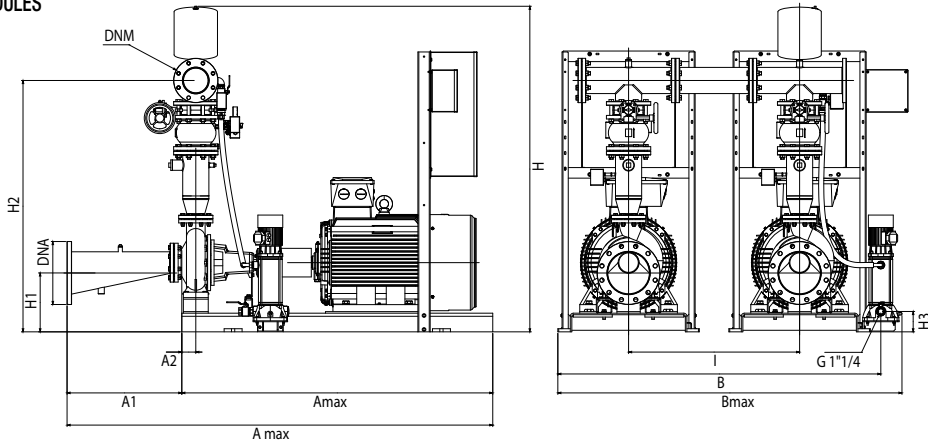

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP MODULE

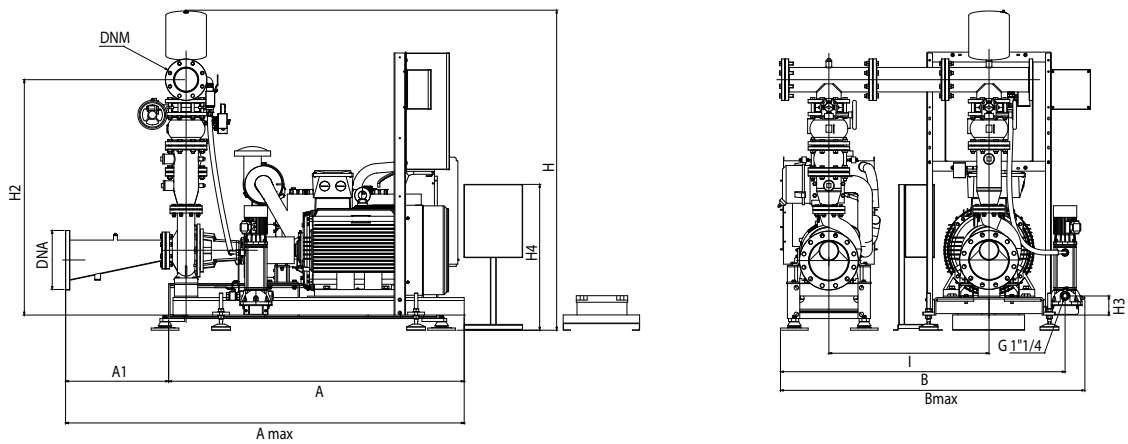

2 DIESEL ENGINE-DRIVEN PUMP MODULES

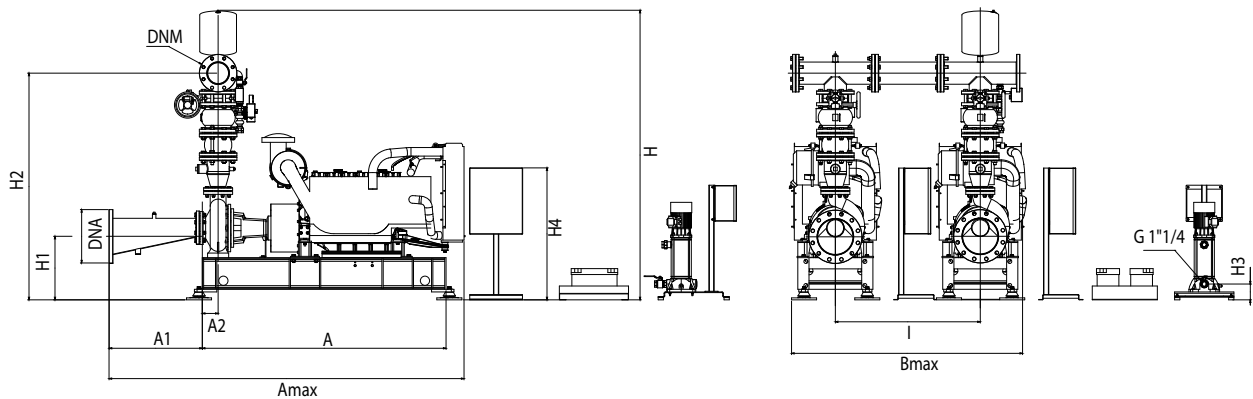


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 100-200/219 - DIESEL ENGINE DRIVEN PUMP MODULE	1626	703	110	2432	570	-	675	2323	620	1846	120	734	-	-	DN 250	DN 150	1372	1396
1 KDN 100-200/219 - ELECTRIC PUMP MODULE	1800	723	90	2523	730	600	987	2179	313	1702	131	734	-	-	DN 250	DN 150	1355	1379
1 KDN 100-200/219 - 2 ELECTRIC PUMP MODULES	1800	723	90	2523	1960	-	2217	2179	313	1702	131	734	-	1100	DN 250	DN 150	2710	2734
1 KDN 100-200/219 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1626	703	110	2432	-	-	1745	2323	620	1846	120	734	-	1100	DN 250	DN 150	2727	2751
1 KDN 100-200/219 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1626	703	110	2432	-	-	1745	2323	620	1846	120	734	-	1100	DN 250	DN 150	2744	2768

1 KDN 100-250/240 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

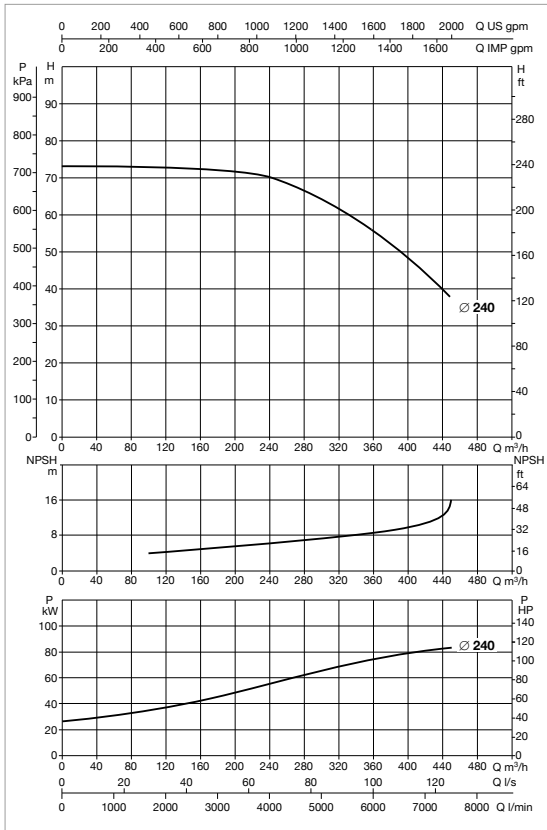

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 100-250/240 90	3 x 400 V ~	KVCX 65/80 T	90	2,2	148	KDN 100 EN 12845



KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP

MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 100-250/240 MD	3 x 230 / 400 V ~	KVCX 65/80 T	110	2,2	KDN 100 EN 12845	0,40 m ²

* Jockey pump on request.




** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

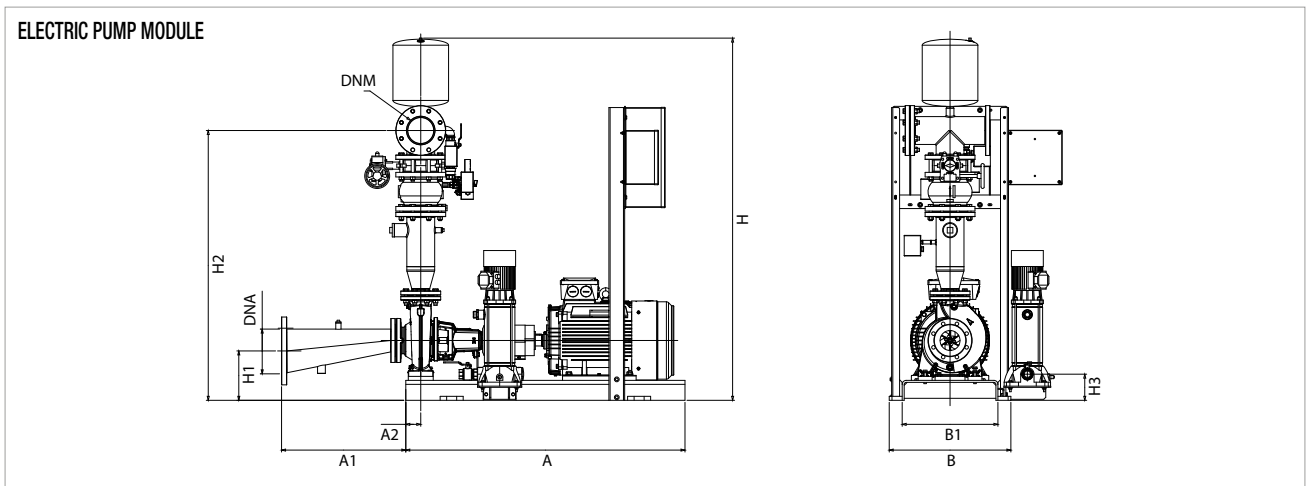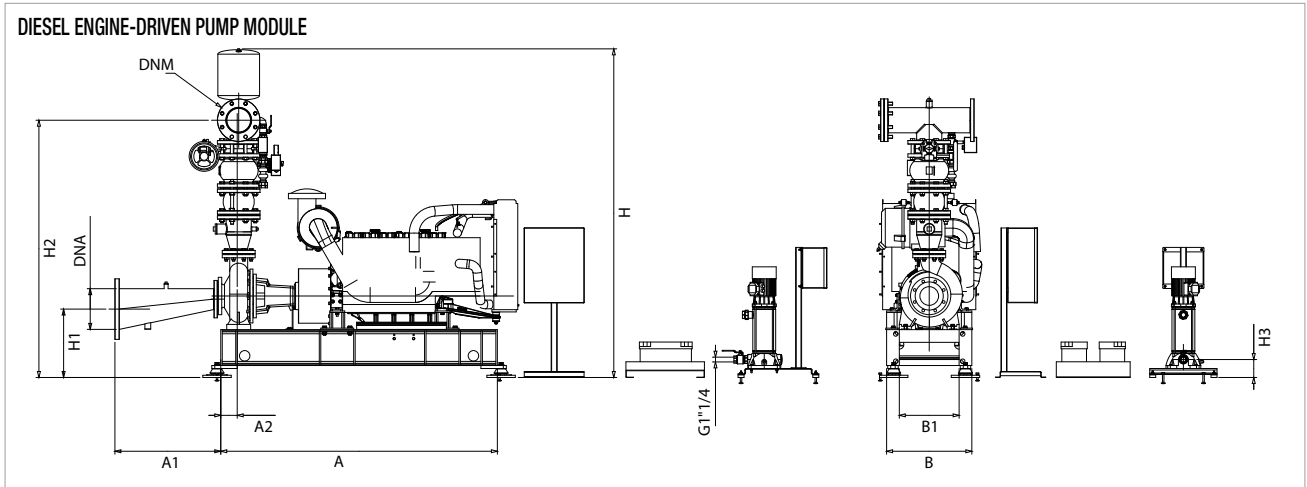

The dashed components are not included in the standard supply.

1 KDN 100-250/240 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

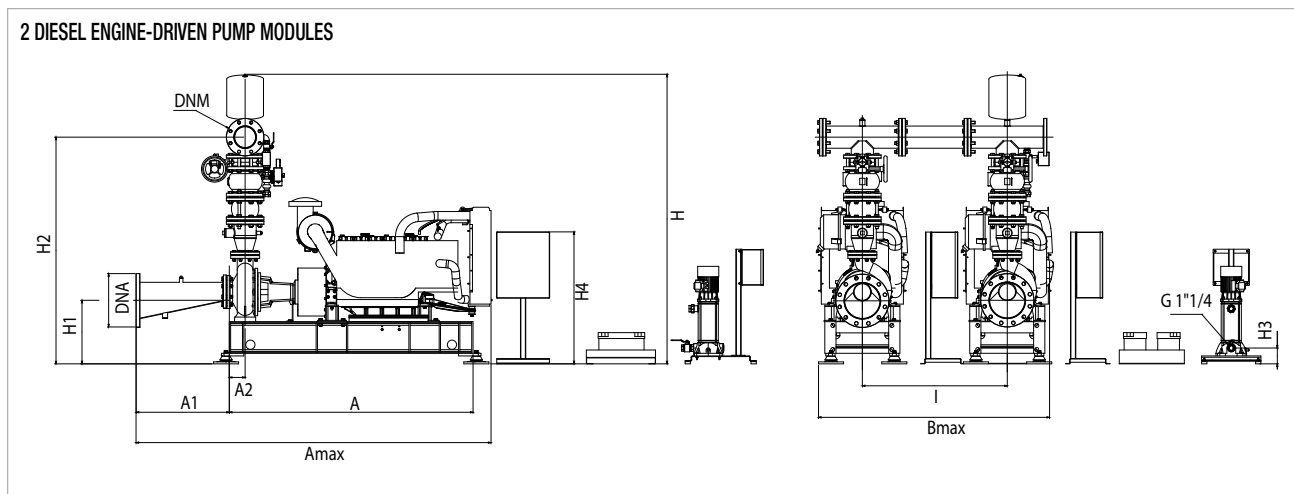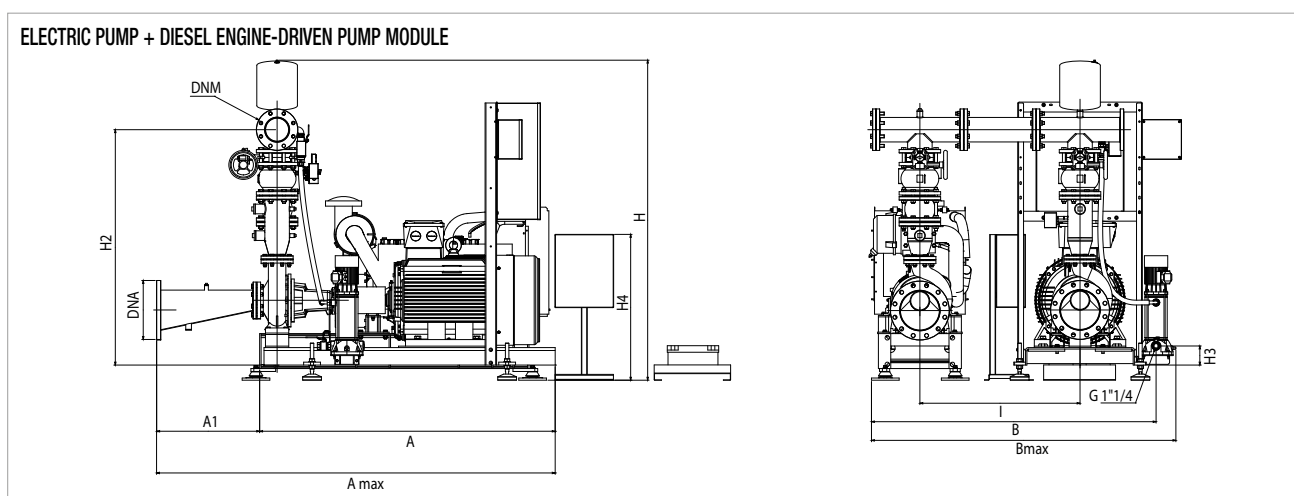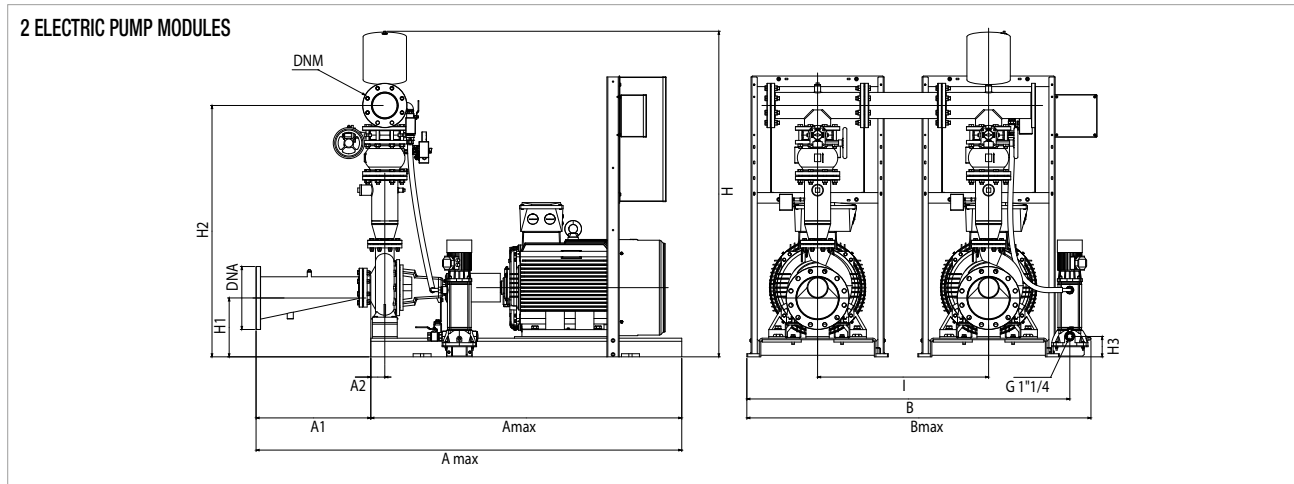


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DN	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 100-250/240 - DIESEL ENGINE DRIVEN PUMP MODULE	1850	708	110	2694	570	-	701	2348	460	1871	120	734	-	-	DN 250	DN 150	1377	1397
1 KDN 100-250/240 - ELECTRIC PUMP MODULE	1800	723	90	2538	730	600	897	2404	328	1707	131	734	-	-	DN 250	DN 150	1360	1380
1 KDN 100-250/240 - 2 ELECTRIC PUMP MODULES	1800	723	90	2538	1960	-	2217	2404	328	1707	131	734	-	1100	DN 250	DN 150	2720	2740
1 KDN 100-250/240 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1850	708	110	2694	-	-	1771	2404	460	1707	120	734	-	1100	DN 250	DN 150	2737	2757
1 KDN 100-250/240 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1850	708	110	2694	-	-	1771	2348	460	1871	120	734	-	1100	DN 250	DN 150	2754	2774

1 KDN 100-250/260 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

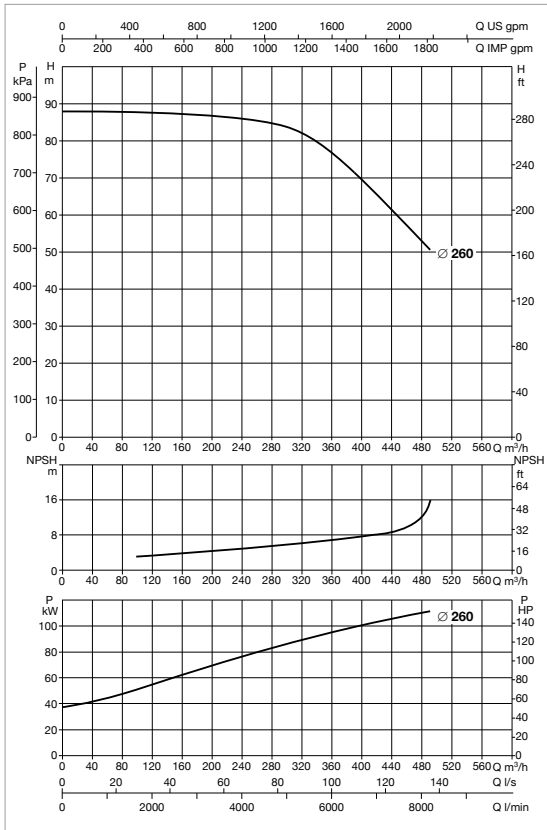

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 100-250/260 110	3 x 400 V ~	KVCX 65/80 T	110	2,2	184	KDN 100 EN 12845



KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP

MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGR - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 100-250/260 MD	3 x 230 / 400 V ~	KVCX 65/80 T	110	2,2	KDN 100 EN 12845	0,40 m²

* Jockey pump on request.




** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

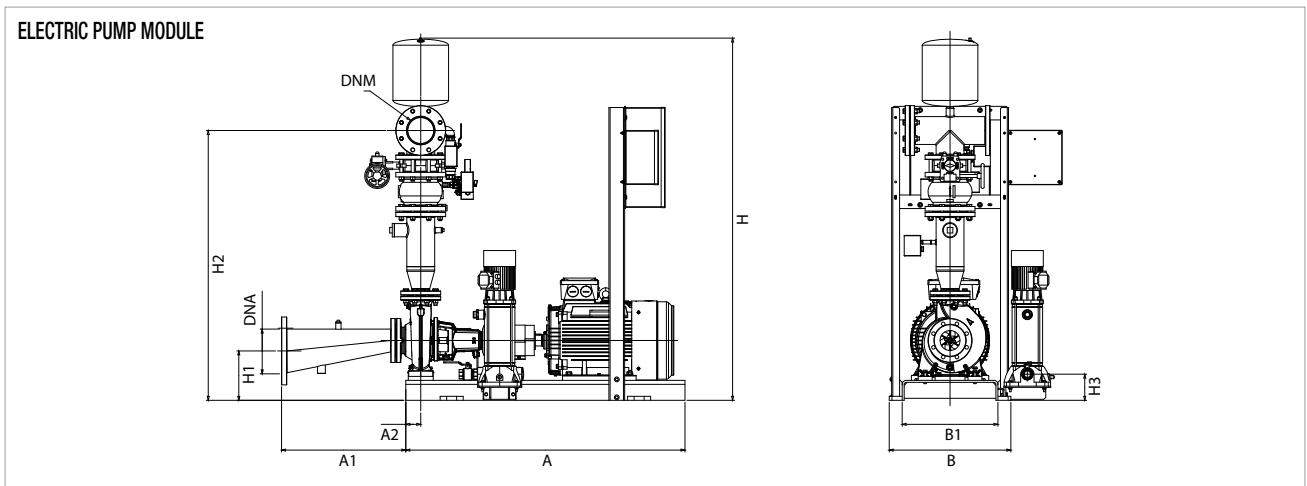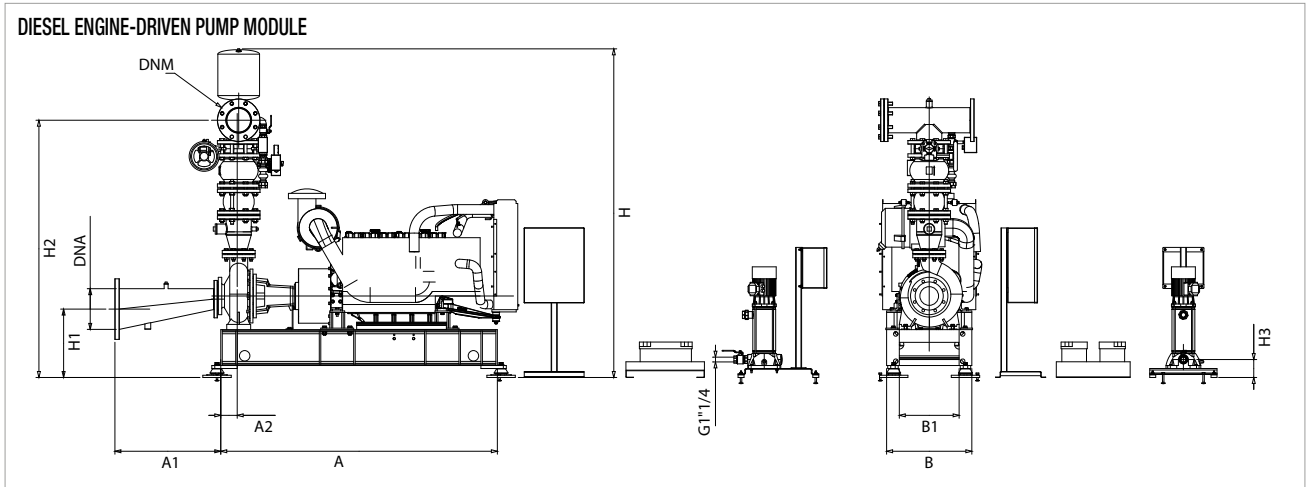

The dashed components are not included in the standard supply.

1 KDN 100-250/260 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

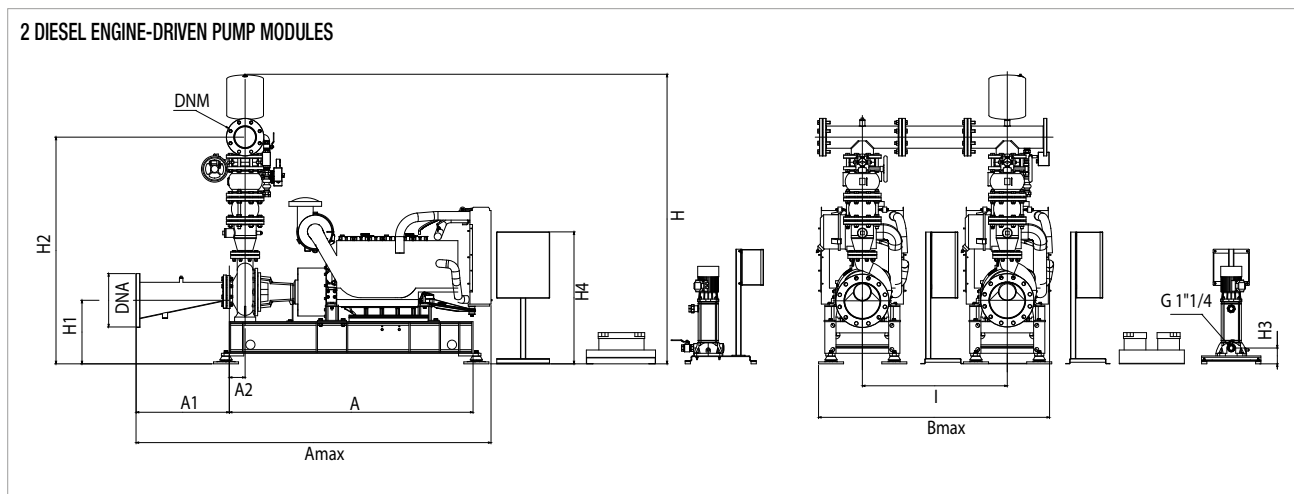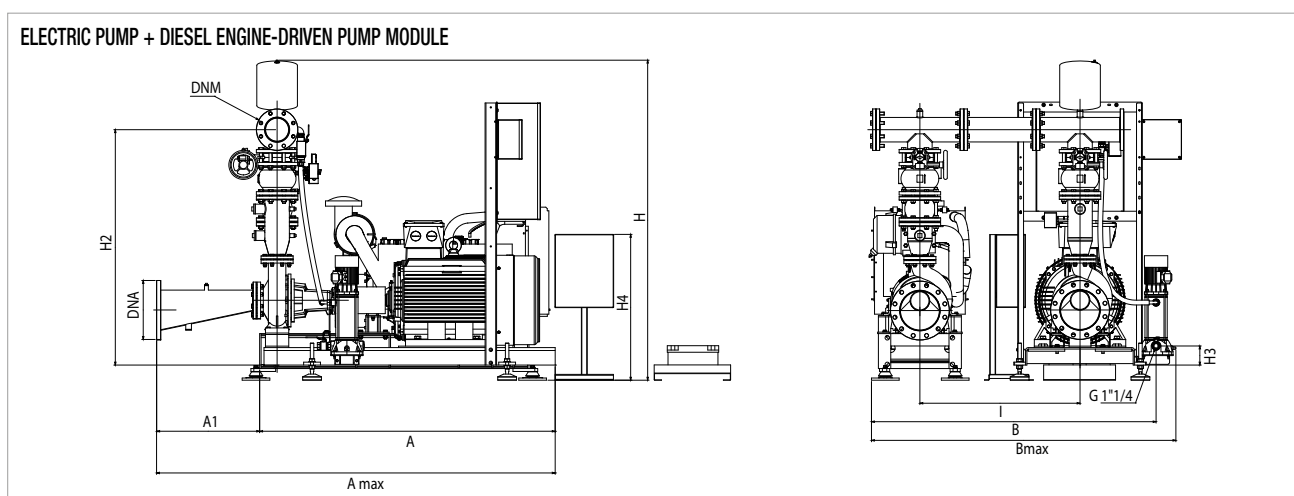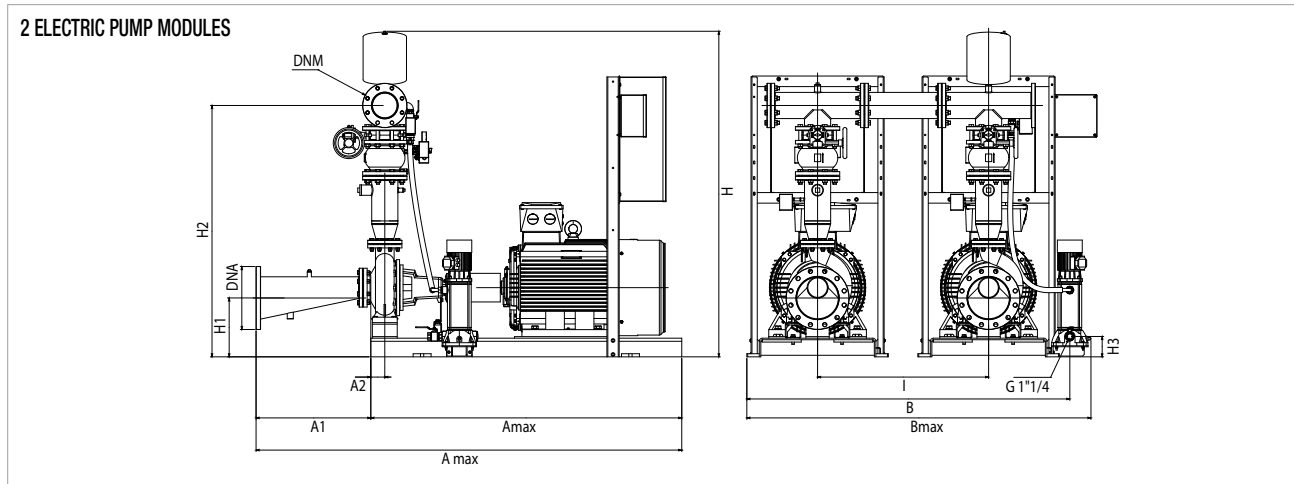


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 100-250/260 - DIESEL ENGINE DRIVEN PUMP MODULE	1850	708	110	2694	570	-	701	2348	460	1871	120	734	-	-	DN 250	DN 150	1402	1414
1 KDN 100-250/260 - ELECTRIC PUMP MODULE	2000	738	90	2738	910	750	1146	2404	378	1767	131	734	-	-	DN 250	DN 150	1385	1397
1 KDN 100-250/260 - 2 ELECTRIC PUMP MODULES	2000	738	90	2738	2320	-	2556	2404	378	1767	131	734	-	1100	DN 250	DN 150	2770	2782
1 KDN 100-250/260 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1850	708	110	2738	-	-	1771	2404	460	1767	120	734	-	1100	DN 250	DN 150	2787	2799
1 KDN 100-250/260 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1850	708	110	2694	-	-	1771	2348	460	1871	120	734	-	1100	DN 250	DN 150	2804	2816

1 KDN 125-250/235-264 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

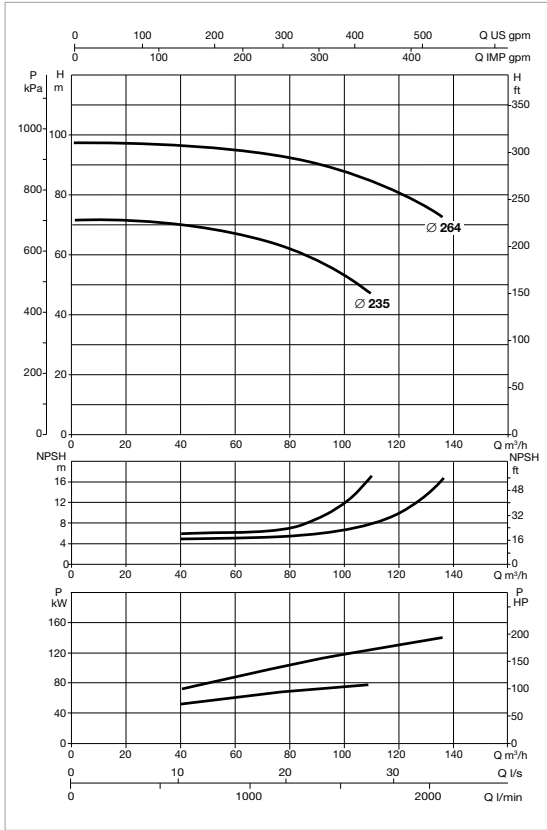

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 125-250/235 90	3 x 400 V ~	KV 3/12 T	90	1,5	148	KDN 125 EN 12845
1 KDN 125-250/264 160	3 x 400 V ~	KV 6/11 T	160	1,85	265	KDN 125 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 125-250/235 MD	3 x 230 / 400 V ~	KV 3/12 T	110	1,5	KDN 125 EN 12845	0,40 m²
1 KDN 125-250/264 MD	3 x 230 / 400 V ~	KV 6/11 T	145	1,85	KDN 125 EN 12845	0,40 m²

* Jockey pump on request.


** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE



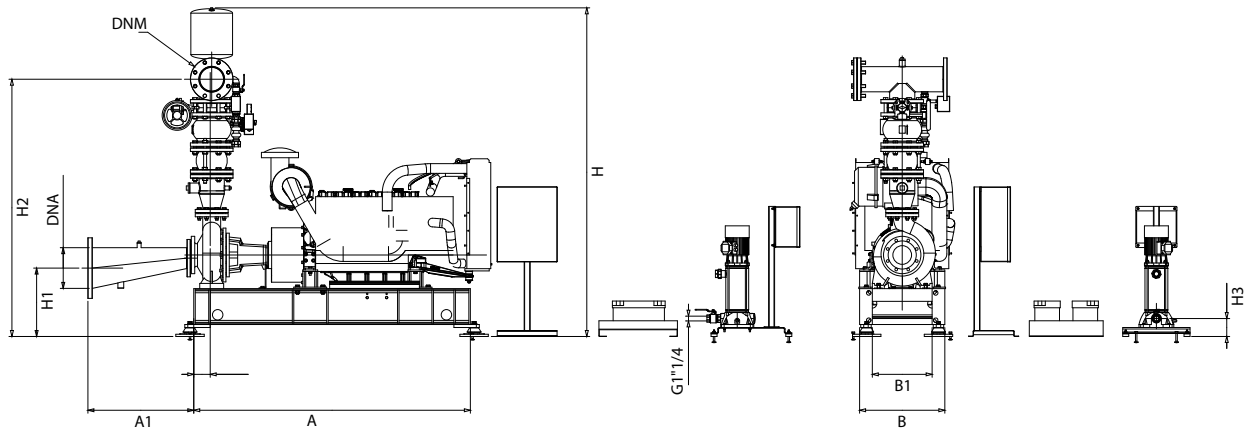


ELECTRIC PUMP MODULE

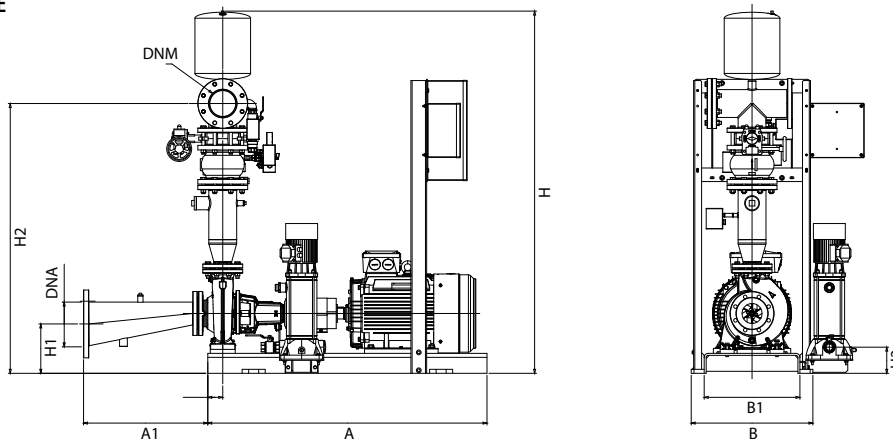

The dashed components are not included in the standard supply.

1 KDN 125-250/235-264 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

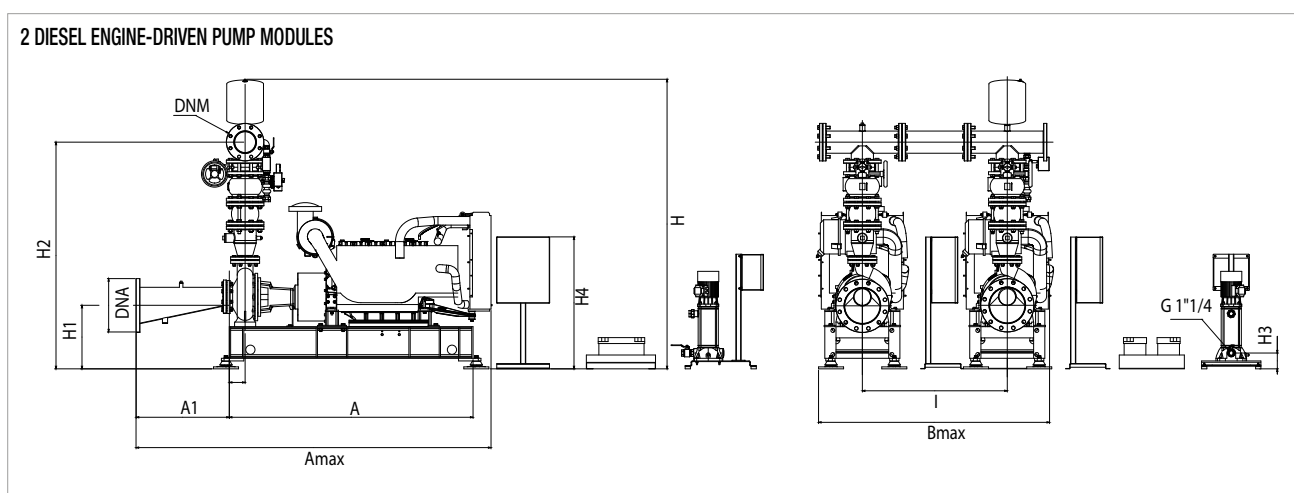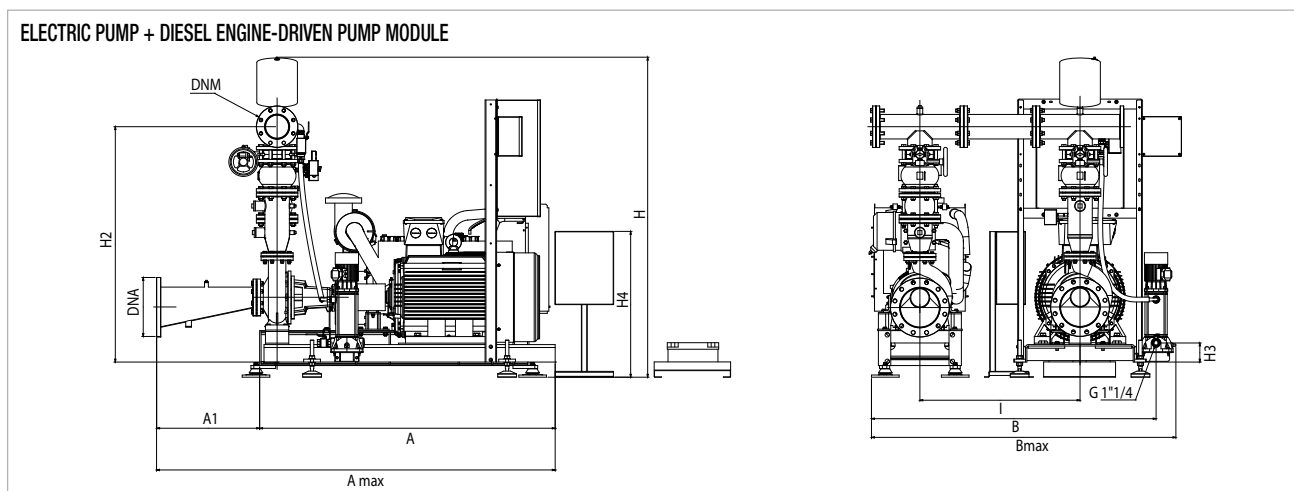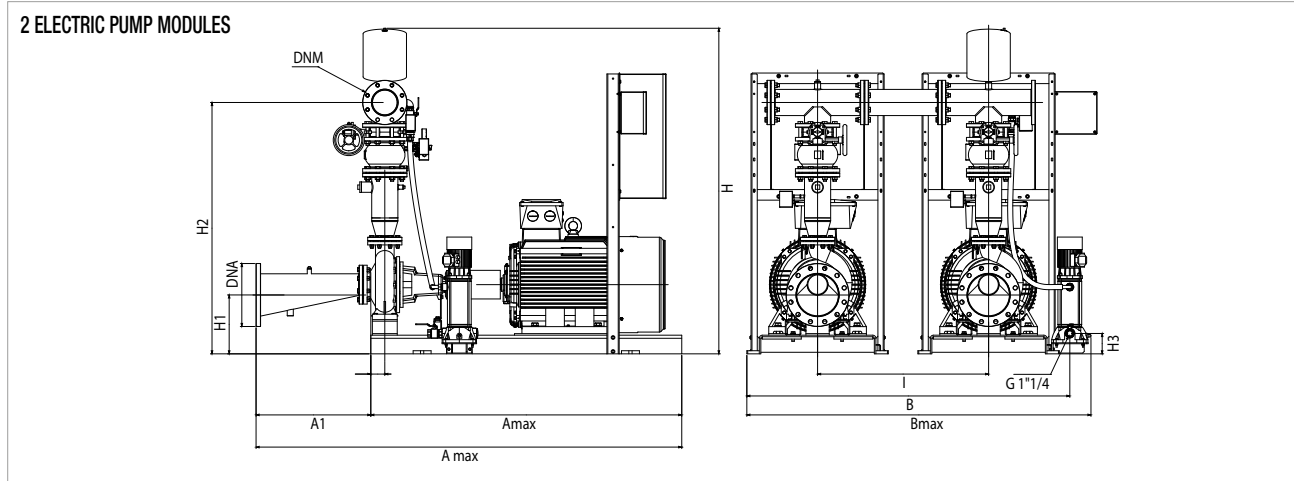


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 125-250/235-264 - DIESEL ENGINE DRIVEN PUMP MODULE	1900	500	-	2030	839	800	905	2330	460	2160	131	1195	-	-	DN 300	DN 200	723	753
1 KDN 125-250/235-264 - ELECTRIC PUMP MODULE	1800 1690	500	-	2139	730	600	1062	2380	380	1869	131	-	-	-	DN 300	DN 200	824	854
1 KDN 125-250/235-264 - 2 ELECTRIC PUMP MODULES	1800 1690	500	-	2139	1460	600	2137	2380	380	1869	131	-	-	1100	DN 300	DN 200	1648	1678
1 KDN 125-250/235-264 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1900	500	-	2030	1678	800	2256	2330	460	2160	131	1195	-	1100	DN 300	DN 200	1547	1577
1 KDN 125-250/235-264 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1900	500	-	2030	1678	800	2256	2330	460	2160	131	1195	-	1100	DN 300	DN 200	1446	1476

1 KDN 125-330/300 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

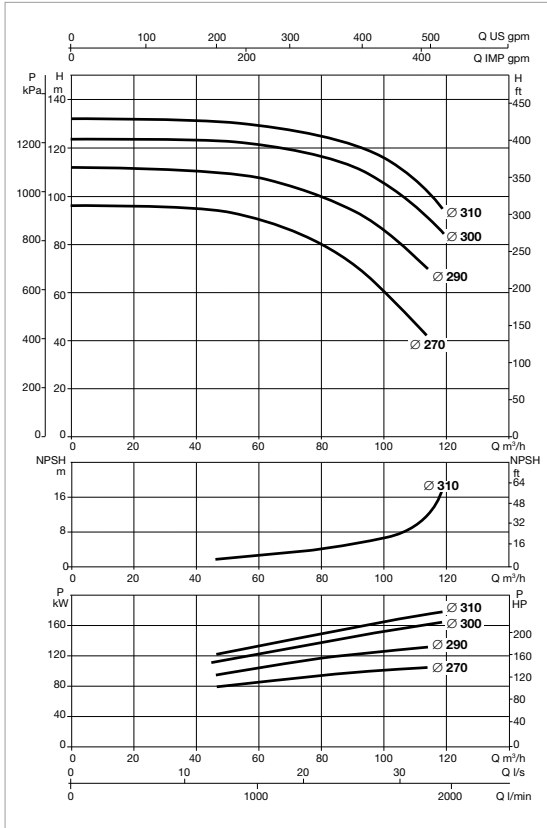

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 125-330/300 160	3 x 400 V ~	KV 3/15 T	160	1,85	265	KDN 125 EN 12845

KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 125-330/300 MD	3 x 230 / 400 V ~	KV 3/15 T	164	1,85	KDN 125 EN 12845	0,40 m²

* Jockey pump on request.


** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

DIESEL ENGINE-DRIVEN PUMP MODULE



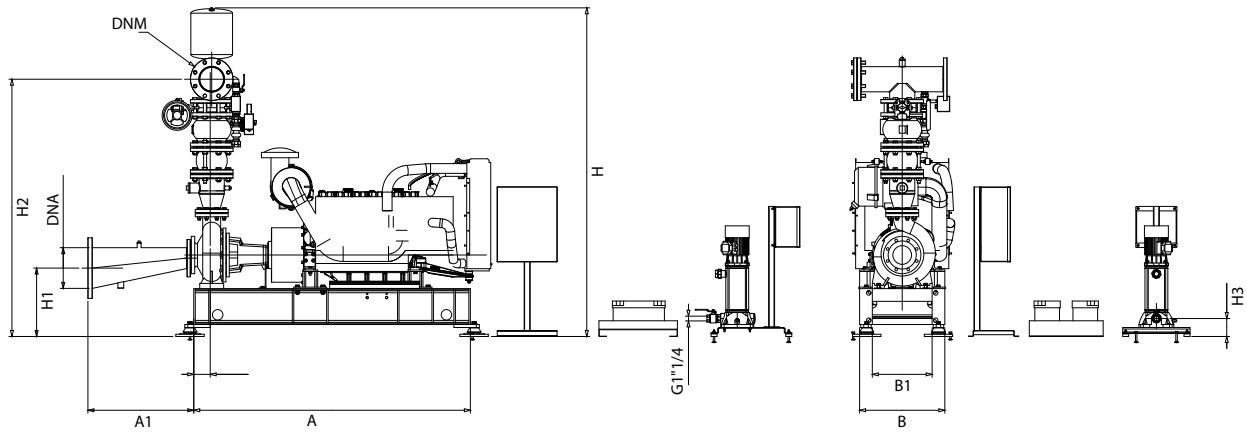


ELECTRIC PUMP MODULE

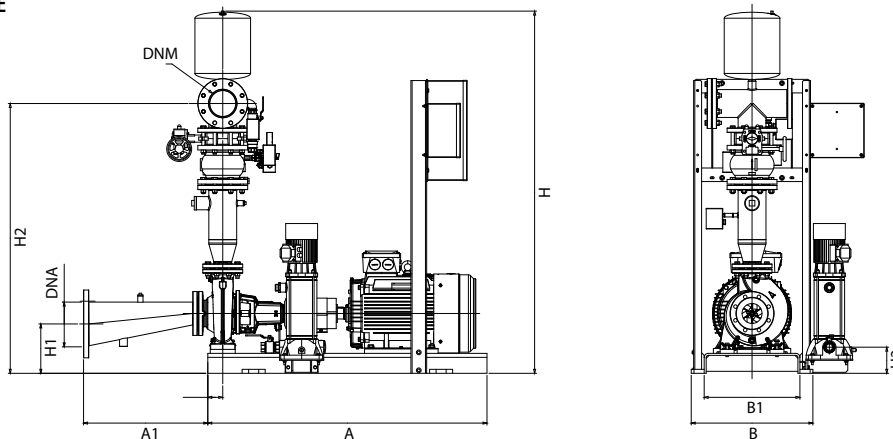

The dashed components are not included in the standard supply.

1 KDN 125-330/300 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

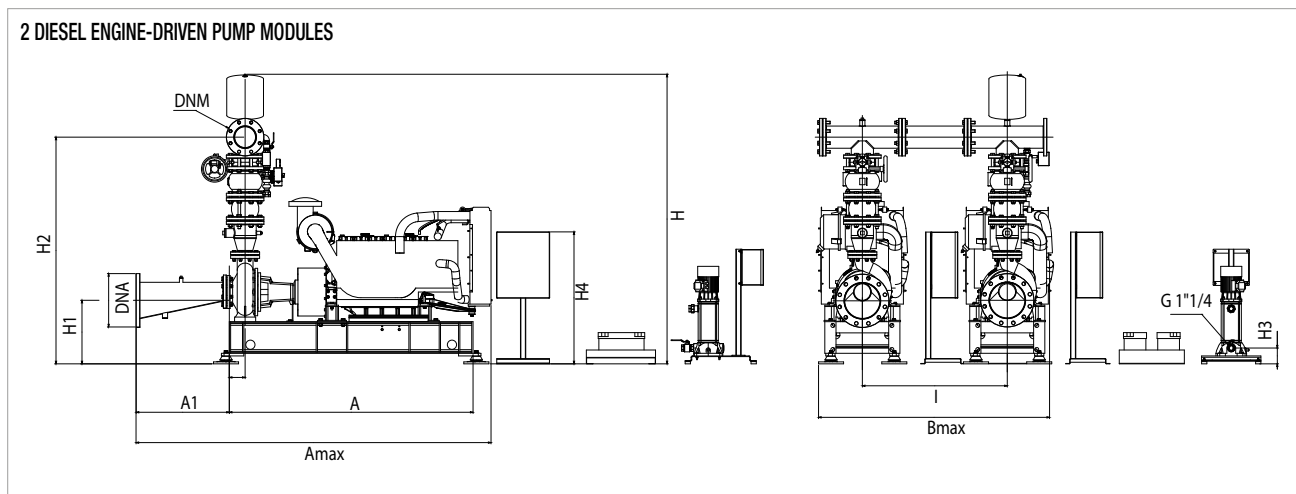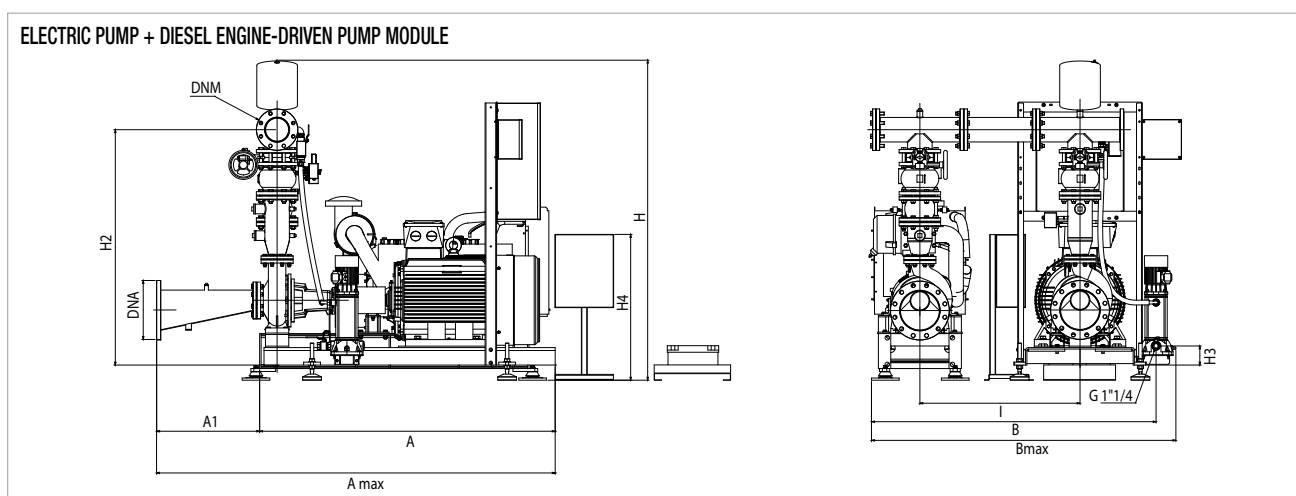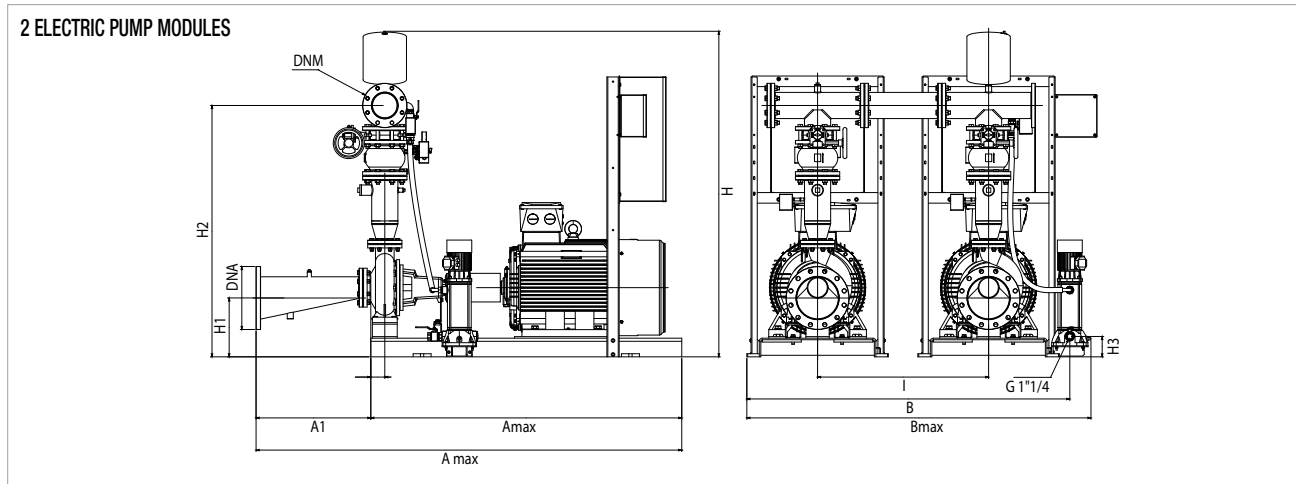


The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 125-330/300 - DIESEL ENGINE DRIVEN PUMP MODULE	1900	500	-	2030	839	800	905	2330	460	2160	131	1195	-	-	DN 300	DN 200	1320	1350
1 KDN 125-330/300 - ELECTRIC PUMP MODULE	1690	500	-	2419	800	680	905	2375	505	2204	131	1485	-	-	DN 300	DN 200	1700	1730
1 KDN 125-330/300 - 2 ELECTRIC PUMP MODULES	1690	500	-	2419	1940	680	2137	2375	505	2204	131	1485	-	1100	DN 300	DN 200	3400	3430
1 KDN 125-330/300 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	1900	500	-	2419	1940	800	2256	2375	505	2204	131	1485	-	1100	DN 300	DN 200	3020	3050
1 KDN 125-330/300 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	1900	500	-	2030	1940	800	2256	2330	460	2160	131	1195	-	1100	DN 300	DN 200	2640	2670

1 KDN 150-250/264 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C

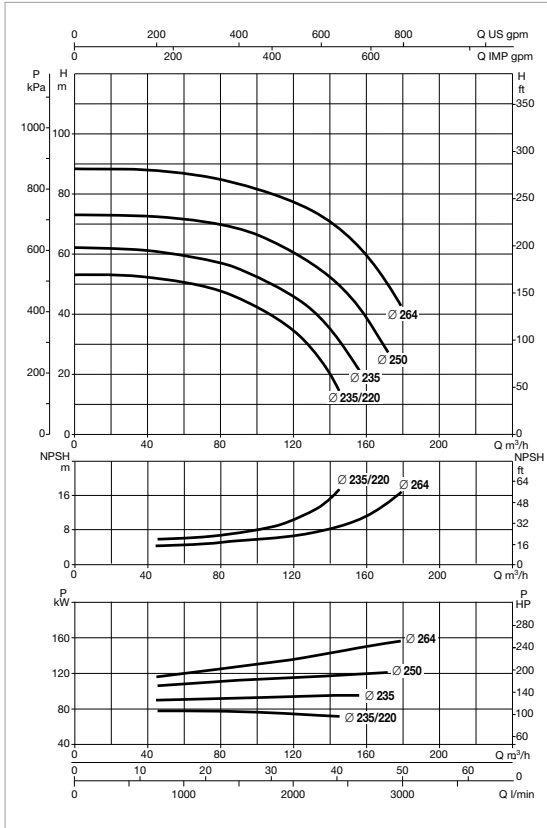

KDN EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	MEASURING KIT
			kW	kW		
1 KDN 150-250/264 160	3 x 400 V ~	KV 6/11 T	160	1,85	265	KDN 150 EN 12845



KDN EN 12845 DIESEL ENGINE-DRIVEN PUMP

MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE - DRIVEN PUMP	P2 JOCKEY PUMP	MEASURING KIT	FAN SURFACE
			kW	kW		
1 KDN 150-250/264 MD	3 x 230 / 400 V ~	KV 6/11 T	164	1,85	KDN 150 EN 12845	0,40 m²

* Jockey pump on request.




** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

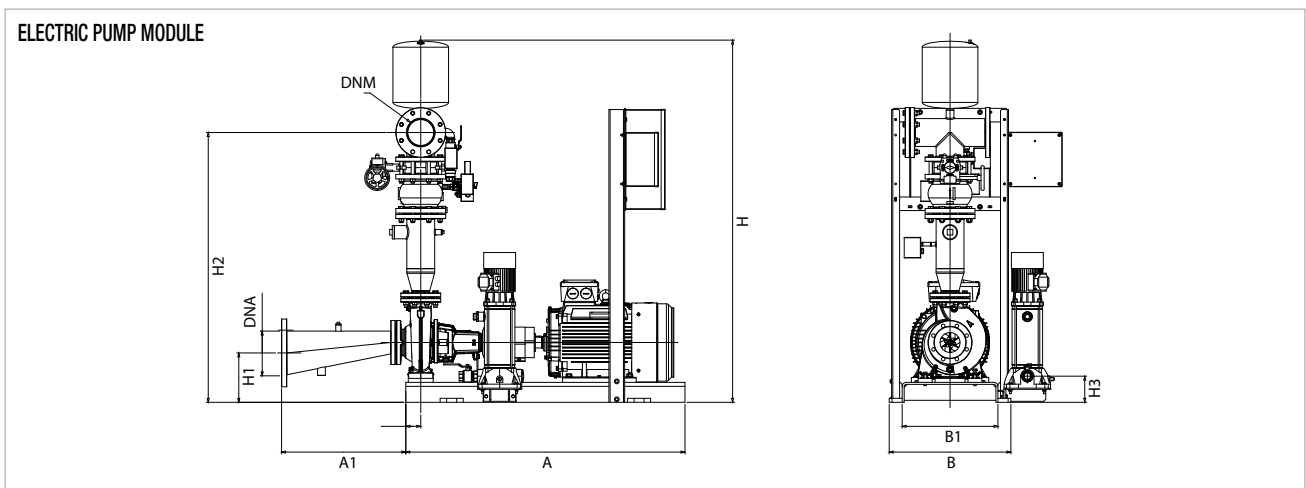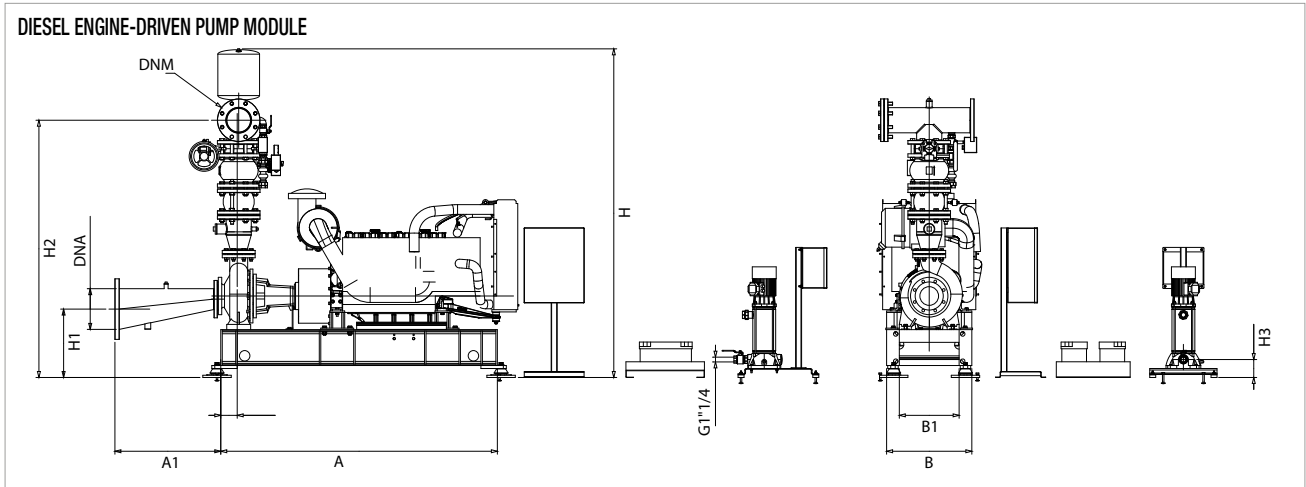

The dashed components are not included in the standard supply.

1 KDN 150-250/264 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

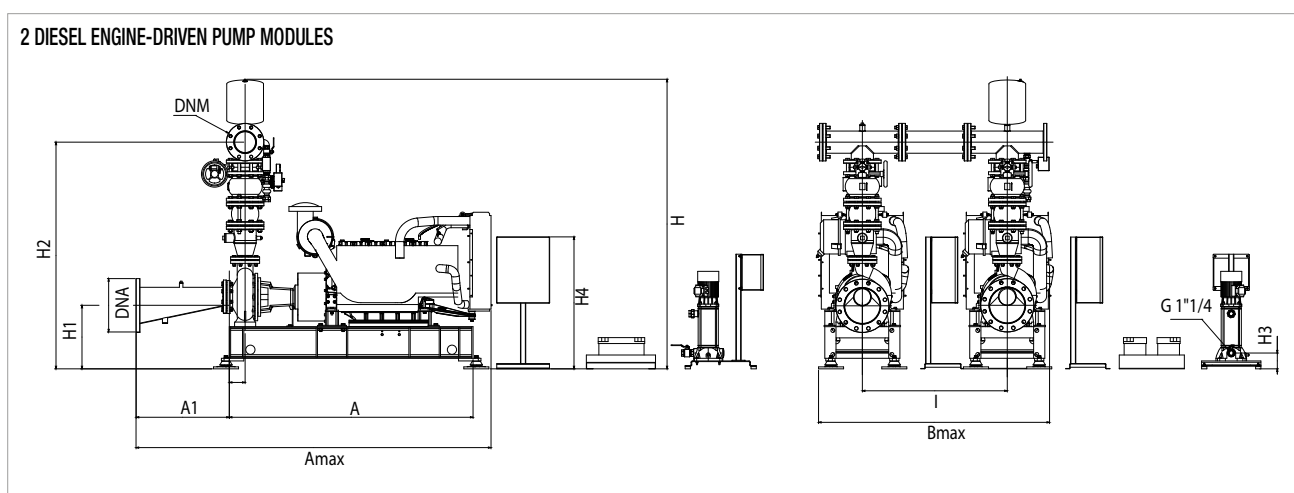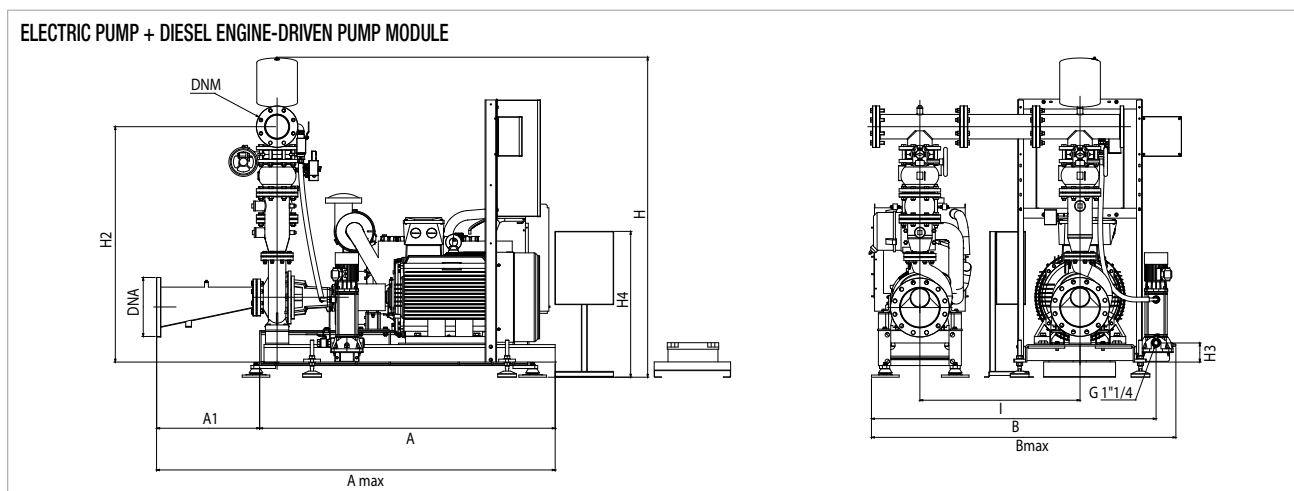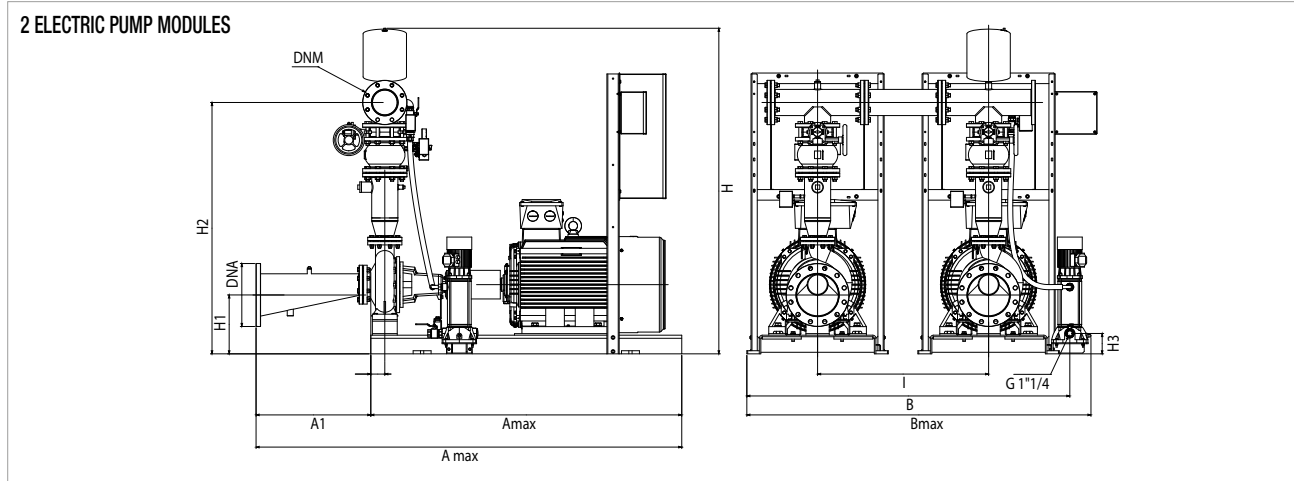

The dashed components are not included in the standard supply.

MODEL	A	A1	A2	A max	B	B1	B max	H	H1	H2	H3	H4	H5	I	DNA	DNM	WEIGHT without jockey pump kg	WEIGHT with jockey pump kg
1 KDN 150-250/264 - DIESEL ENGINE DRIVEN PUMP MODULE	2030	465	-	2490	839	800	905	2426	466	2257	131	1195	-	-	DN 350	DN 200	1480	1510
1 KDN 150-250/264 - ELECTRIC PUMP MODULE	1750	513	-	2618	800	680	839	2765	466	2257	131	1485	-	-	DN 350	DN 200	1771	1801
1 KDN 150-250/264 - 2 ELECTRIC PUMP MODULES	1750	513	-	2618	800	680	2137	2765	466	2257	131	1485	-	1100	DN 350	DN 200	3542	3572
1 KDN 150-250/264 - ELECTRIC PUMP + DIESEL ENGINE DRIVEN PUMP MODULE	2030	465	-	2490	839	800	2256	2426	466	2257	131	1195	-	1100	DN 350	DN 200	3251	3281
1 KDN 150-250/264 - 2 DIESEL ENGINE DRIVEN PUMP MODULES	2030	465	-	2490	839	800	2256	2426	466	2257	131	1195	-	1100	DN 350	DN 200	2960	2990

UNI EN 12845 FIRE-FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH VERTICAL TURBINE PUMPS



TECHNICAL DATA

Operating range: 4 to 300 m²/h

Pumped liquid: clean, free of solids and abrasives, non-viscous, non-aggressive, non-crystallised and chemically neutral, with properties similar to water

Pumped liquid temperature range: from 0 to 40 °C

Maximum ambient temperature: + 40°C

Maximum operating pressure: 16 bar (1600kPa) PN16

Special executions on request:

diesel version with water/water heat exchanger, 230 three-phase 50 or 60 Hz electric versions, non standard performance

APPLICATIONS

The new 1KVT fire-fighting pump sets with diesel engine or electric motor assembly, ideal for automatic sprinkler systems and/or hydrants of commercial buildings, are manufactured using vertical turbine pumps, in accordance with article 10.6.1 of UNI EN 12845 standards.

- **Simple Maintenance:** Thanks to the submersible pump body and the motor assembly control above the surface, they eliminate any self-priming issues, in addition to making the job of the maintenance technician much easier.
- **Modular design:** DAB pressurisation sets are designed to be coupled with each other, in order to obtain all the versions and meet all the requirements of the UNI EN 12845 standard.

Available set models:

- **1 KVT EN**, consisting of an axial flow submersible pump (vertical turbine pump) with electric motor, including submersible pump, cork plug, control head installed on appropriate base, electric control panel.
- **1 KVT MD EN** consisting of an axial flow submersible pump (vertical turbine pump) with air or radiator cooled diesel engine (exchanger on request), including submersible pump, cork plug, control head installed on appropriate base, electric control panel, diesel tank ensuring 6 hours of operation, with fuel collection tank for powers up to 26 kW

Jockey pump and axis lines supplied as separate accessories.

CONSTRUCTION FEATURES OF THE UNI EN 12845 FIRE-FIGHTING PUMP SET

The 1KVT range includes sets with axial flow vertical submersible pumps (for powers up to 75 kW), treated with black cathodolysis paint coating, which ensures extremely high resistance to corrosion. The control heads, base, frame, hydraulic column and manifolds are painted RAL3000 red. The set is pre-assembled on a RAL3000 red painted steel base supporting the control head, the motor or engine, and the electric control panel. The control head is coupled by means of a spacer elastic coupling to an electric motor or diesel engine capable of providing the power absorbed by the pump at any pump load condition, from no-load, to a load equal to NPSH16m (as requested by section 10.1 of the UNI EN 12845 standard).

The UNI EN 12845 DAB fire-fighting sets are supplied in modular version. This setup facilitates transport, and the installation of DAB fire-fighting pump sets in pump rooms, even with narrow access doors. Thanks to a coupling kit (supplied as accessory), it is possible to obtain all the compositions contemplated by the standard (one, two, or three electric or Diesel pumps, with or without jockey pump).

Each module has a serial number with its own declaration of conformity, and its own installation and maintenance manual.

Specific characteristics of the Diesel engine-driven pump

Diesel engine-driven pump sets have a vibration dampening system that reduces the amount of the vibrations produced by the Diesel engine reaching the system. This consists of rubber anti-vibration feet and couplings. Each Diesel engine-driven pump includes two start-up batteries and a Diesel tank providing 6 hours of continuous operation. A diesel collection tank is included for powers up to 26 kW, to contain any fuel spillages. The Diesel engine has an air/air cooling system for low powers (up to 26 kW), and air/water cooling system for higher powers (37 kW and over). The Diesel engine can operate continuously at full load in accordance with ISO 3046 standards, curve NA (section 10.9.1 of UNI EN 12845).

Engine-driven pumps with water/water heat exchanger cooling system are also available on request, for powers starting from 37 kW.

Main characteristics

- Axial flow vertical submersible pump (vertical turbine), with cork plug, to be coupled with an electric motor or diesel engine through a control head installed on appropriate base.
 - Electric motor or diesel engine capable of providing the power used by the pump at a 16 metre NPSH value.
- Each diesel engine driven pump has a diesel tank that guarantees 6 hours of operation. For engine powers up to 26 kW, a collection tank is also included (in compliance with UNI 11292), for the containment of any fuel spillages.
- Axis line. This is a separate accessory, which must be installed between the vertical submersible pump and the control head above the surface. The price list includes 6 standard lengths for each axis line (0.5 - 0.75 - 1.0 - 1.5 - 2.0 - 2.5 - 3.05 m), with other lengths available on request. The DIVER or JET series jockey pump is a separate accessory supplied complete with 20 l expansion vessel, and its own electric control panel.
 - Delivery column, sized to limit the maximum speed in accordance with UNI EN 12845 13.2.3
 - Inspectable non-return valve and shut-off valve before the delivery manifold.
 - The diesel engine driven pump version includes engine speed detection by a pick-up sensor

ELECTRIC PUMP CONTROL PANEL

UNI EN 12845 FIRE-FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH VERTICAL TURBINE PUMPS



TECHNICAL DATA

Nominal power input voltage: 400V +/- 5%

Phases: 3

Frequency: 50-60Hz

Number of pumps that can be connected: 1

Maximum nominal power of use:

from 3 to 110 kW (depending on model)

Maximum nominal current of use: from 10 Amp to 250 Amp

Ambient temperature operation limits: from +4 °C to +40 °C

Relative humidity (without condensation):

50 % at 40 °C MAX (90 % at 20 °C)

Max. altitude: 3000 m (asl)

Protection class: IP55

Control panel construction:

According to EN60204, EN 60439-1, and UNI EN 12845/10779

COMPONENTS

The control and protection panel includes the following components

INTERIOR OF CABINET

Connector for the powering of a GSM Modem (230 V, protected by fuse).

Motor protection fuses (aM type); current surge relay-motor protectors are not permitted by the standard.

Auxiliary circuit protection fuses (Gg type).

Direct pump starters (up to 7,5 kW).

Star/triangle starters (11 kW and over).

24 V auxiliary circuit transformers.

Alarm relay with terminal box for remote status control (as required by the UNI EN 12845 standard).

System start-up input connection terminal box.

ON FRONT PANEL

Electric pump control unit with:

Multifunction instrument with display (voltmeter, ammeter, cosfi metre, wattmeter, alarms and status).

Start and stop pushbuttons.

Status and alarm notification lamps.

Alarm/notification lamp test pushbutton.

0 - 1 selector (0 = automatic disabled; 1 = automatic on), key removable only for position one (AUTOMATIC ON).

REMOTELY CONTROLLED ALARMS:

Voltage present.

Phase sequence.

Pump start request from the pressure switches.

Pump start request from priming tank.

Pump in operation.

Start failed.

The above alarms can be remotely controlled in the following ways:

With relay wiring to the CSR-1 control panel.

With RS-485 wiring to the CSR-1 control panel.


With GSM Modem in the CSR-1 control panel, for forwarding status and/or alarm signals SMS (optional).

ELECTRIC PUMP CONTROL PANEL

UNI EN 12845 FIRE-FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH VERTICAL TURBINE PUMPS

ELECTRIC PUMP CONTROL UNIT

The A1 electronic control unit supplied with the control panel offers the following features: automatic start from the pressure switches or the priming float switch, manual start, automatic monitoring of pump set faults and incorrect or unavailable power input voltage.

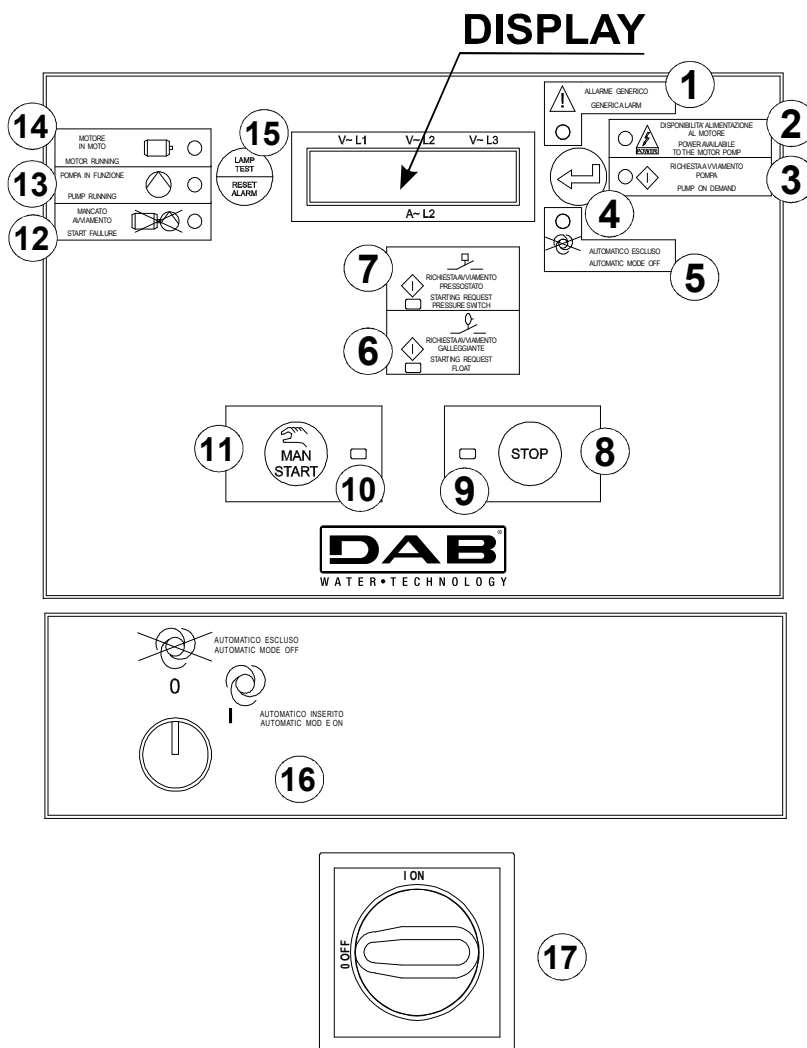

**ALIMENTAZIONE DELLA POMPA SPRINKLER
NON SPEGNERE IN CASO DI INCENDIO**

**SPRINKLER PUMP MOTOR SUPPLY
NOT TO BE SWITCHED OF IN THE EVENT OF FIRE**

REF.	FUNCTION
1	LAMP - Generic alarm
2	LAMP - Power input to the motor detected
3	LAMP - Pump START request
4	Press to display the instruments
5	LAMP - Automatic start disabled
6	LAMP - START request from the priming tank float switch
7	LAMP - START request (call) from the pressure switches
8	MANUAL STOP pushbutton
9	LAMP - MANUAL STOP with STOP pushbutton notification

REF.	FUNCTION
10	LAMP - MANUAL START with MAN START pushbutton notification
11	MANUAL START pushbutton
12	LAMP - Start failed
13	LAMP - ELECTRIC PUMP RUNNING with motor running; detected by the electric pump running pressure switch
14	LAMP - MOTOR RUNNING; controlled by the ammeter detection
15	Reset lamp test pushbutton
16	Automatic mode disabling selector
17	Power input disconnection switch

DIESEL PUMP CONTROL PANEL

UNI EN 12845 FIRE-FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH VERTICAL TURBINE PUMPS



TECHNICAL DATA

Nominal power input voltage: 230 V +/- 5%

Phases: 1+N

Frequency: 50-60 Hz

Number of pumps that can be connected: 1

Maximum nominal power of use:

from 7,5 to 197 kW (Diesel motor power)

Nominal power absorbed by the users:

approximately 790 W (3 Amp) at full load, 16 Amp power input line

Ambient temperature operation limits: from +4 °C to +40 °C

Relative humidity (without condensation):

50 % at 40 °C MAX (90 % at 20 °C)

Max. altitude: 3000 m (asl)

Protection class: IP55

Control panel construction:

According to EN60204, EN 60439-1, and UNI EN 12845/10779

DIESEL PUMP CONTROL PANEL

COMPONENTS

The control and protection panel includes the following components

INTERIOR OF CABINET

Connector for the powering of a GSM Modem (12 V, protected by fuse).

Auxiliary circuit protection fuses (Gg type).

2 x 12 V Diesel engine start relays (for 12 V starter motors with powers up to 145 kW).

2 x 24 V Diesel engine start relays (for 24 V starter motors with powers over 145 kW).

2 automatic battery chargers.

Alarm relay with terminal box for remote status control (as required by the UNI EN 12845 standard).

System start-up input connection terminal box.

ON FRONT PANEL

Diesel pump control unit with:

Multifunction instrument with display (voltmeter, ammeter, revolution counter, hours of operation counter, Diesel percentage level, oil pressure).

Start and Stop pushbuttons (one for each battery).

Status and alarm notification lamps.

Lamp test pushbutton.

First start-up TEST pushbutton (*).

Breakable glass protected rocker switch for pump start, bypassing the control unit in case of fault.

0 - 1 selector (0 = automatic disabled; 1 = automatic on), key removable only for position one (AUTOMATIC ON).

REMOTELY CONTROLLED ALARMS

Voltage present.

Phase sequence.

Pump start request from the pressure switches.

Pump start request from priming tank.

Pump in operation.

Start failed.

The above alarms can be remotely controlled in the following ways:

With relay wiring to the CSR-1 control panel.

With RS-485 wiring to the CSR-1 control panel.

With GSM Modem in the CSR-1 control panel, for forwarding status and/or alarm signals SMS (optional).

The control panel receives the signal from the pressure switches and starts the engine-driven pump also when no power network voltage is detected. The pump running status is detected through the speed/revolution sensor signal (as required by section 10.9.8 of UNI EN 12845). The panel is equipped with a start-up system with two 12V batteries (as required by section 10.9.8. of UNI EN 12845). If one of the batteries is faulty, the panel automatically starts the pump up using the other battery (6 alternated starts).

(*) When the engine-driven pump is put into operation on site for the first time, it will be necessary to check the start failure alarm (in accordance with section 10.9.12.2 of UNI EN 12845). For this purpose, on the front of the control panel is a TEST pushbutton that simulates no. 6 alternate start attempts on the two batteries, if there is no fuel. At the end of the TEST, the start failure alarm activates (lamp + N.O. contact)



DIESEL PUMP CONTROL PANEL

UNI EN 12845 FIRE-FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH VERTICAL TURBINE PUMPS

DIESEL ENGINE-DRIVEN PUMP CONTROL UNIT

The A1 electronic pump control unit supplied with the control panel offers the following features: automatic start with 6 alternate pulses on the 2 batteries, with starter gear engaged check, manual start, battery efficiency check, particularly during start-up, automatic monitoring of pump set faults and display of battery charge signals.


DISPLAY

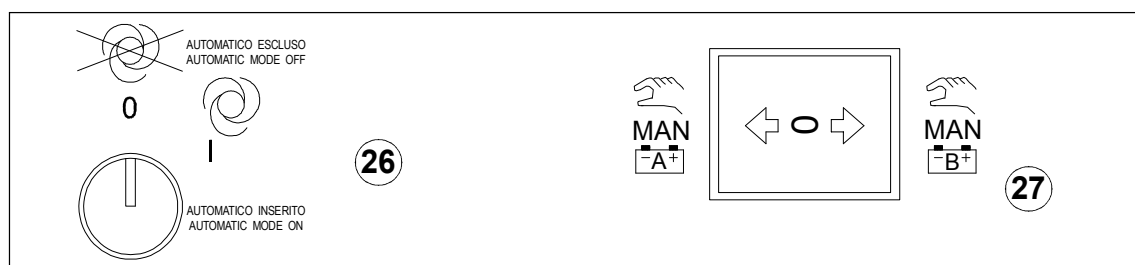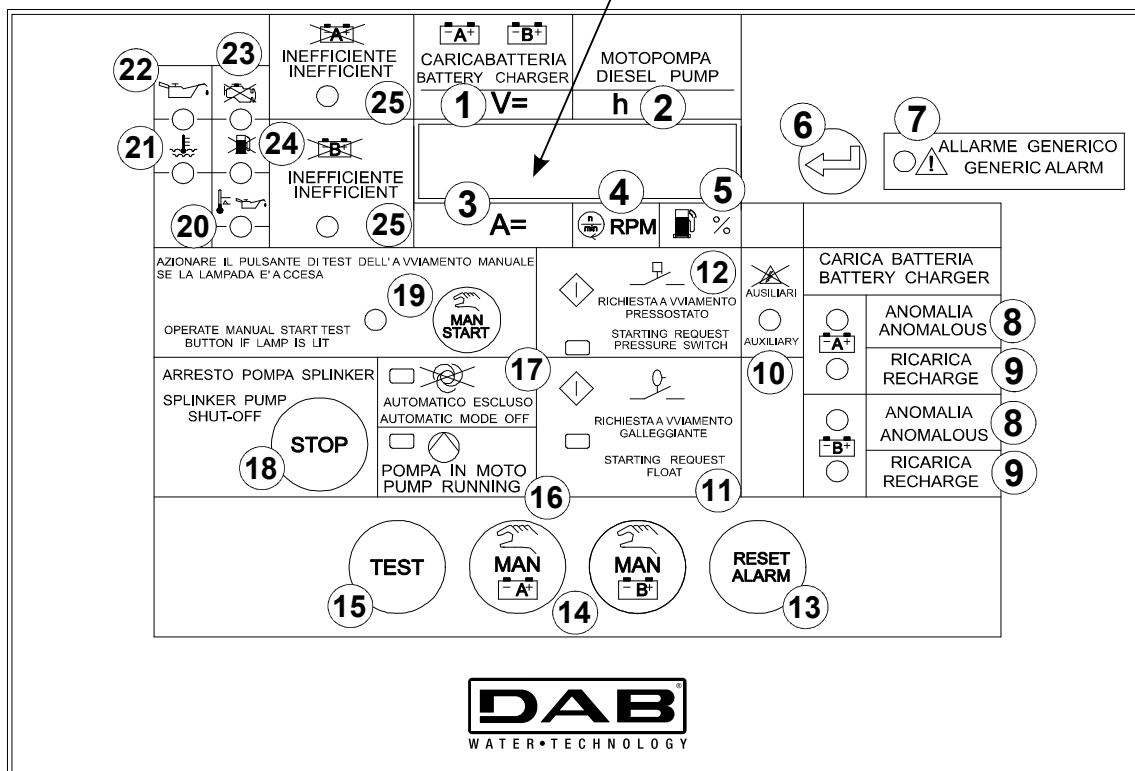


REF.	FUNCTION
1	A and B battery charger voltmeters
2	Hour meter
3	A and B battery charger ammeters
4	Hour meter
5	Fuel level gauge
6	- Press briefly to show instruments - Press and hold down for LED test
7	Generic alarm
8	Fault detected by the battery charger during battery charging
9	Battery charger ON
10	No power input to the battery charger detected alarm
11	Start request from the pump priming tank flow switch
12	START request (call) from the pressure switches
13	Fault reset

REF.	FUNCTION
14	Manual engine-driven pump start using batteries A and B (always active)
15	Start-up test
16	Engine-driven pump running
17	Automatic mode disabled
18	Engine-driven pump set stop pushbutton
19	Manual start test pushbutton and lamp
20	Oil or water heater not heating
21	Overtemperature alarm
22	Insufficient oil pressure alarm
23	Start failed alarm
24	Low fuel alarm
25	Faulty A and B battery alarm
26	Automatic mode disabling selector
27	Breakable glass protected pushbutton for emergency start of battery A or B

EN 12845 SET COMPONENTS - ELECTRIC PUMP SET + ENGINE-DRIVEN PUMP SET

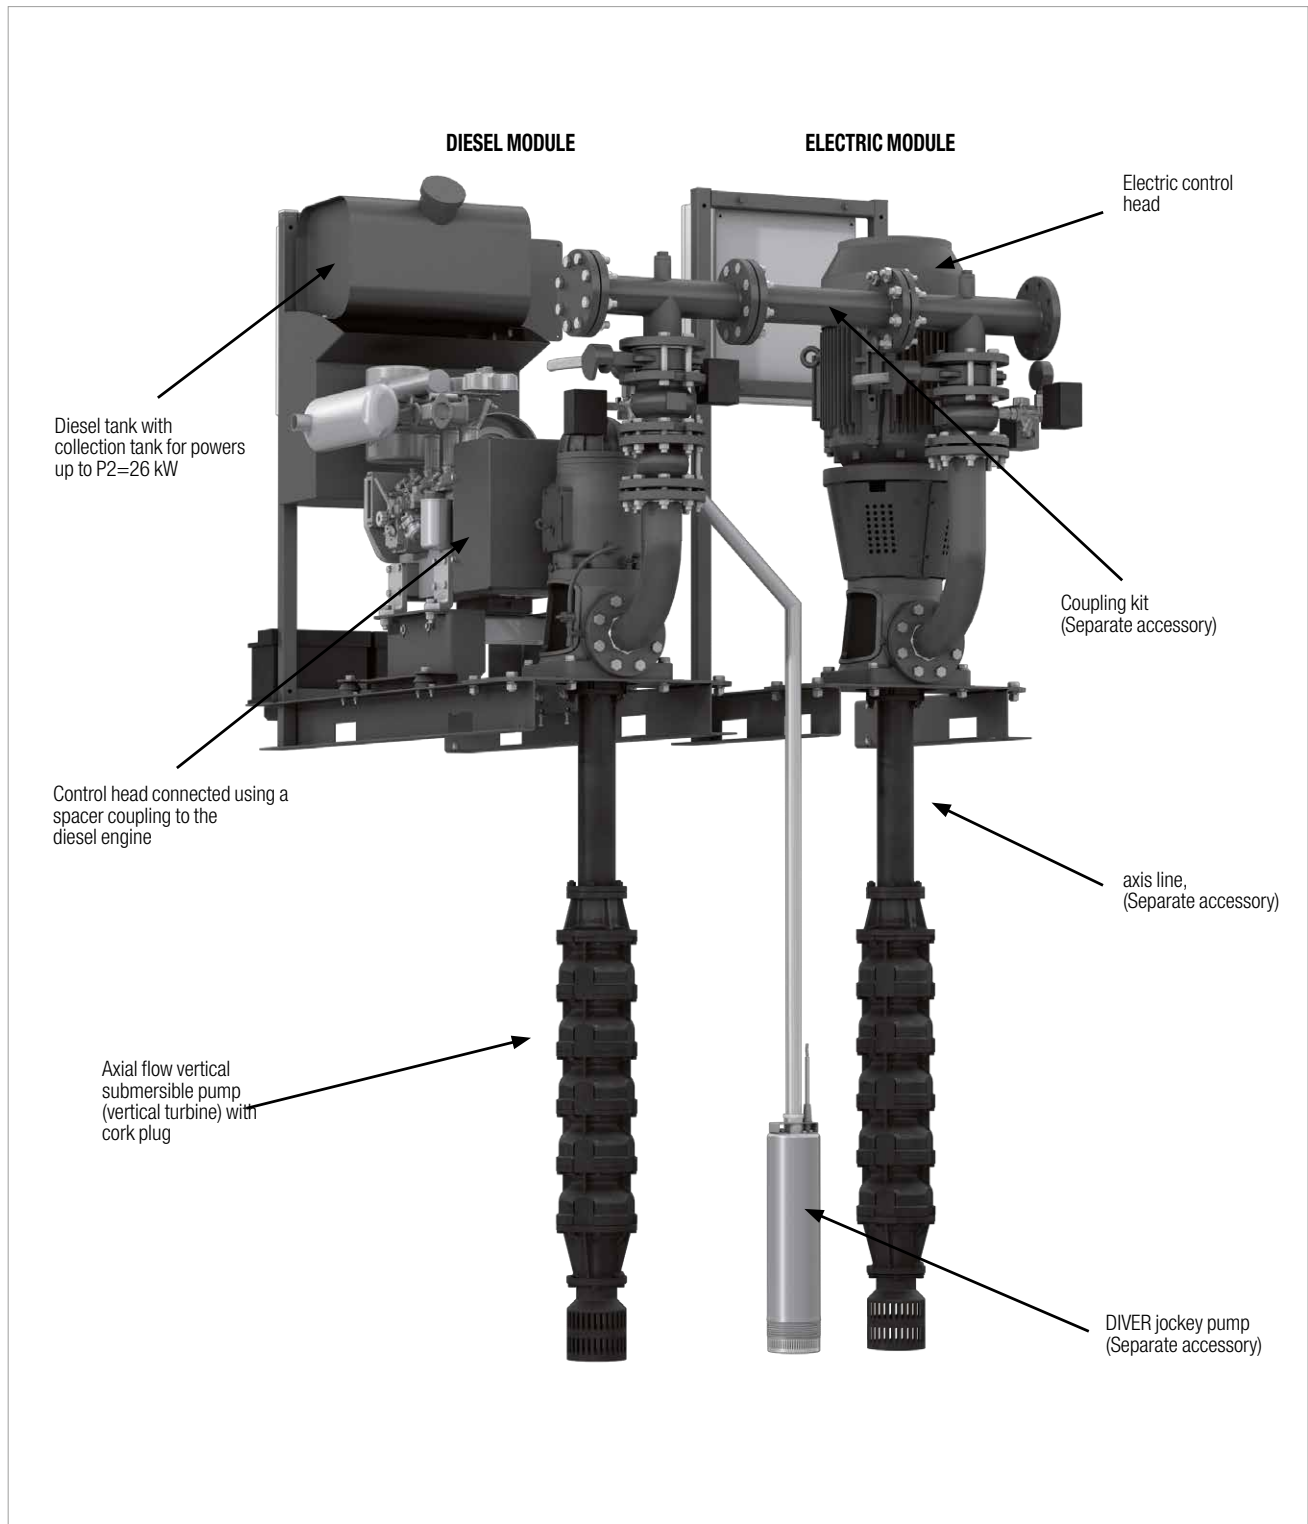

EN 12845 SET COMPONENTS - ELECTRIC PUMP SET

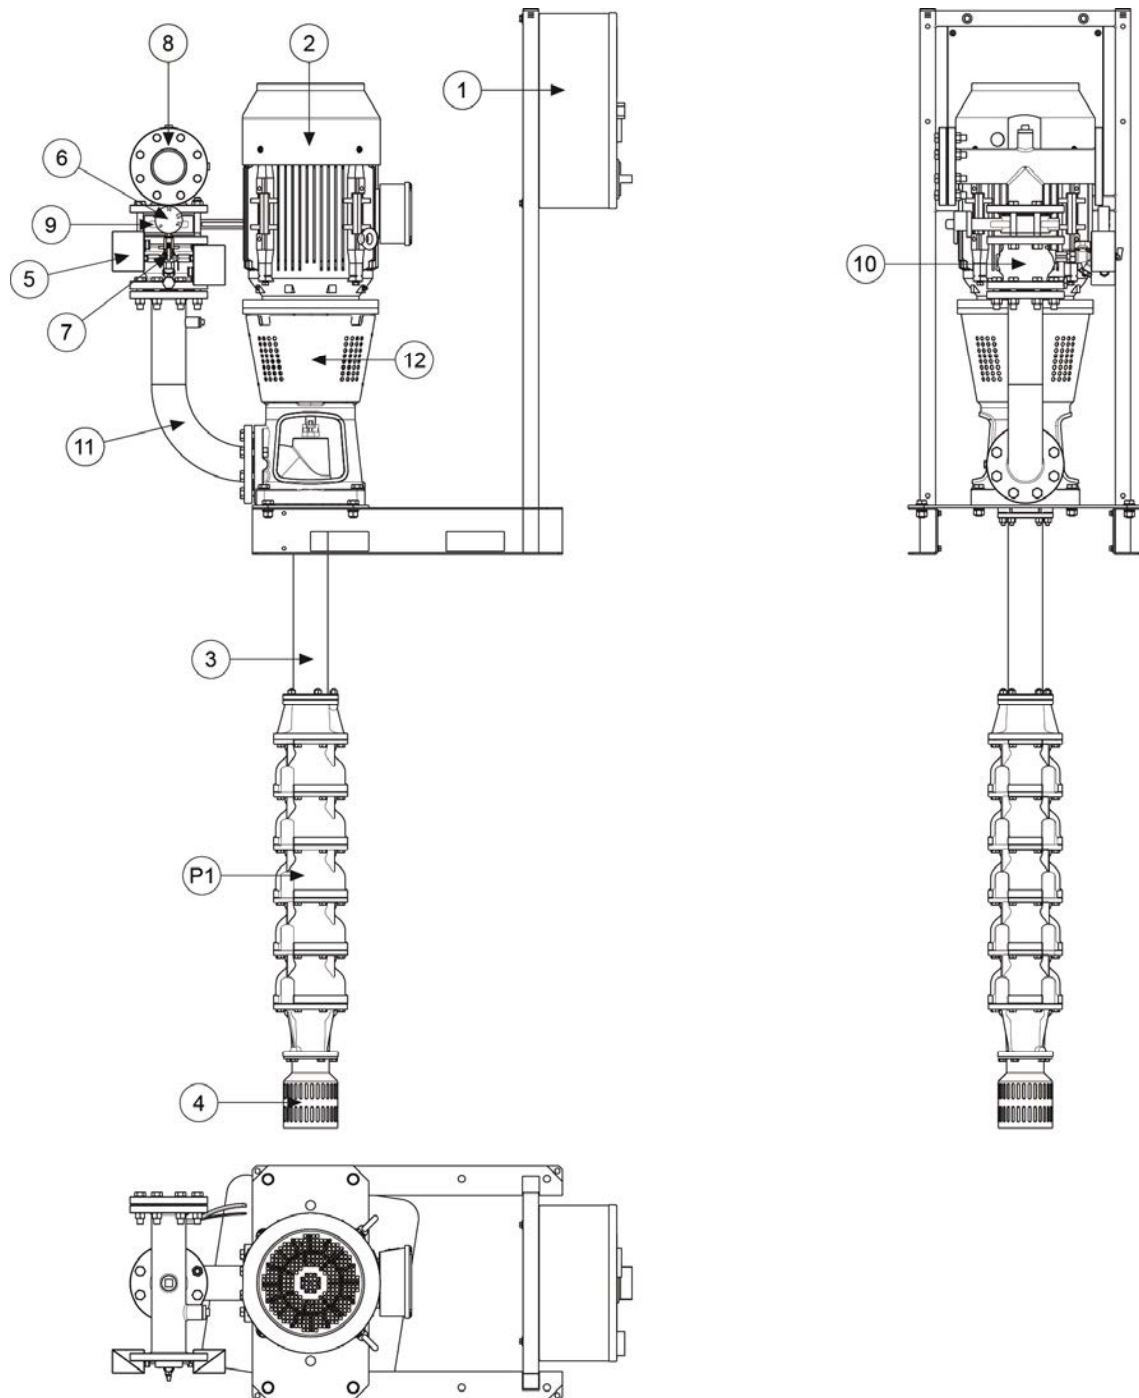


P1	Submersible pump
1	Electric control panel
2	Electric motor
3	Axis line
4	Cork plug

5	Pressure switch
6	Manometer
7	ByPass
8	Delivery manifold
9	Butterfly valve

10	Inspectable non-return valve
11	Bent delivery adaptor
12	Control head

UNI EN 12845 SET COMPONENTS - ENGINE-DRIVEN PUMP SET

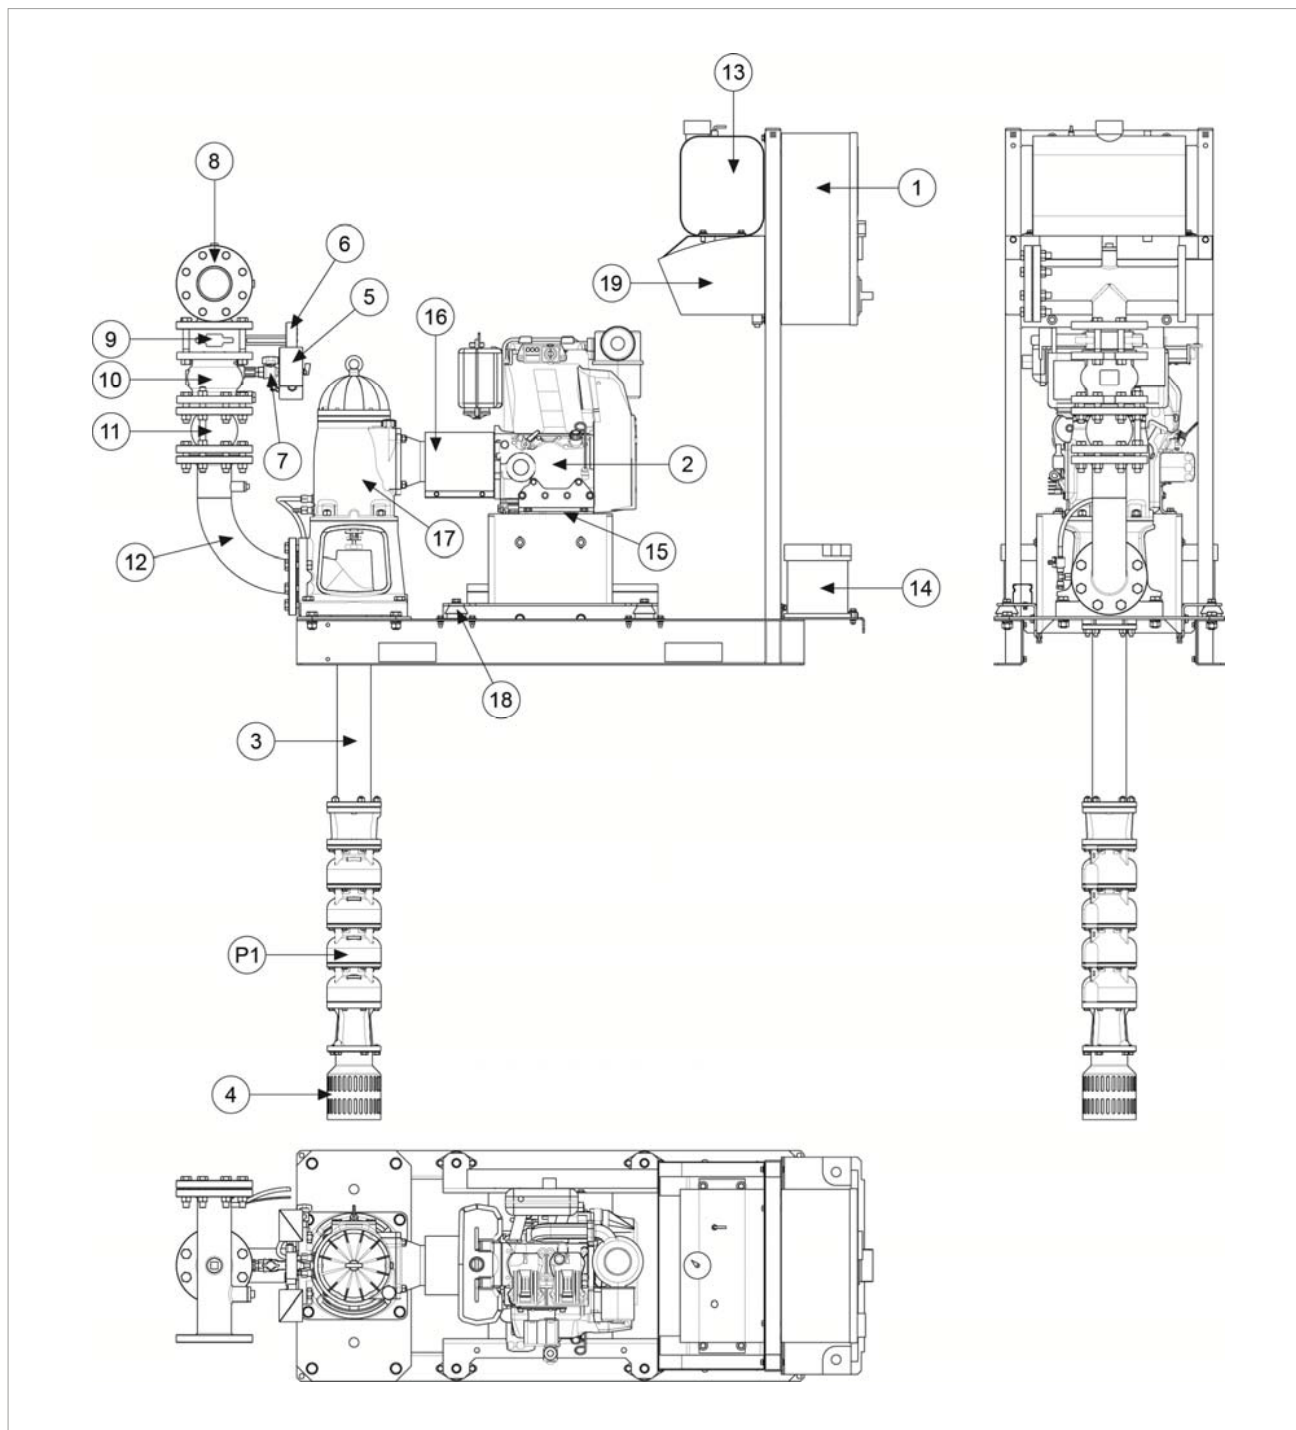


P1	Submersible pump
1	Electric control panel
2	Diesel engine
3	Axis line
4	Cork plug
5	Pressure switch
6	Manometer

7	ByPass
8	Delivery manifold
9	Butterfly valve
10	Inspectable non-return valve
11	Anti-vibration coupling
12	Bent delivery adaptor
13	20 litre diesel engine-driven pump tank

14	Diesel engine-driven pump starter batteries
15	Oil heater
16	Elastic coupling
17	Control head
18	Anti-vibration foot
19	Diesel collection tank

CONNECTION OF PRESSURE SWITCHES AND PUMP MOTOR/ENGINE TO THE CONTROL PANEL

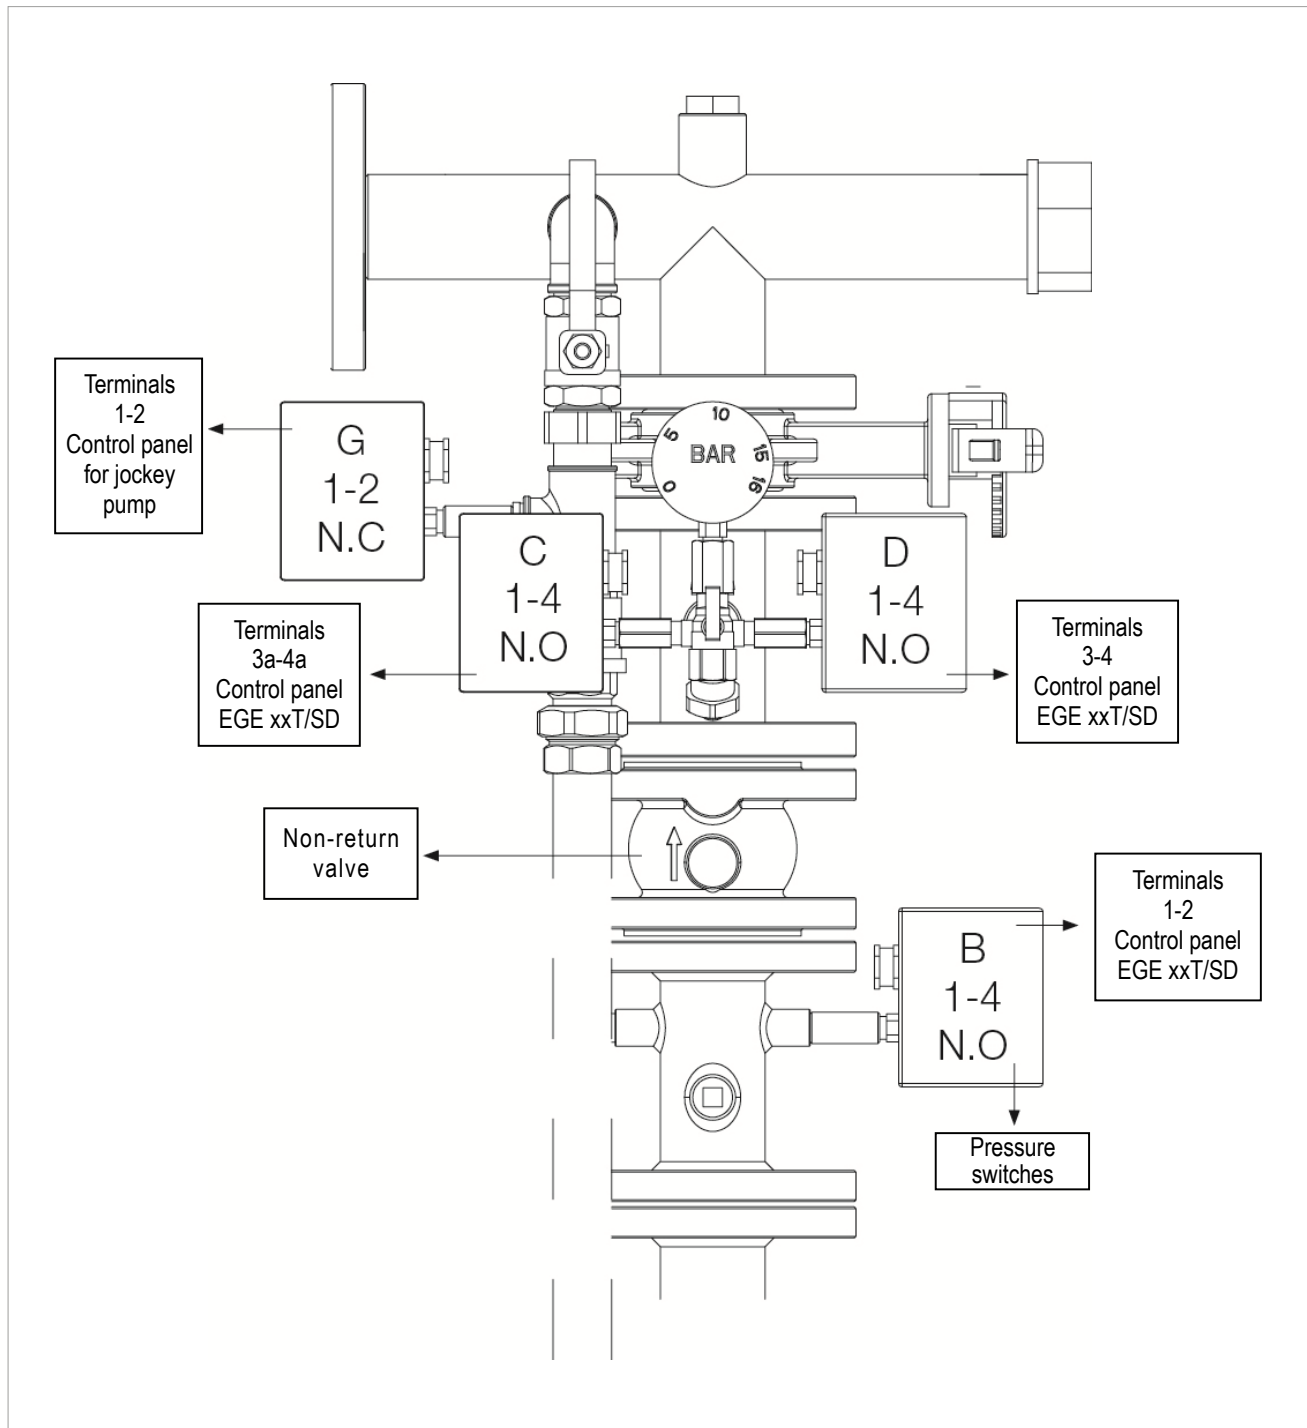


Cable connection sequence for submerged pumps with start:

DOL DIRECT START-UP		
POWER MOTOR UP TO 7.5 kW	TERMINAL BOX CONTROL PANEL EGEXX T	CABLE COLOUR ELECTRIC PUMP SUBMERSIBLE
	U1	BLACK
	V1	BLUE OR GREY
	W1	BROWN

STAR/TRIANGLE		
POWER MOTOR OVER 7.5 kW	TERMINAL BOX CONTROL PANEL EGEXX T SD	CABLE COLOUR ELECTRIC PUMP SUBMERSIBLE
	U1	BLACK
	V1	BLUE OR GREY
	W1	BROWN
	U2	BROWN
	V2	BLACK
	W2	BLUE OR GREY

EXAMPLE OF EN 12845 SET ASSEMBLY

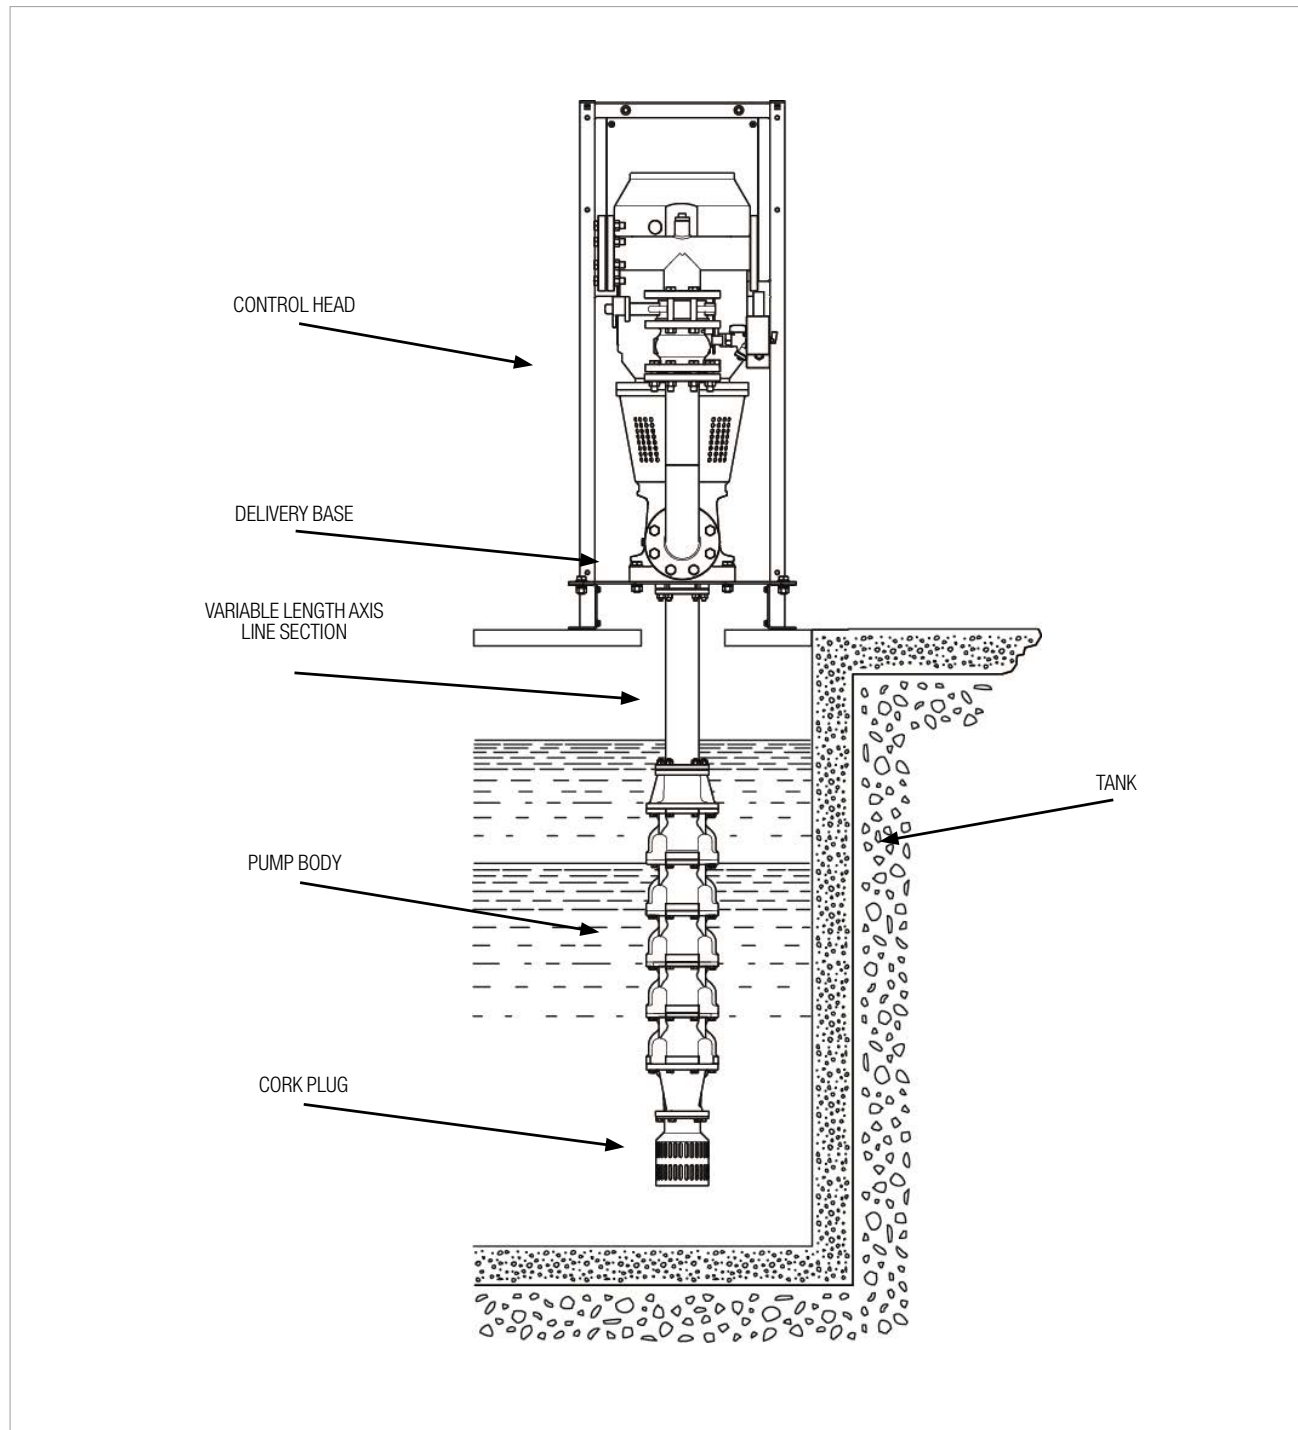

Assembly consists in the assembly and installation of the vertical set as shown in the figure

E.FIRE MONITOR

UNI EN 12845 FIRE-FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH VERTICAL TURBINE PUMPS



TECHNICAL DATA

Nominal power input voltage: 230/400 Vac +/-10% (power input voltage 230 Vac)

Phases: 1+N (230 V) 1+1 (400 V)

Frequency: 50-60 Hz

Sound power level: 75 dB at 30 cm 12 Vdc

Absorption: 0,1 Amp

Battery type: 12 V 1.2 Ah lead battery, sealed, Faston contact

Acoustic alarm autonomy in case of power cut: 5 hours

Characteristic features of the serial communication cable:

2 twisted wire shielded cable plus shield, 600 V, class 1, 15-18 AWG

Maximum impedance 120 ohm, maximum capacity 50 pF/m

Ambient temperature operation limits: -10 °C + 50 °C

Relative humidity: 50 % at 40 °C MAX (90 % at 20 °C) without condensation

Max. altitude: 2000m (asl)

Protection class: IP54

Construction: Max RS485 line length 500 m

ACCESSORY - E.FIRE MONITOR CONTROL PANEL

The UNI EN 12845 standard requires that a range of alarms are forwarded to a permanently manned location, inside or outside the building, or to a plant manager.

In order to fulfil this requirement of the UNI EN 12845 standard, it is possible to use the E.FIRE MONITOR alarm control unit, which notifies the operating conditions of the fire-fighting pump station by means of an acoustic signal.

The E.FIRE MONITOR alarm control unit can be connected to the fire-fighting pump station using a telephone pair (485 serial type connection), to the electric or diesel engine-driven pump control panels.

One single E.Fire Monitor can control up to three pump sets, electric or Diesel, in the various required configurations.

FUNCTIONS

The control unit visually and acoustically notifies, by LED and buzzer respectively, the operating conditions of the pump sets in the different installation solutions:

- all the possible combinations with up to three pumping units maximum


E.Fire Monitor is a necessary accessory for the supervision of remote alarms, and guarantees autonomy of at least 5 hours, as far as the operation of the alarms, in case of electric power cuts. It is also possible to connect a GSM Modem (optional), in order to display alarms on a mobile phone, receiving system status SMS messages.

Alarms may be replicated at two different positions by connecting two E.Fire Monitors.

E.FIRE MONITOR

UNI EN 12845 FIRE-FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH VERTICAL TURBINE PUMPS

DIAGRAM FOR THE CONNECTION OF E.FIRE MONITOR TO THE CONTROL PANELS ELECTRIC OR ENGINE-DRIVEN PUMP WITH SERIAL CONNECTION

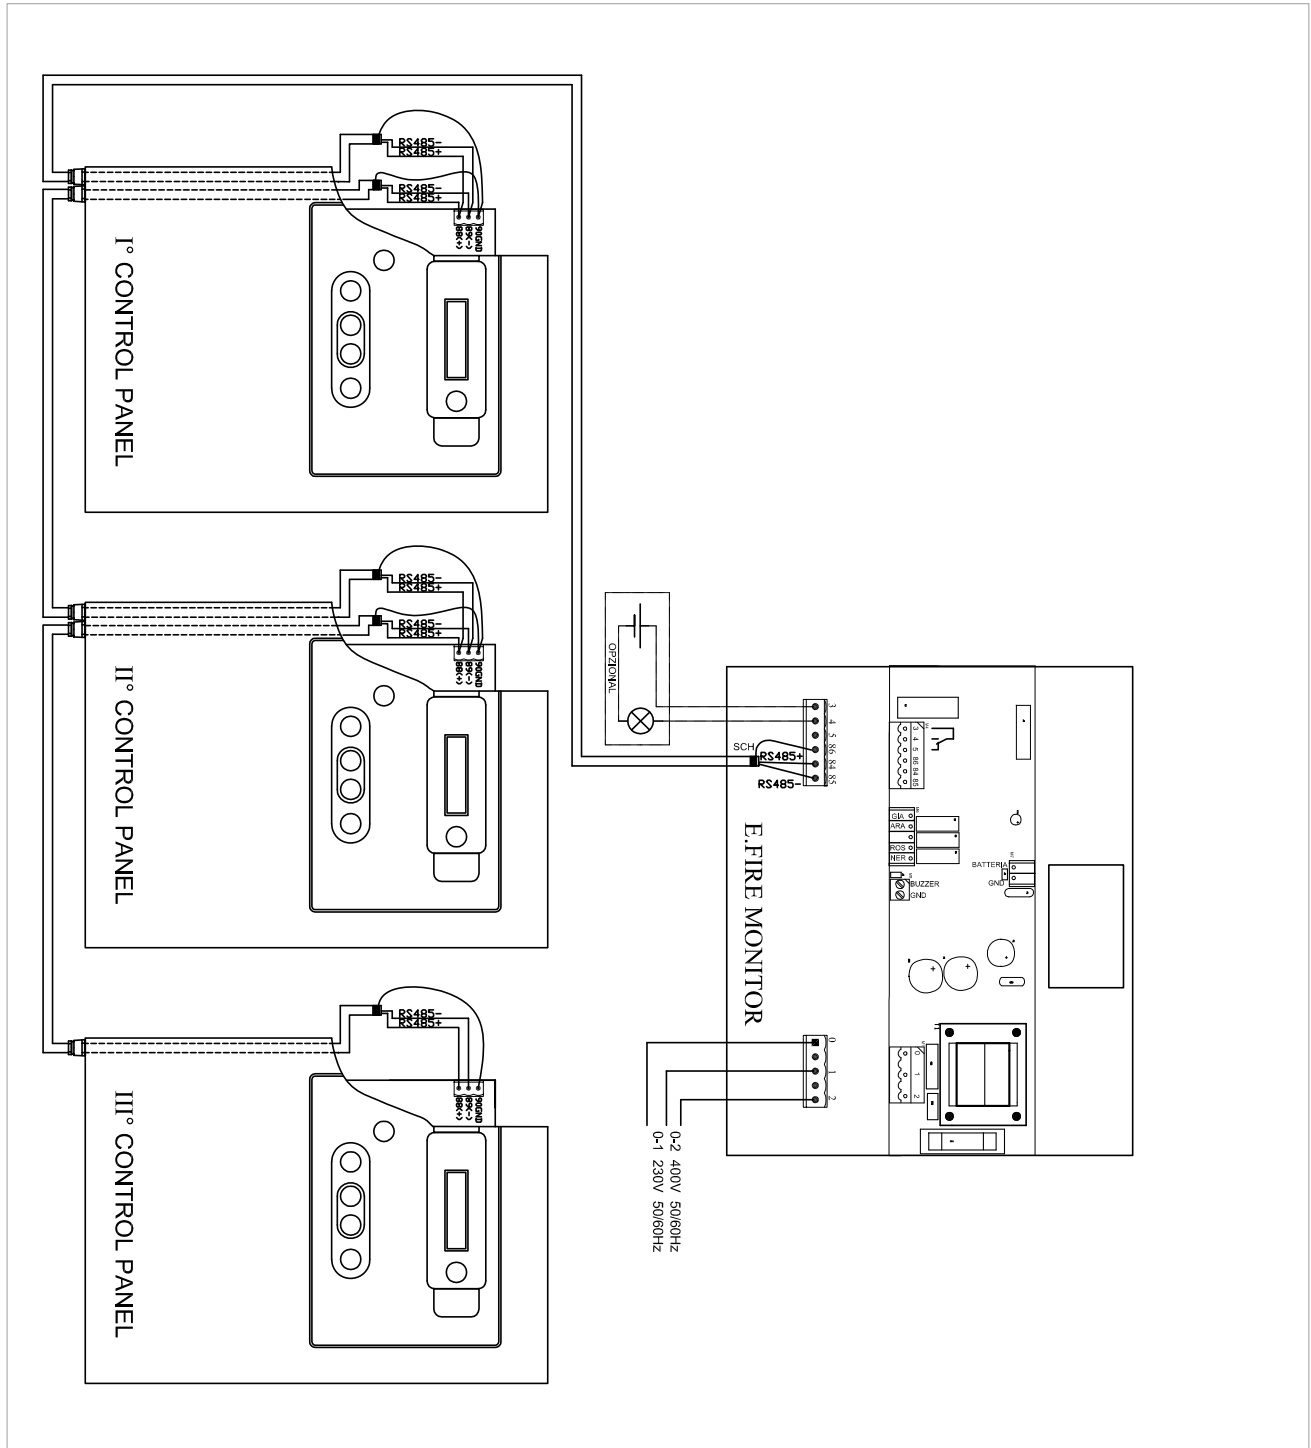

CSR-1 ALARM CONTROL PANEL

UNI EN 12845 FIRE-FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH VERTICAL TURBINE PUMPS



TECHNICAL DATA

Nominal power input voltage: 230 a.c. +/- 10%

Phases: 1

Frequency: 50-60 Hz

Sound power level: 75 dB A

Absorption: 0,1 Amp

Battery type: 12 V; 2,3 Ah lead battery (Faston output)

Acoustic alarm autonomy in case of power cut: 20 hours

Characteristic features of the serial communication cable:

2 twisted wire shielded cable plus shield, 600 V, class 1, 15-18 AWG

Maximum impedance 120 ohm, maximum capacity 50 pF/m

Ambient temperature operation limits: -10 °C + 40 °C

Relative humidity: 50 % at 40 °C MAX (90 % at 20 °C) without condensation

Max. altitude: 2500 m (asl)

Protection class: IP55

Construction: According to UNI EN 12845

ACCESSORY - CSR-1 ALARM CONTROL PANEL

The UNI EN 12845 standard requires that a range of alarms are forwarded to a permanently manned location, inside or outside the building, or to a plant manager.

In order to fulfil this requirement of the UNI EN 12845 standard, it is possible to use the CSR-1 alarm control panel, which notifies the operating conditions of the fire-fighting pump stations by means of an acoustic signal.

The CSR-1 alarm control unit can be connected to the fire-fighting pump station using multi-conductor cables (contact connection), or using a telephone pair (485 serial type connection), to the electric or Diesel engine-driven pump control panels.

One single CSR-1 can control one or both pumps, electric or Diesel, in the various required configurations.

FUNCTIONS

The control unit controls and notifies, using a 2x16 character display - visually by means of LEDs, and acoustically by means of a buzzer -, the operating conditions of the pump sets in the different installation solutions:

- system for one electric pump,
- system for two electric pumps,
- system for electric pump and Diesel pump,
- system for Diesel pump,
- system for two Diesel pumps.


The CSR-1 is a necessary accessory for the supervision of remote alarms, and guarantees autonomy of at least 20 hours as far as the operation of the alarms in case of power cuts from the electricity network. It is also possible to connect a GSM Modem (optional) in order to display alarms on a mobile phone, receiving system status SMS messages.

It is possible to remotely forward a cumulative signal of all the alarms using one output (XC9) with clean contact (without voltage) with remote silencing.


CSR-1 ALARM CONTROL PANEL

UNI EN 12845 FIRE-FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH VERTICAL TURBINE PUMPS

DIAGRAM FOR THE CONNECTION OF CSR-1 TO THE CONTROL PANELS ELECTRIC OR ENGINE-DRIVEN PUMP WITH SERIAL CONNECTION

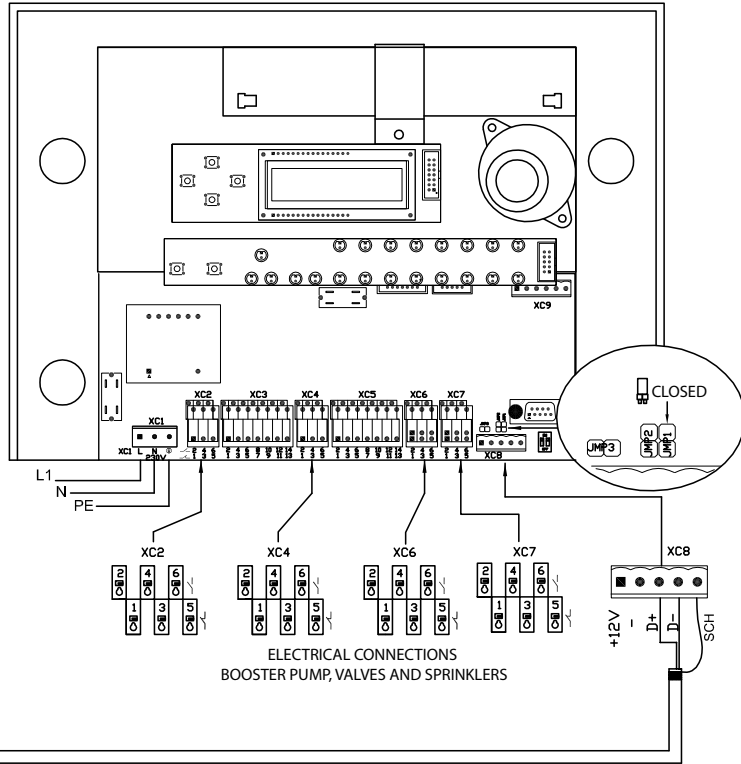


ELECTRICAL CONNECTIONS
BOOSTER PUMP, VALVES AND SPRINKLERS

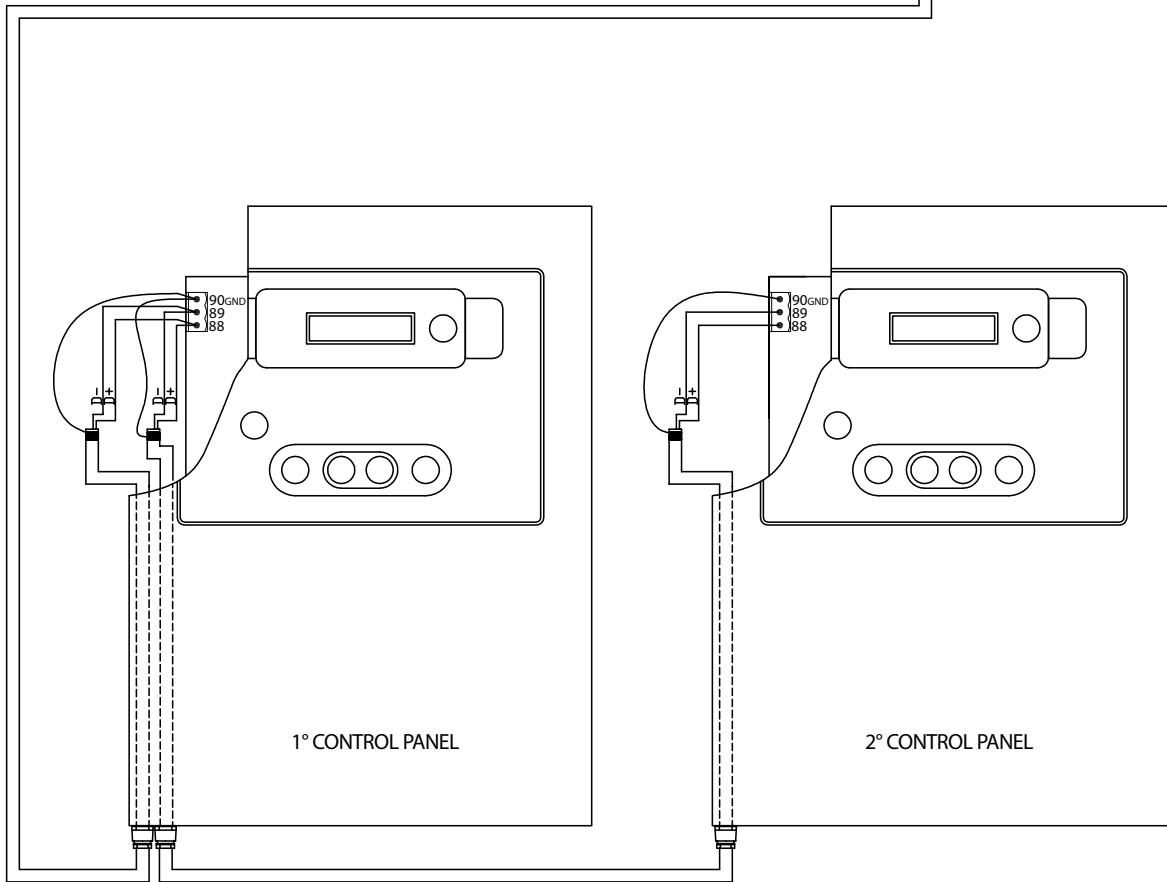

CSR-1 ALARM CONTROL PANEL

UNI EN 12845 FIRE-FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH VERTICAL TURBINE PUMPS

DIAGRAM FOR THE CONNECTION OF CSR-1 TO THE CONTROL PANELS ELECTRIC AND ENGINE-DRIVEN PUMP WITH CONTACT CONNECTION

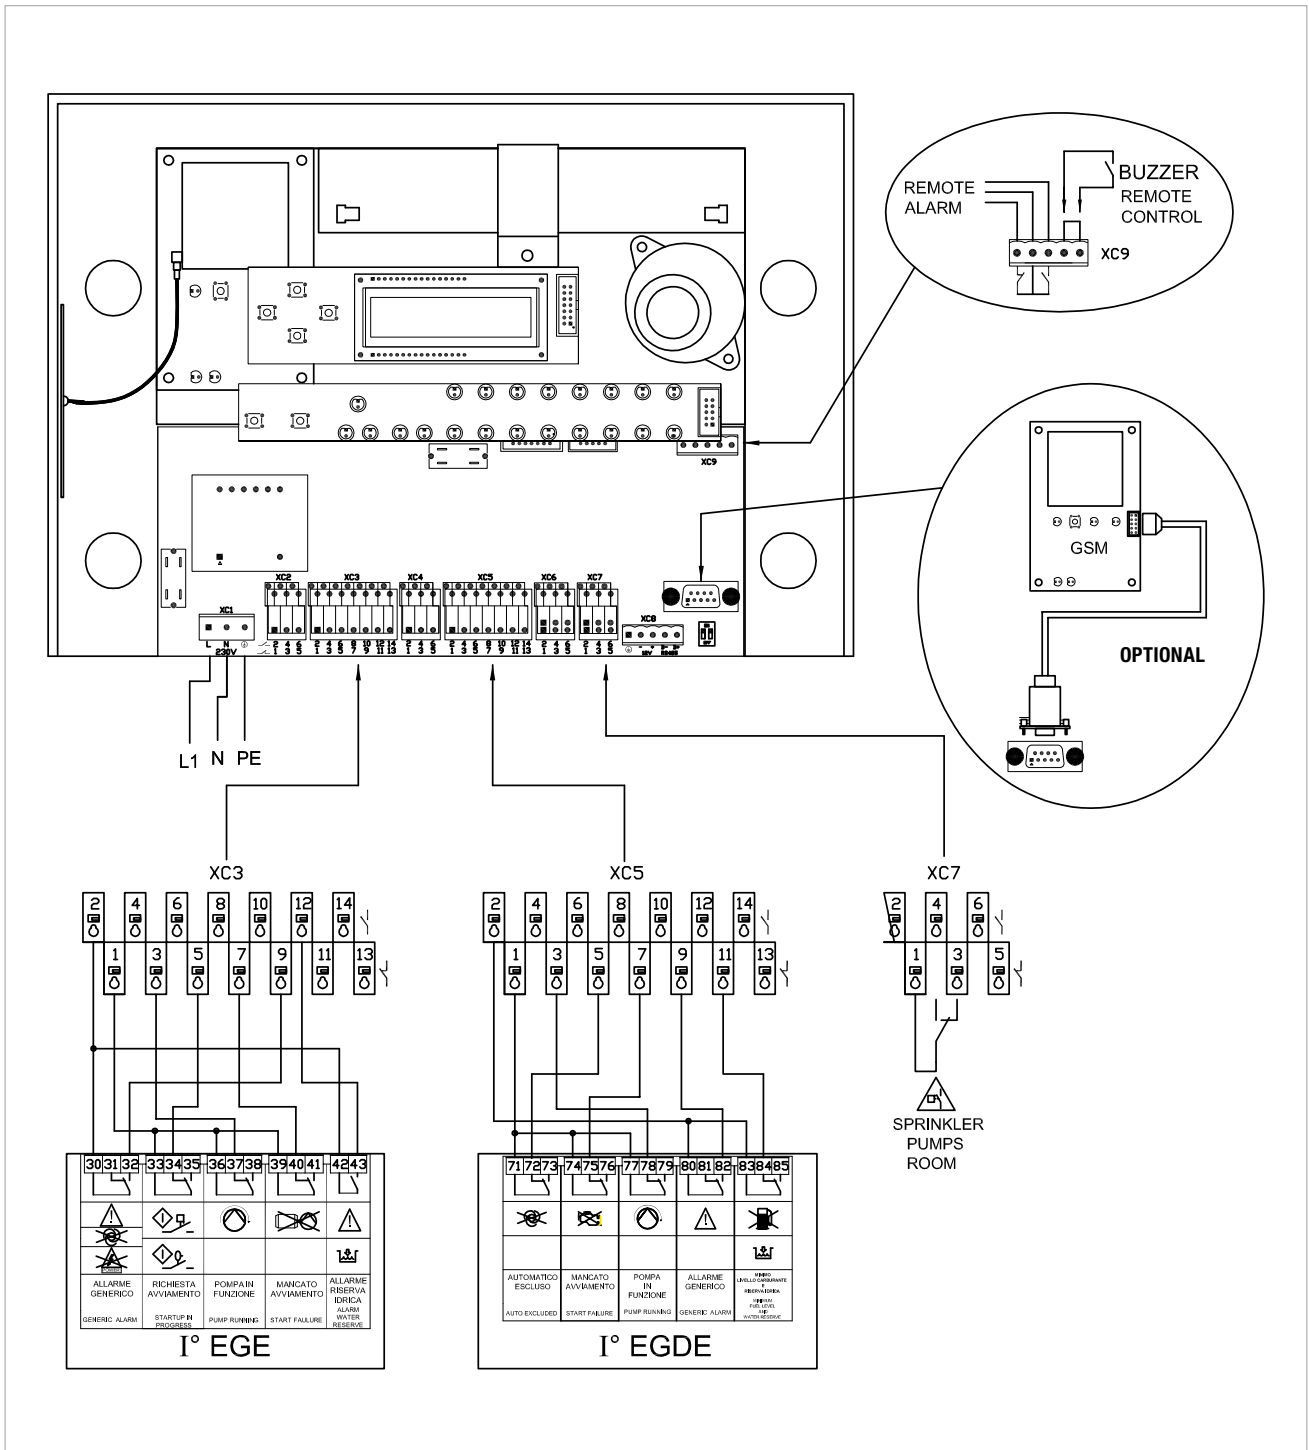


FIRE-FIGHTING

PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.


GRAPHIC SELECTION TABLE

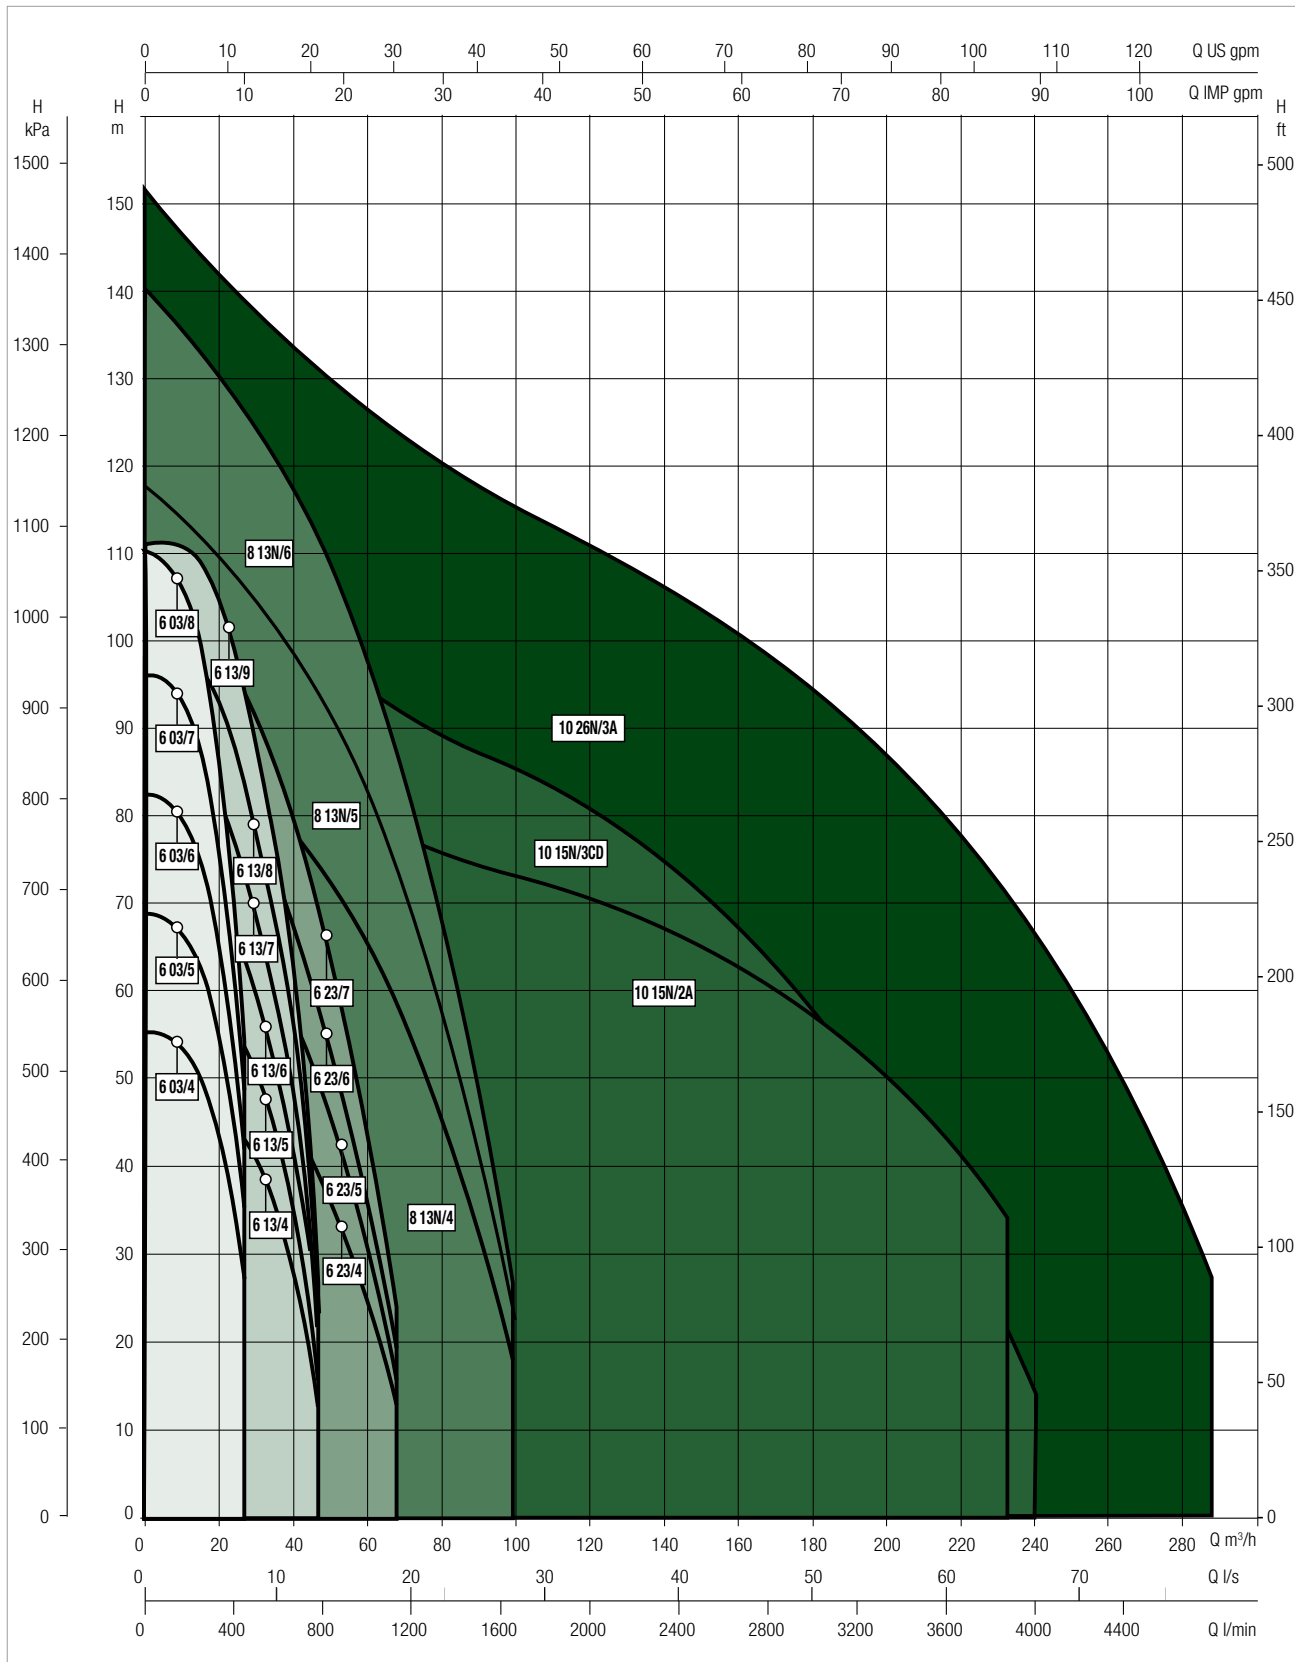

For higher performances contact our sales team

1KVT6 03/4 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0 °C to +40 °C - Ambient temperature range: from +4 °C to +40 °C

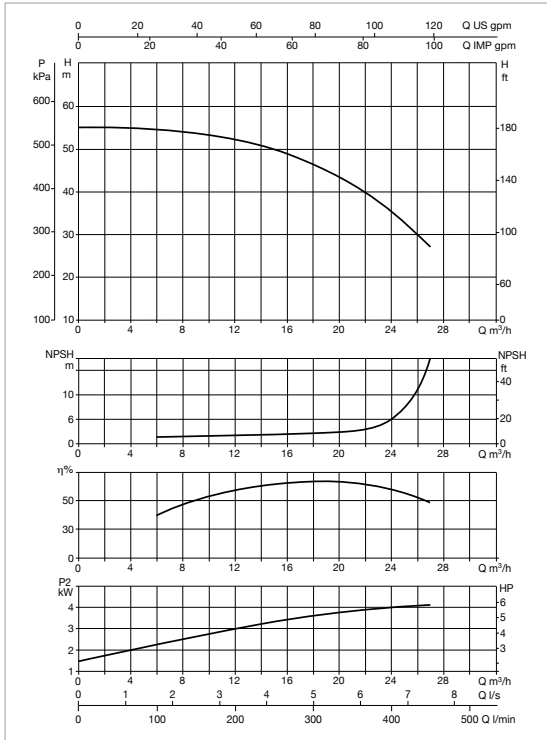

KVT EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMPE	P2 JOCKEY PUMP	In A	METER KIT
			kW	kW		
1 KVT6 03/4 5,5 400/50	3 x 400 V ~	DIVER 150 T	5,5	1	10,4	FLOW METER DN 80

KVT EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	*** P2 DIESEL ENGINE-DRIVEN PUMP	P2 JOCKEY PUMP	FAN SURFACE	DIESEL COLLECTION TANK
			kW	kW		
1 KVT6 03/4 7,1 MD	1 x 220 - 240 V ~	DIVER 150 T	7,1	1	0,22 m²	20 l Included

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE

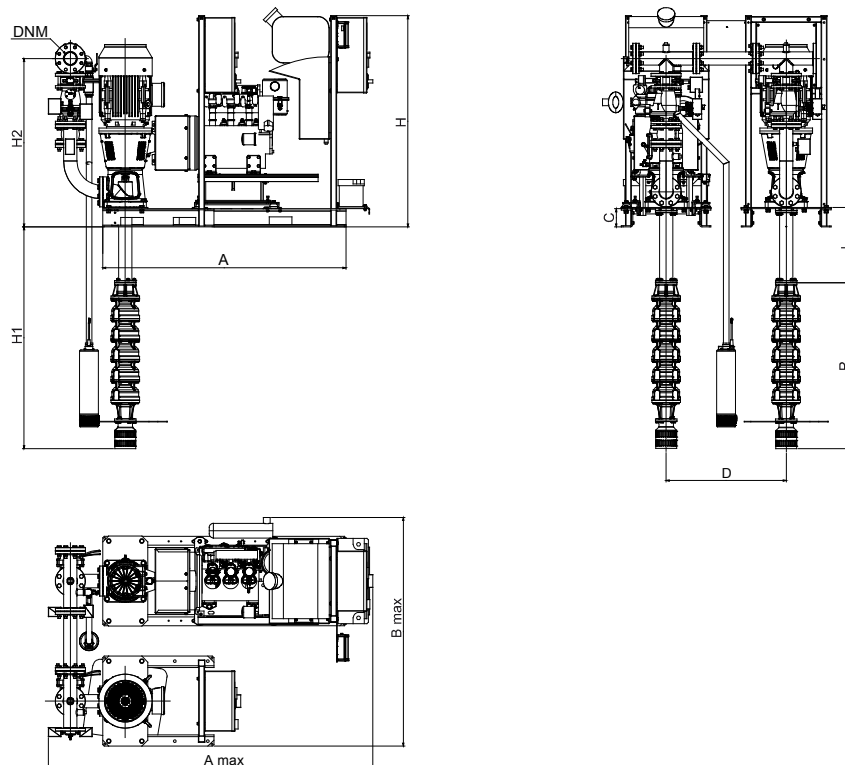


1KVT6 03/4 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

ELECTRIC PUMP MODULE

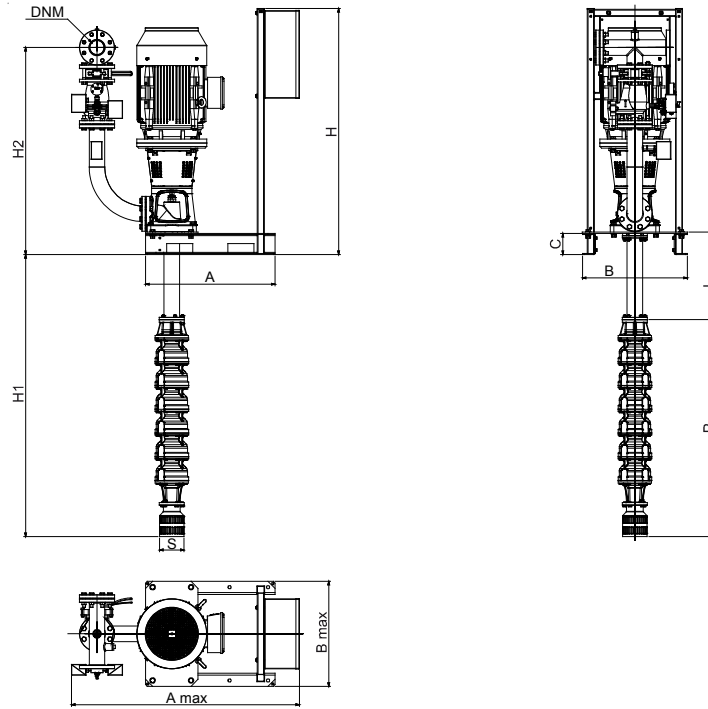

DIESEL ENGINE-DRIVEN PUMP MODULE

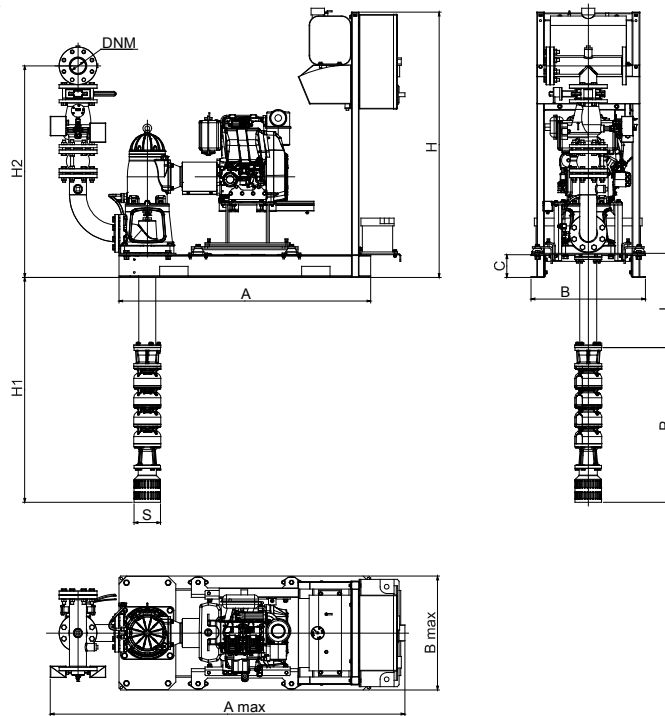


MODEL	A	A max	B	B max	C	H	H2	P	S	L	H1	A1	B1	B3	DNM
1 KVT6 03/4 - ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE	1974	2218	-	1602	140	1406	1183	820	-	2000	2700	-	-	-	DN 80
1 KVT6 03/4 5,5 400/50 - ELECTRIC PUMP MODULE	740	1305	599	599	120	1406	1183	820	Ø 140	2000	2700	-	-	-	DN 80
1 KVT6 03/4 7,1 MD - DIESEL ENGINE-DRIVEN PUMP MODULE	1974	2218	603	603	140	1406	1183	820	Ø 140	2000	2700	-	-	-	DN 80

The L and H1 values depend on the selected axis line (L).
7 different axis line lengths available on request.

1KVT6 03/5 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0 °C to +40 °C - Ambient temperature range: from +4 °C to +40 °C

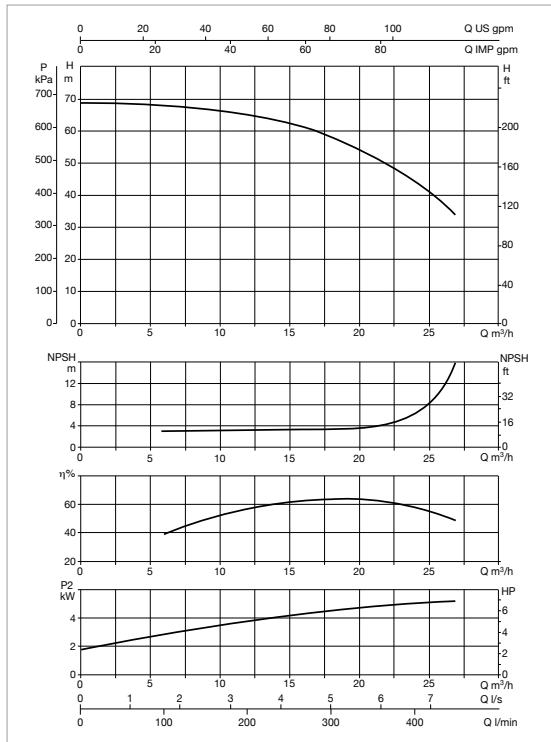

KVT EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	METER KIT
			kW	kW		
1 KVT6 03/5 7,5 400/50	3 x 400 V ~	DIVER 150 T	7,5	1	13,4	FLOW METER DN 80

KVT EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE-DRIVEN PUMP	P2 JOCKEY PUMP	FAN SURFACE	DIESEL COLLECTION TANK
			kW	kW		
1 KVT6 03/5 7,1 MD	1 x 220 - 240 V ~	DIVER 150 T	7,1	1	0,22 m²	20 l Included

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE

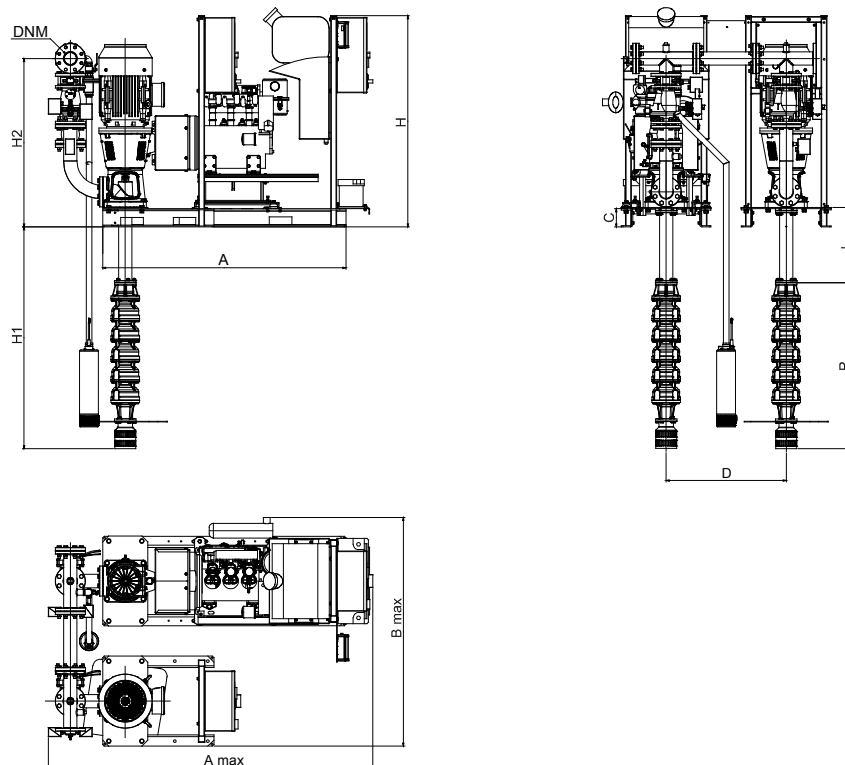


1KVT6 03/5 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

ELECTRIC PUMP MODULE

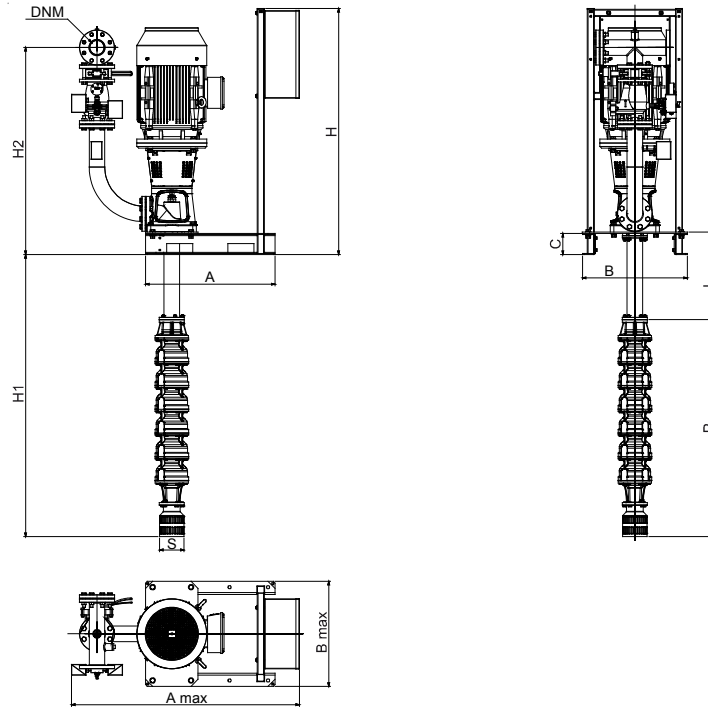

DIESEL ENGINE-DRIVEN PUMP MODULE

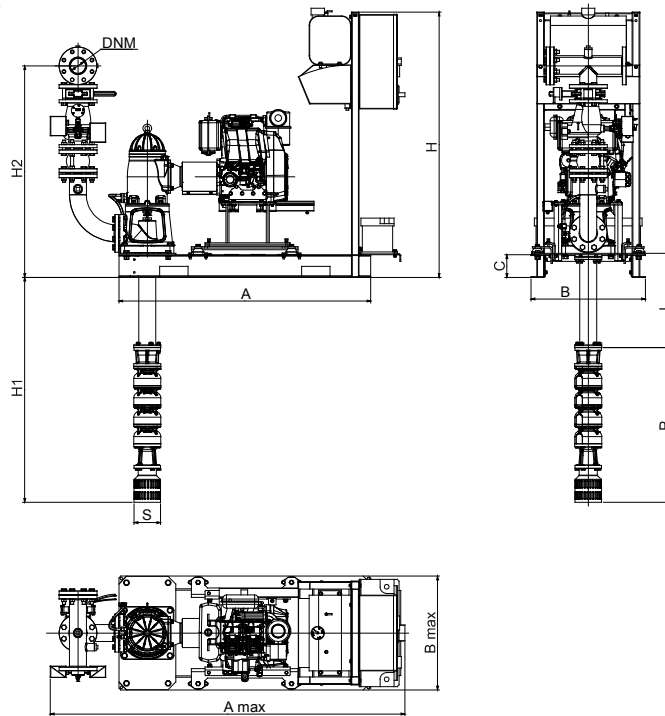


MODEL	A	A max	B	B max	C	H	H2	P	S	L	H1	A1	B1	B3	DNM
1KVT6 03/5 - ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE	1974	2218	-	1602	140	1406	1183	922	-	2000	2802	-	-	-	DN 80
1KVT6 03/5 7,5 400/50 - ELECTRIC PUMP MODULE	740	1305	599	599	120	1406	1183	922	∅ 140	2000	2802	-	-	-	DN 80
1KVT6 03/5 7,1 MD - DIESEL ENGINE-DRIVEN PUMP MODULE	1974	2218	603	603	140	1406	1183	922	∅ 140	2000	2802	-	-	-	DN 80

The L and H1 values depend on the selected axis line (L).
7 different axis line lengths available on request.

1KVT6 03/6 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0 °C to +40 °C - Ambient temperature range: from +4 °C to +40 °C

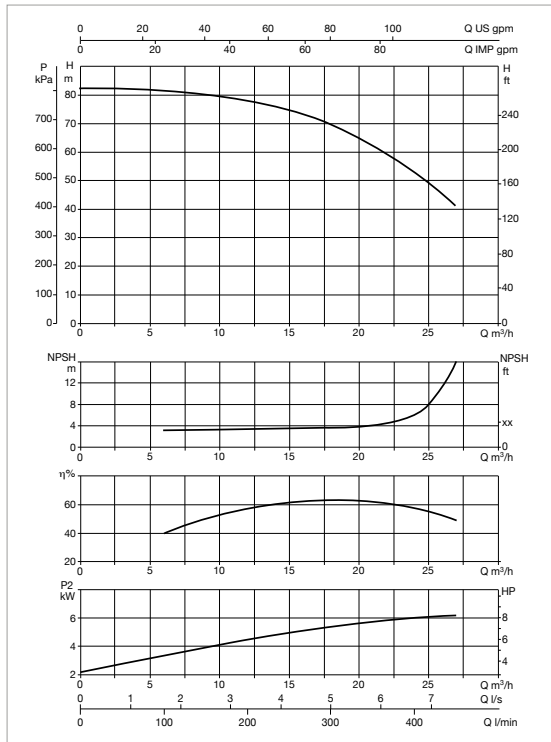

KVT EN 12845 ELECTRIC PUMP

MODEL	POWER INPUTE	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	METER KIT
			kW	kW		
1 KVT6 03/6 7,5 400/50	3 x 400 V ~	DIVER 200 T	7,5	1,5	13,4	FLOW METER DN 80

KVT EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE-DRIVEN PUMPL	P2 JOCKEY PUMP	FAN SURFACE	DIESEL COLLECTION TANK
			kW	kW		
1 KVT6 03/6 11 MD	1 x 220 - 240 V ~	DIVER 200 T	11	1,5	0,22 m²	20 l Included

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE

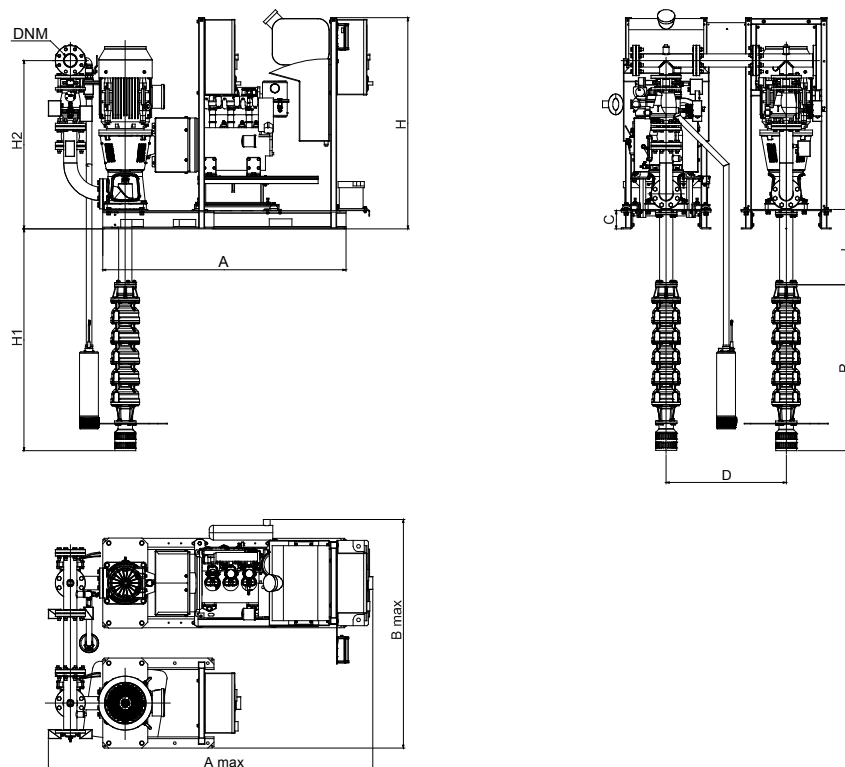


1KVT6 03/6 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

ELECTRIC PUMP MODULE

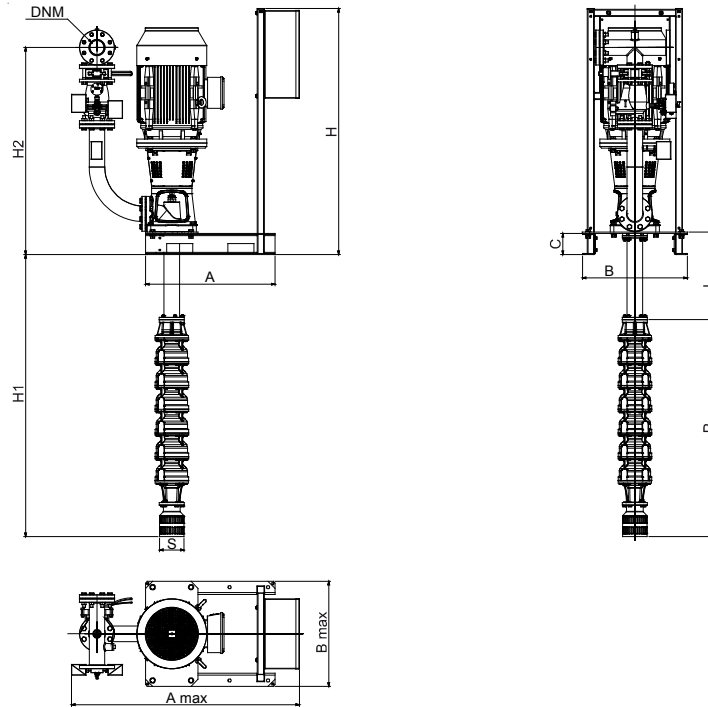

DIESEL ENGINE-DRIVEN PUMP MODULE

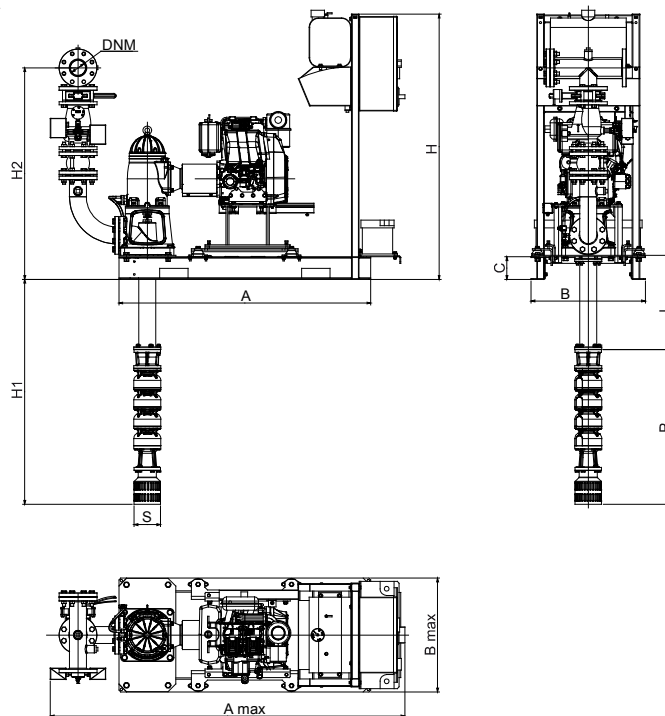


MODEL	A	A max	B	B max	C	H	H2	P	S	L	H1	A1	B1	B3	DNM
1KVT6 03/6 - ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE	1974	2218	-	1602	140	1406	1183	1025	-	2000	2905	-	-	-	DN 80
1KVT6 03/6 7,5 400/50 - ELECTRIC PUMP MODULE	740	1305	599	599	120	1406	1183	1025	∅ 140	2000	2905	-	-	-	DN 80
1KVT6 03/6 11 MD - DIESEL ENGINE-DRIVEN PUMP MODULE	1974	2218	603	603	140	1406	1183	1025	∅ 140	2000	2905	-	-	-	DN 80

The L and H1 values depend on the selected axis line (L).
7 different axis line lengths available on request.

1KVT6 03/7 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0 °C to +40 °C - Ambient temperature range: from +4 °C to +40 °C

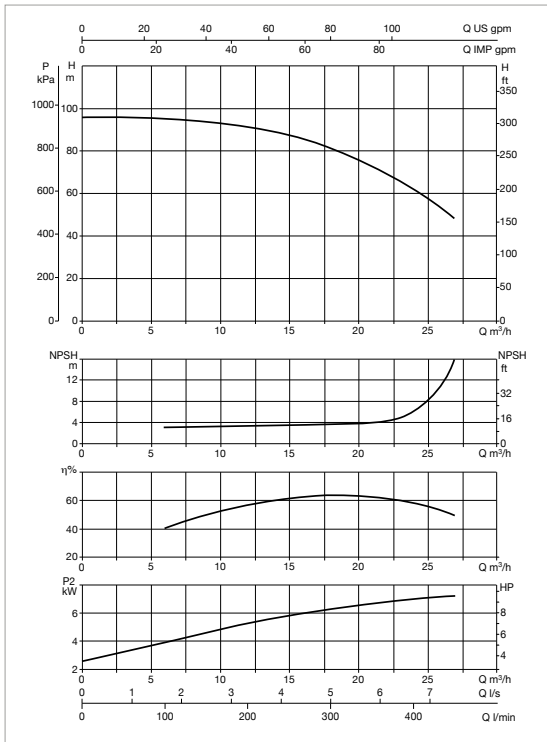

KVT EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	METER KIT
			kW	kW		
1 KVT6 03/7 11 400/50	3 x 400 V ~	DIVER 200 T	11	1,5	19,4	FLOW METER DN 80

KVT EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP**	** P2 DIESEL ENGINE-DRIVEN PUMP	P2 JOCKEY PUMP	FAN SURFACE	DIESEL COLLECTION TANK
			kW	kW		
1 KVT6 03/7 11 MD	1 x 220 - 240 V ~	DIVER 200 T	11	1,5	0,22 m²	Compresa 20 l

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE

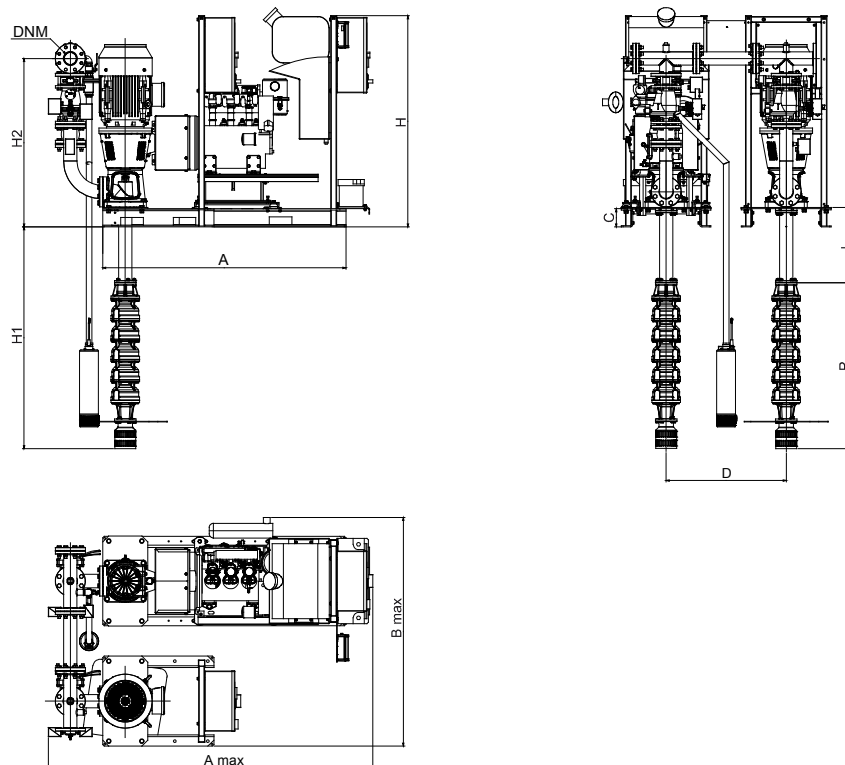


1KVT6 03/7 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

ELECTRIC PUMP MODULE

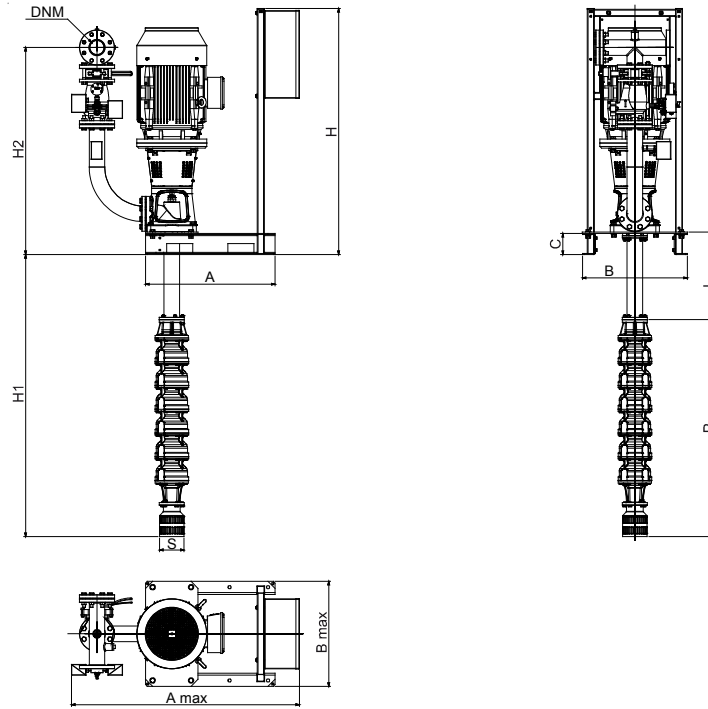

DIESEL ENGINE-DRIVEN PUMP MODULE

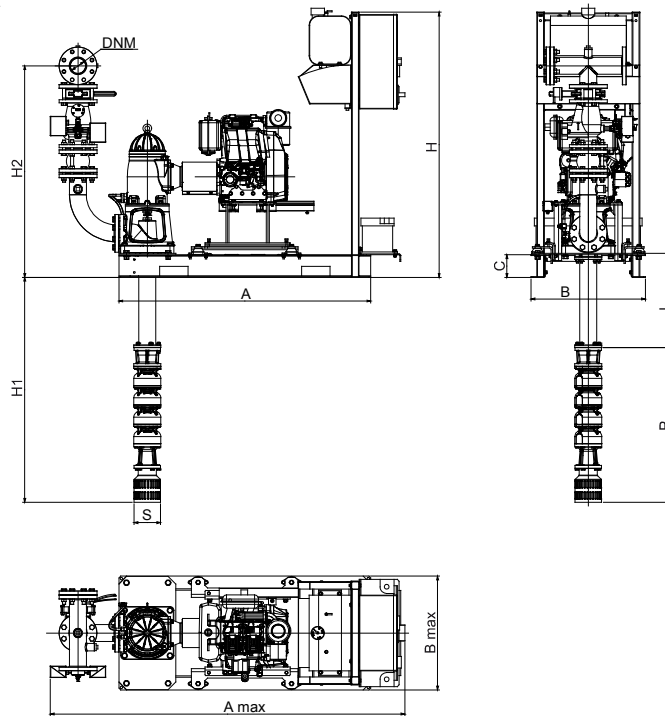


MODEL	A	A max	B	B max	C	H	H2	P	S	L	H1	A1	B1	B3	DNM
1KVT6 03/7 - ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE	1974	2218	-	1602	140	1406	1183	1127	-	2000	3007	-	-	-	DN 80
1KVT6 03/7 11 400/50 - ELECTRIC PUMP MODULE	740	1305	599	599	120	1406	1183	1127	Ø 140	2000	3007	-	-	-	DN 80
1KVT6 03/7 11 MD - DIESEL ENGINE-DRIVEN PUMP MODULE	1974	2218	603	603	140	1406	1183	1127	Ø 140	2000	3007	-	-	-	DN 80

The L and H1 values depend on the selected axis line (L).
7 different axis line lengths available on request.

1KVT6 03/8 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0 °C to +40 °C - Ambient temperature range: from +4 °C to +40 °C

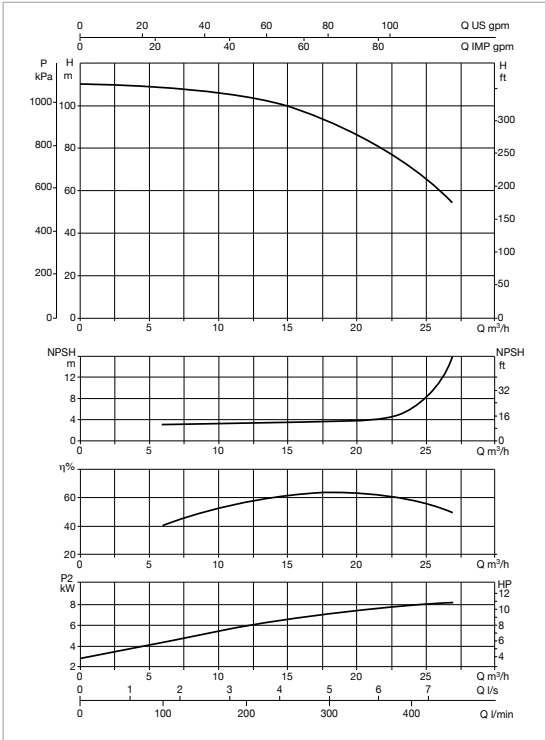

KVT EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	METER KIT
			KW	KW		
1 KVT6 03/8 11 400/50	3 x 400 V ~	DIVER 200 T	11	1,5	19,4	FLOW METER DN 80

KVT EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE-DRIVEN PUMP	P2 JOCKEY PUMP	FAN SURFACE	DIESEL COLLECTION TANK
			KW	KW		
1 KVT6 03/8 11 MD	1 x 220 - 240 V ~	DIVER 200 T	11	1,5	0,22 m²	20 l Included

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE

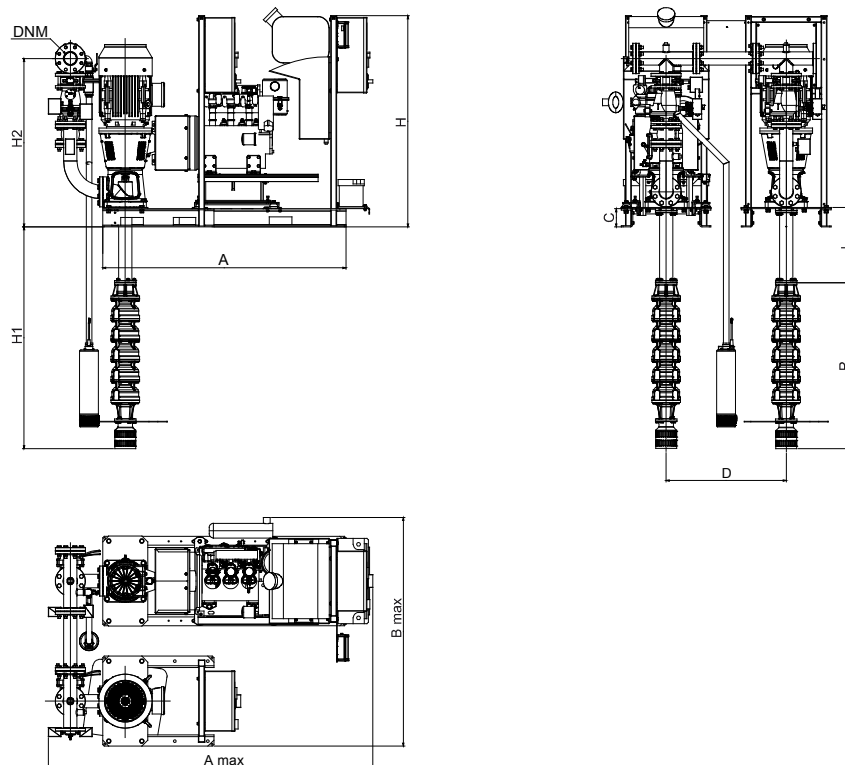


1KVT6 03/8 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

ELECTRIC PUMP MODULE

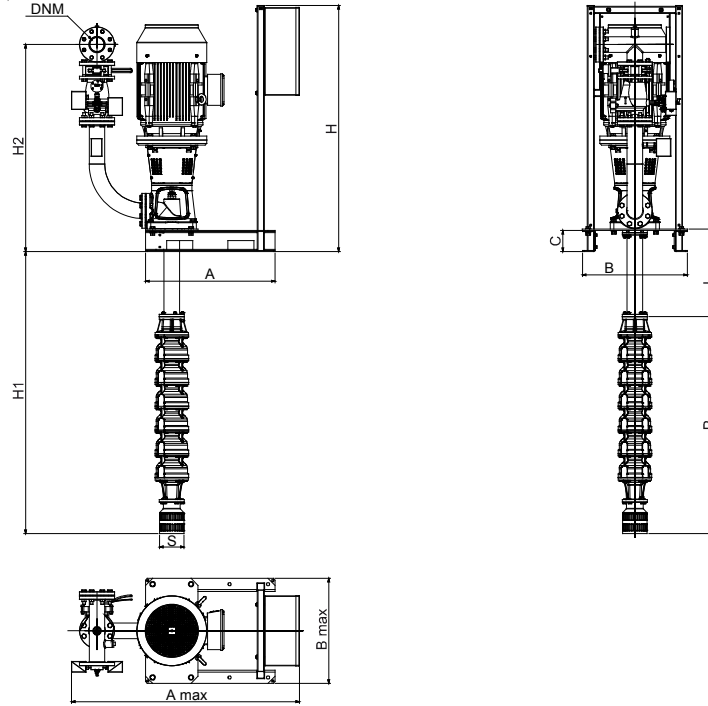

DIESEL ENGINE-DRIVEN PUMP MODULE

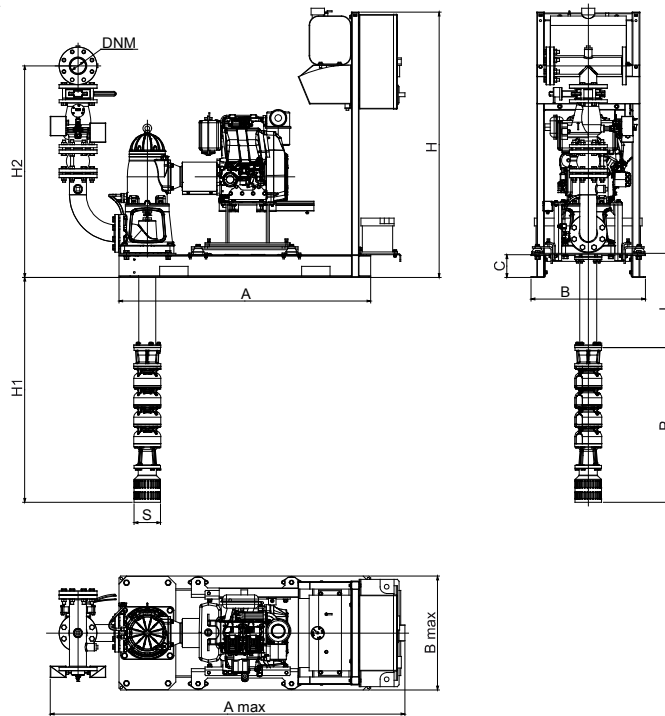


MODEL	A	A max	B	B max	C	H	H2	P	S	L	H1	A1	B1	B3	DNM
1KVT6 03/8 - ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE	1974	2218	-	1602	140	1406	1183	1230	-	2000	3110	-	-	-	DN 80
1KVT6 03/8 11 400/50 - ELECTRIC PUMP MODULE	740	1305	599	599	120	1406	1183	1230	Ø 140	2000	3110	-	-	-	DN 80
1KVT6 03/8 11 MD - DIESEL ENGINE-DRIVEN PUMP MODULE	1974	2218	603	603	140	1406	1183	1230	Ø 140	2000	3110	-	-	-	DN 80

The L and H1 values depend on the selected axis line (L).
7 different axis line lengths available on request.

1KVT6 13/4 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0 °C to +40 °C - Ambient temperature range: from +4 °C to +40 °C

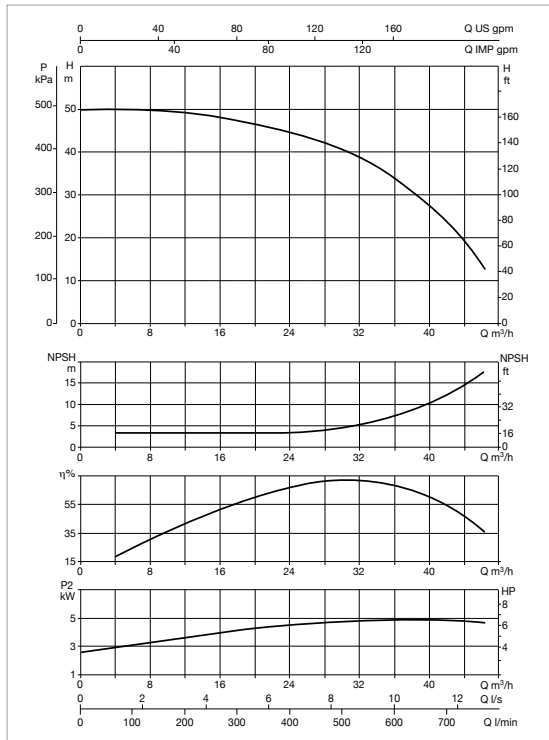

KVT EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	METER KIT
			kW	kW		
1 KVT6 13/4 7,5 400/50	3 x 400 V ~	DIVER 150 T	7,5	1	13,4	FLOW METER DN 80

KVT EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE-DRIVEN PUMP	P2 JOCKEY PUMP	FAN SURFACE	DIESEL COLLECTION TANK
			kW	kW		
1 KVT6 13/4 7,1 MD	1 x 220 - 240 V ~	DIVER 150 T	7,1	1	0,22 m²	20 l Impresa

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE

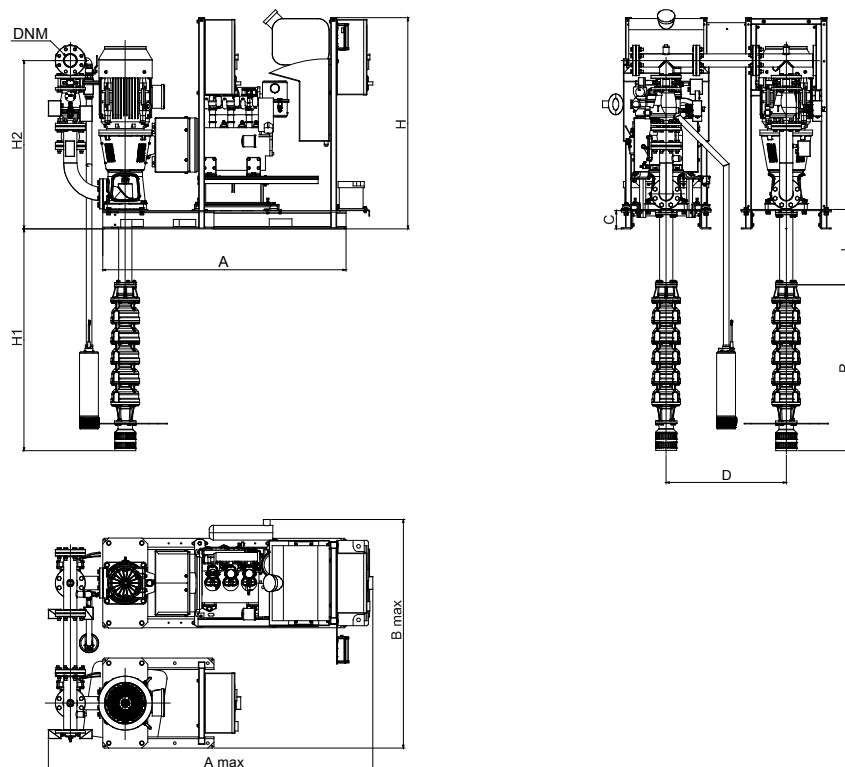


1KVT6 13/4 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

ELECTRIC PUMP MODULE

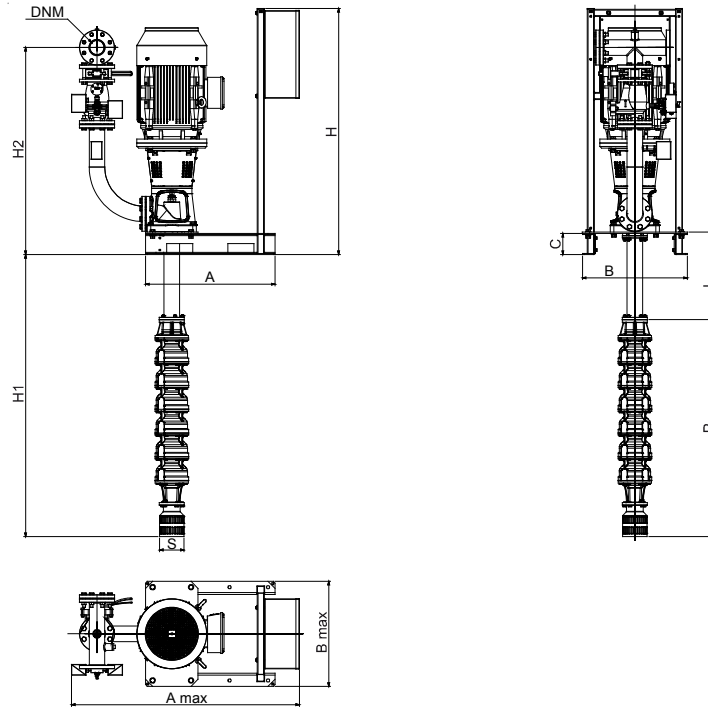

DIESEL ENGINE-DRIVEN PUMP MODULE

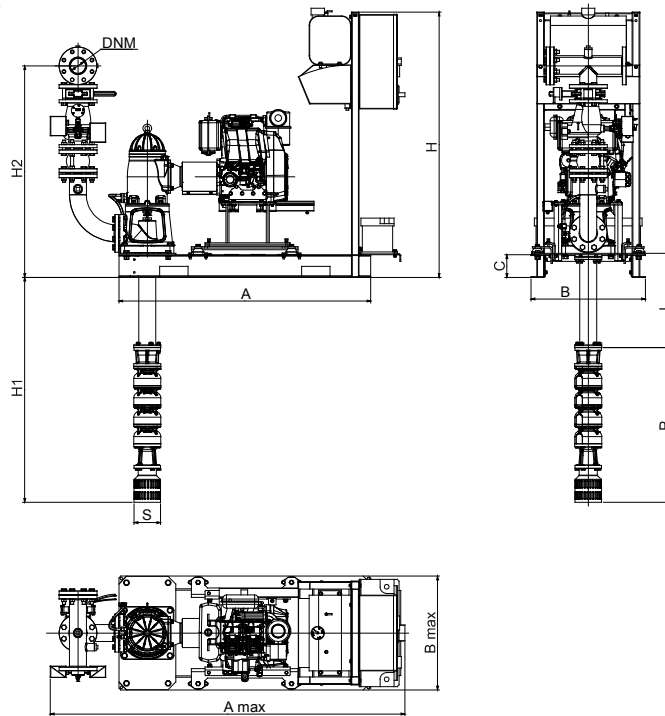


MODEL	A	A max	B	B max	C	H	H2	P	S	L	H1	A1	B1	B3	DNM
1KVT6 13/4 - ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE	1974	2218	-	1602	140	1406	1183	820	-	2000	2700	-	-	-	DN 80
1KVT6 13/4 7.5 400/50 - ELECTRIC PUMP MODULE	740	1305	599	599	120	1406	1183	820	Ø 140	2000	2700	-	-	-	DN 80
1KVT6 13/4 7.1 MD - DIESEL ENGINE-DRIVEN PUMP MODULE	1974	2218	603	603	140	1406	1183	820	Ø 140	2000	2700	-	-	-	DN 80

The L and H1 values depend on the selected axis line (L).
7 different axis line lengths available on request.

1KVT6 13/5 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0 °C to +40 °C - Ambient temperature range: from +4 °C to +40 °C

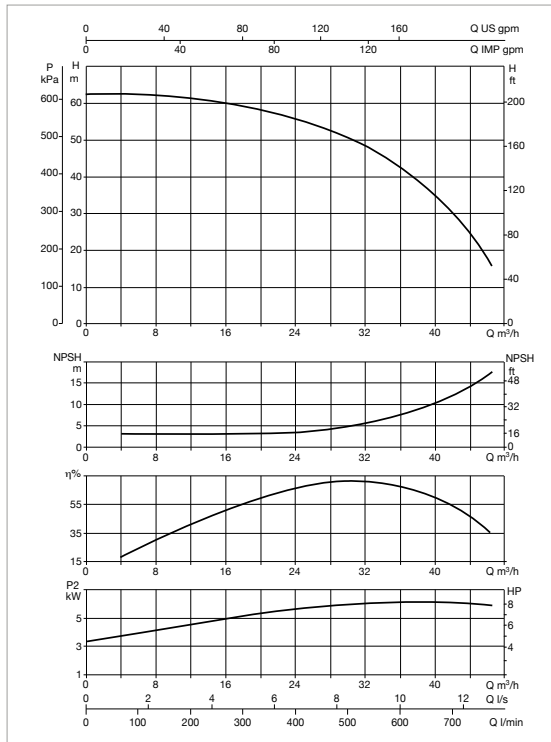

KVT EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	METER KIT
			kW	kW		
1 KVT6 13/5 7,5 400/50	3 x 400 V ~	DIVER 150 T	7,5	1	13,4	FLOW METER DN 80

KVT EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE-DRIVEN PUMP	P2 JOCKEY PUMP	FAN SURFACE	DIESEL COLLECTION TANK
			kW	kW		
1 KVT6 13/5 11 MD	1 x 220 - 240 V ~	DIVER 150 T	11	1	0,22 m²	20 l included

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE

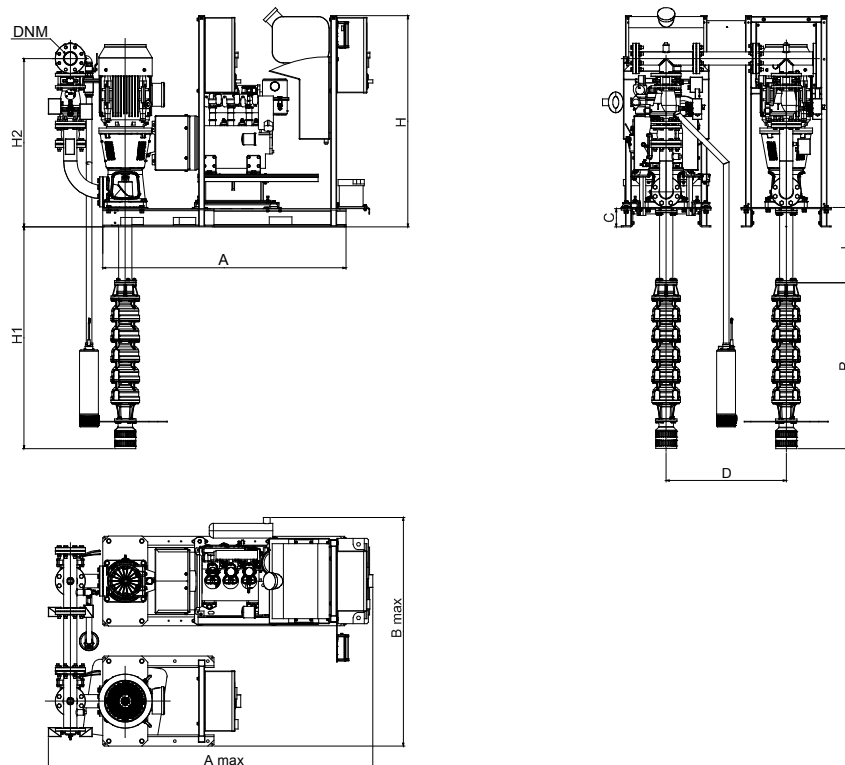


1KVT6 13/5 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

ELECTRIC PUMP MODULE

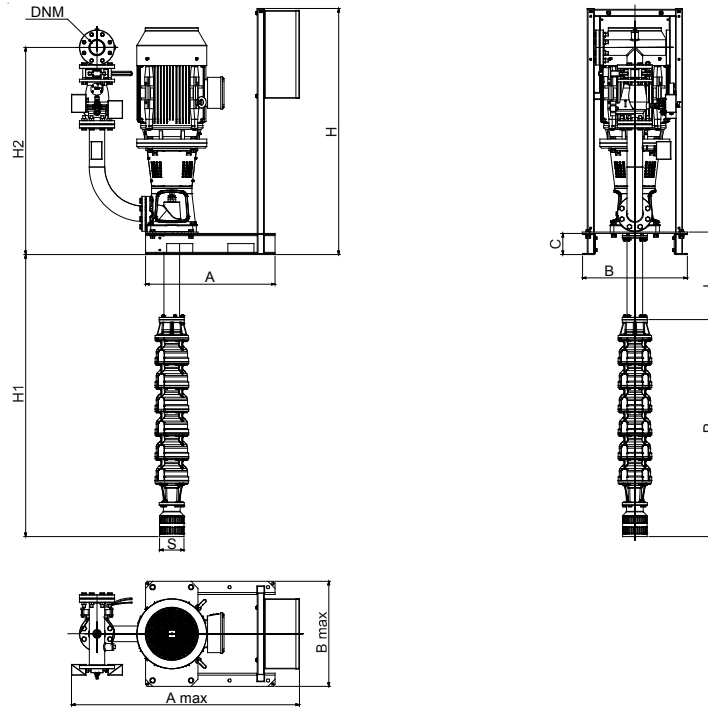

DIESEL ENGINE-DRIVEN PUMP MODULE

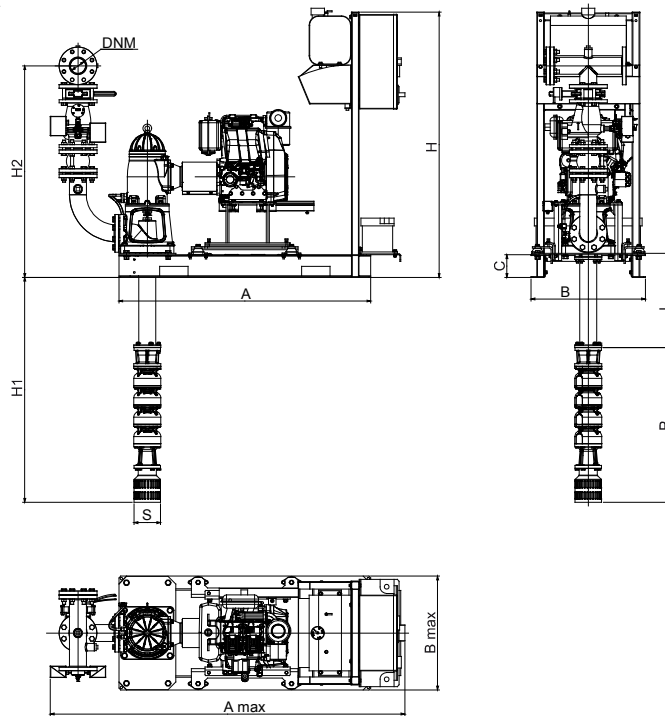


MODEL	A	A max	B	B max	C	H	H2	P	S	L	H1	A1	B1	B3	DNM
1KVT6 13/5 - ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE	1974	2218	-	1602	140	1406	1183	922	-	2000	2802	-	-	-	DN 80
1KVT6 13/5 7,5 400/50 - ELECTRIC PUMP MODULE	740	1305	599	599	120	1406	1183	922	Ø 140	2000	2802	-	-	-	DN 80
1KVT6 13/5 11 MD - DIESEL ENGINE-DRIVEN PUMP MODULE	1974	2218	603	603	140	1406	1183	922	Ø 140	2000	2802	-	-	-	DN 80

The L and H1 values depend on the selected axis line (L).
7 different axis line lengths available on request.



1KVT6 13/6 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0 °C to +40 °C - Ambient temperature range: from +4 °C to +40 °C

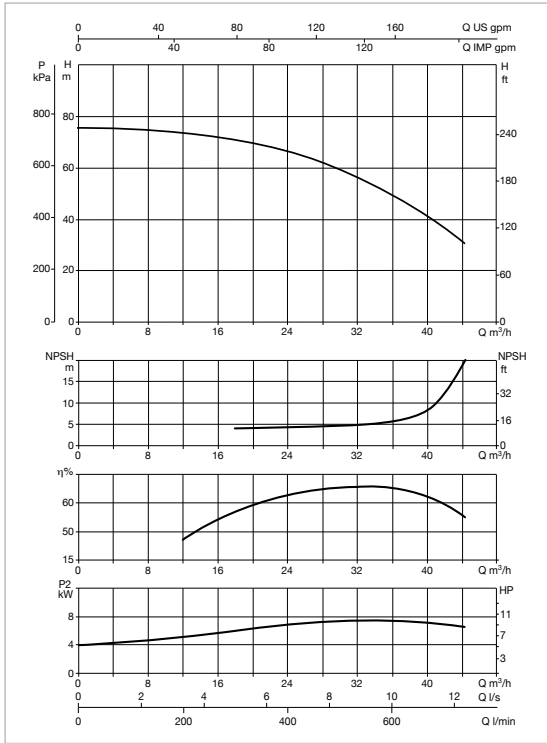

KVT EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	METER KIT
			kW	kW		
1 KVT6 13/6 11 400/50	3 x 400 V ~	DIVER 150 T	11	1	19,4	FLOW METER DN 80

KVT EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE-DRIVEN PUMP	P2 JOCKEY PUMP	FAN SURFACE	DIESEL COLLECTION TANK
			kW	kW		
1 KVT6 13/6 11 MD	1 x 220 - 240 V ~	DIVER 150 T	11	1	0,22 m²	20 l included

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE

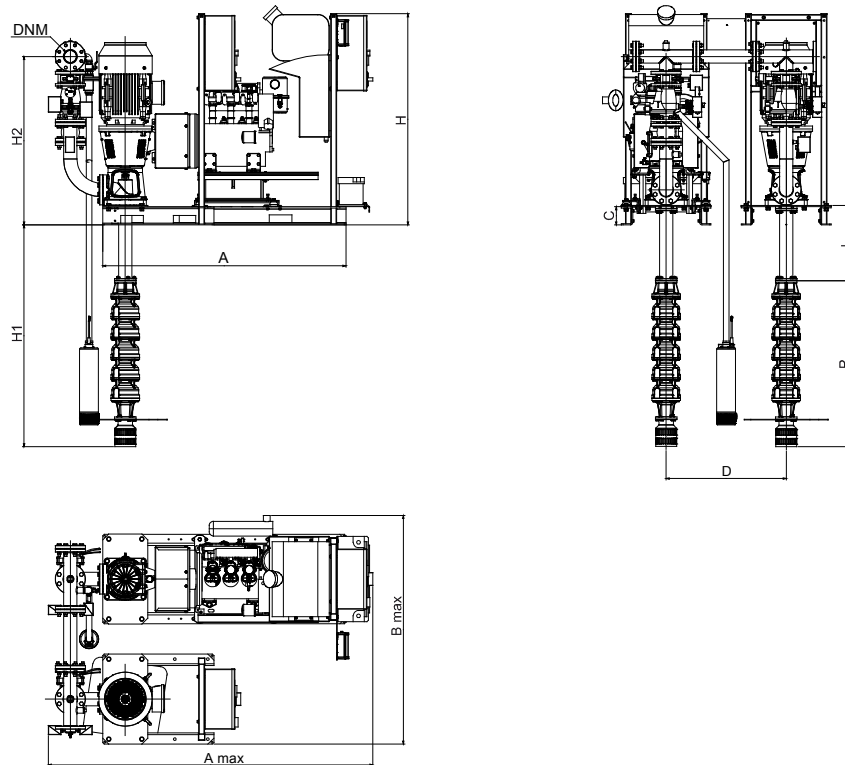


1KVT6 13/6 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

ELECTRIC PUMP MODULE

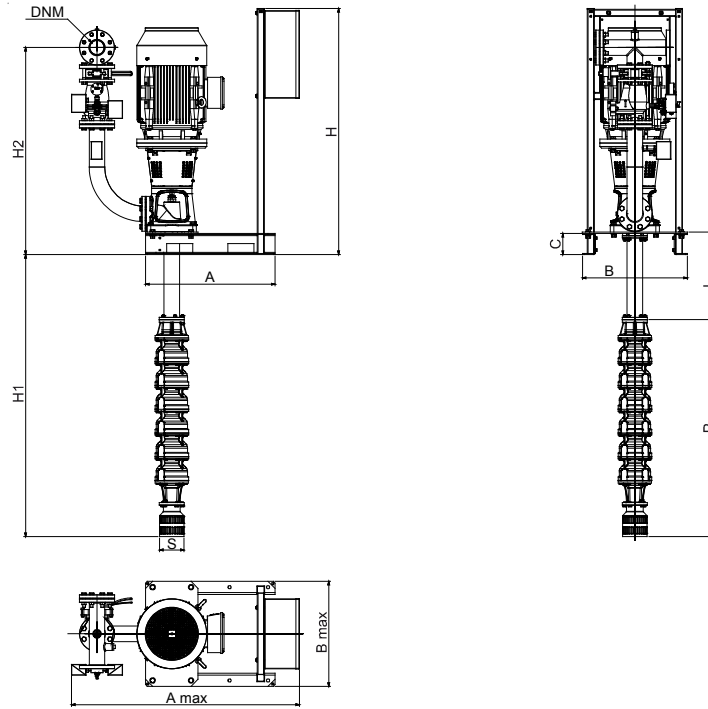

DIESEL ENGINE-DRIVEN PUMP MODULE

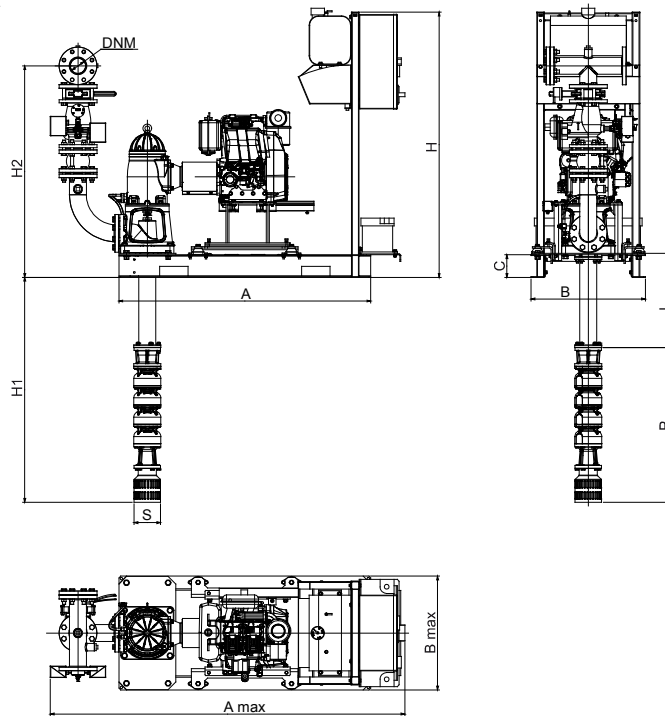


MODEL	A	A max	B	B max	C	H	H2	P	S	L	H1	A1	B1	B3	DNM
1KVT6 13/6 - ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE	1974	2218	-	1602	140	1406	1183	1025	-	2000	2905	-	-	-	DN 80
1KVT6 13/6 11 400/50 - ELECTRIC PUMP MODULE	740	1305	599	599	120	1406	1183	1025	Ø 140	2000	2905	-	-	-	DN 80
1KVT6 13/6 11 MD - DIESEL ENGINE-DRIVEN PUMP MODULE	1974	2218	603	603	140	1406	1183	1025	Ø 140	2000	2905	-	-	-	DN 80

The L and H1 values depend on the selected axis line (L).
7 different axis line lengths available on request.

1KVT6 13/7 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0 °C to +40 °C - Ambient temperature range: from +4 °C to +40 °C

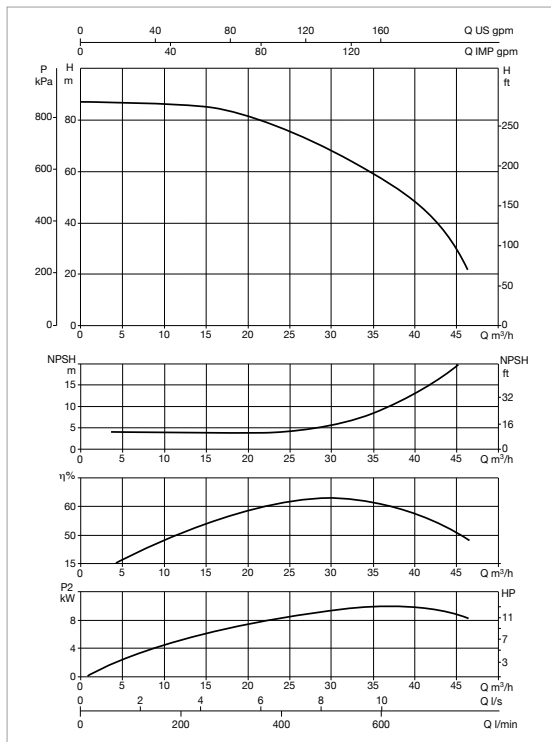

KVT EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	METER KIT
			kW	kW		
1 KVT6 13/7 11 400/50	3 x 400 V ~	DIVER 200 T	11	1,5	19,4	FLOW METER DN 80

KVT EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE-DRIVEN PUMP	P2 JOCKEY PUMP	FAN SURFACE	DIESEL COLLECTION TANK
			kW	kW		
1 KVT6 13/7 11 MD	1 x 220 - 240 V ~	DIVER 200 T	11	1,5	0,22 m²	20 l included

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE

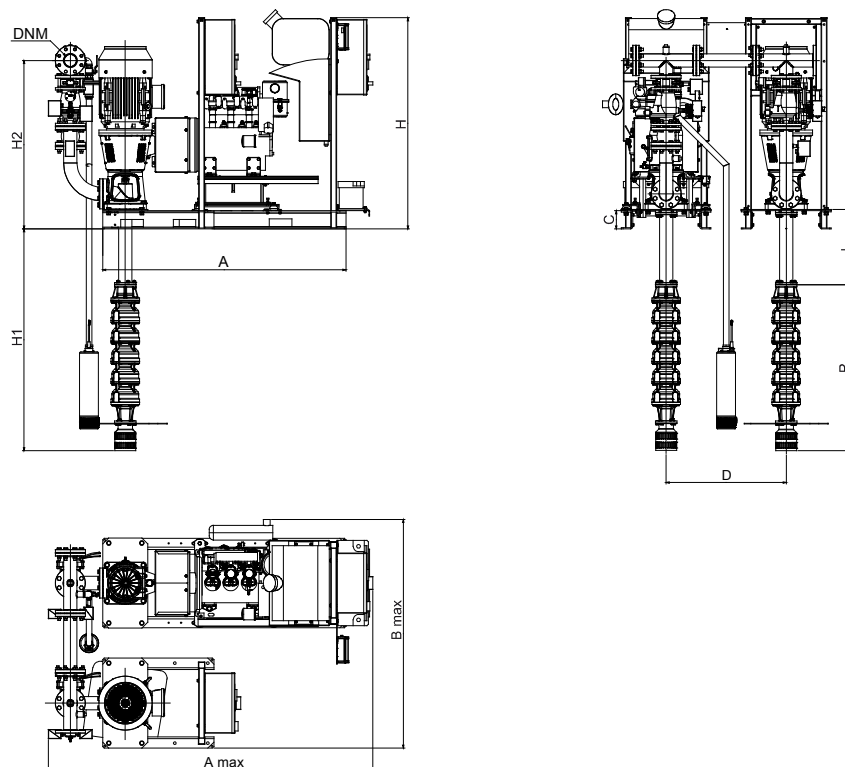


1KVT6 13/7 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

ELECTRIC PUMP MODULE

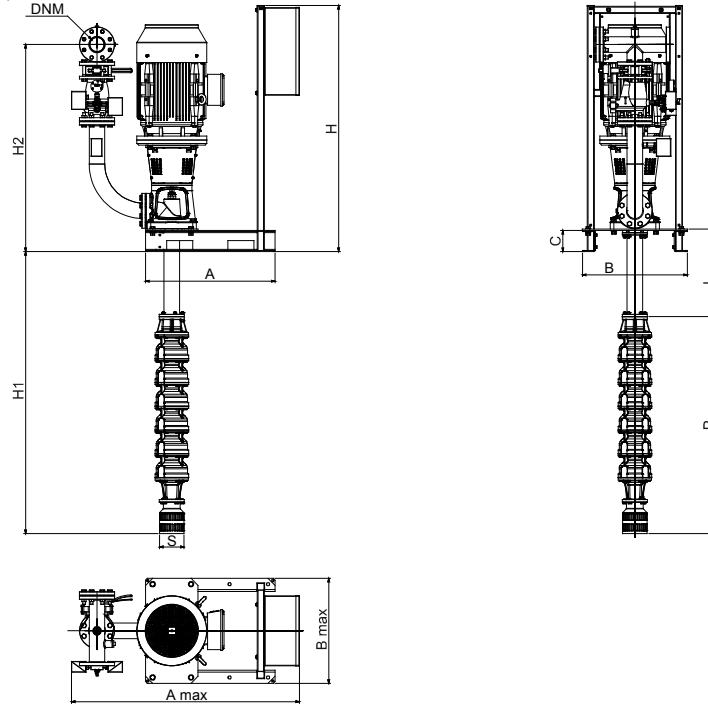

DIESEL ENGINE-DRIVEN PUMP MODULE

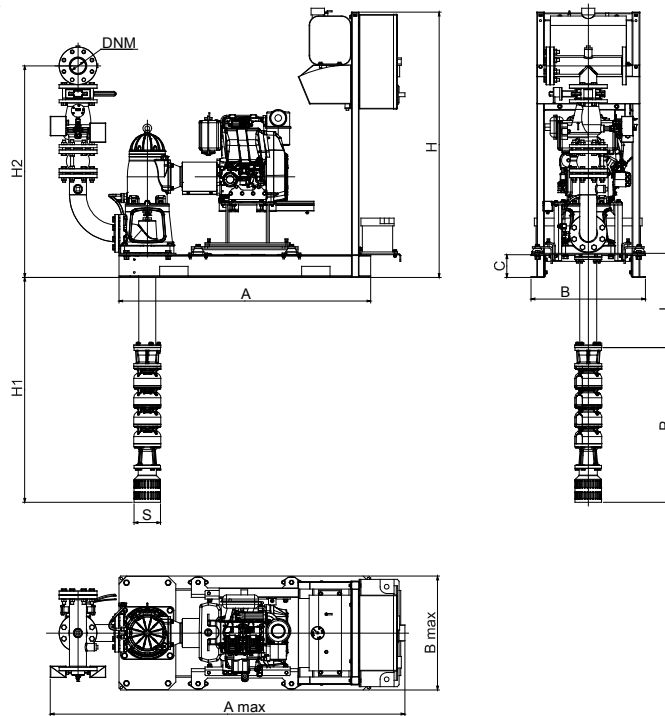


MODEL	A	A max	B	B max	C	H	H2	P	S	L	H1	A1	B1	B3	DNM
1KVT6 13/7 - ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE	1974	2218	-	1602	140	1406	1183	1127	-	2000	3007	-	-	-	DN 80
1KVT6 13/7 11 400/50 - ELECTRIC PUMP MODULE	740	1305	599	599	120	1406	1183	1127	∅ 140	2000	3007	-	-	-	DN 80
1KVT6 13/7 11 MD - DIESEL ENGINE-DRIVEN PUMP MODULE	1974	2218	603	603	140	1406	1183	1127	∅ 140	2000	3007	-	-	-	DN 80

The L and H1 values depend on the selected axis line (L).
7 different axis line lengths available on request.

1KVT6 13/8 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0 °C to +40 °C - Ambient temperature range: from +4 °C to +40 °C

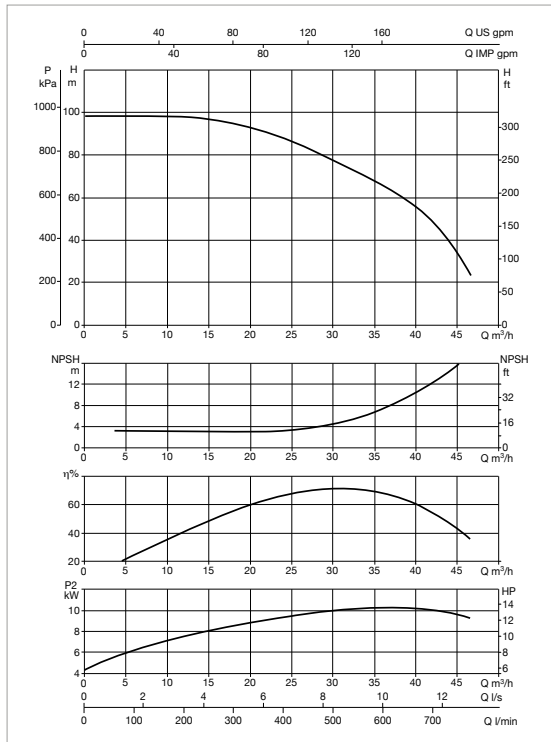

KVT EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	METER KIT
			kW	kW		
1 KVT6 13/8 15 400/50	3 x 400 V ~	DIVER 200 T	15	1,5	26,5	FLOW METER DN 80

KVT EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE-DRIVEN PUMP	P2 JOCKEY PUMP	FAN SURFACE	DIESEL COLLECTION TANK
			kW	kW		
1 KVT6 13/8 15 MD	1 x 220 - 240 V ~	DIVER 200 T	15	1,5	0,22 m²	50 l included

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE

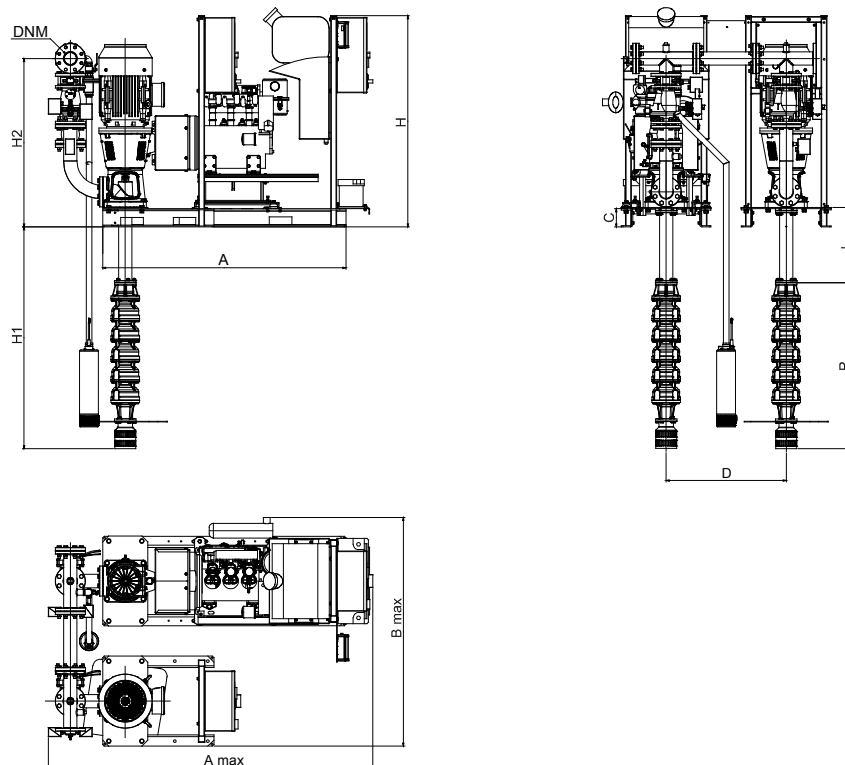


1KVT6 13/8 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

ELECTRIC PUMP MODULE

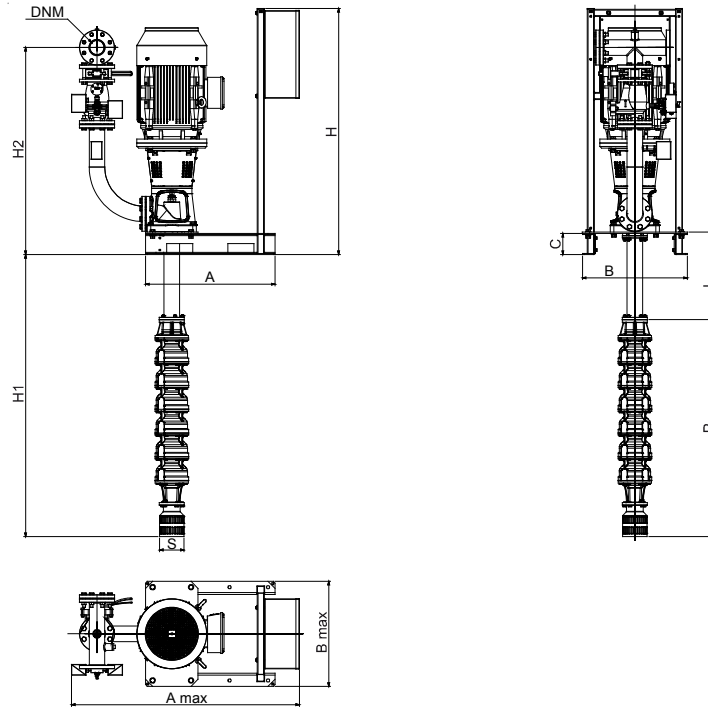

DIESEL ENGINE-DRIVEN PUMP MODULE

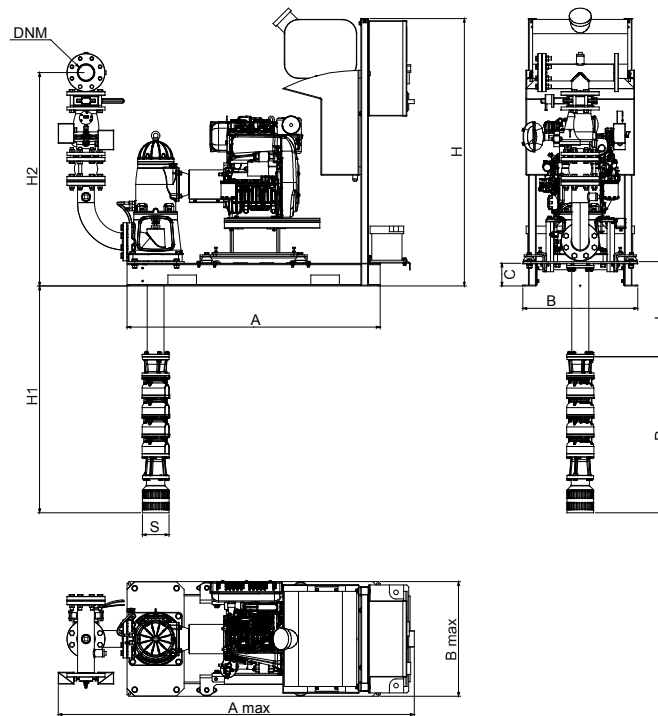


MODEL	A	A max	B	B max	C	H	H2	P	S	L	H1	A1	B1	B3	DNM
1KVT6 13/8 - ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE	1974	2218	-	1602	140	1406	1183	1230	-	2000	3110	-	-	-	DN 80
1KVT6 13/8 15 400/50 - ELECTRIC PUMP MODULE	740	1334	599	599	120	1406	1183	1230	∅ 140	2000	3110	-	-	-	DN 80
1KVT6 13/8 15 MD - DIESEL ENGINE-DRIVEN PUMP MODULE	1974	2218	603	603	140	1406	1121	1230	∅ 140	2000	3110	-	-	-	DN 80

The L and H1 values depend on the selected axis line (L).
7 different axis line lengths available on request.

1KVT6 13/9 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0 °C to +40 °C - Ambient temperature range: from +4 °C to +40 °C

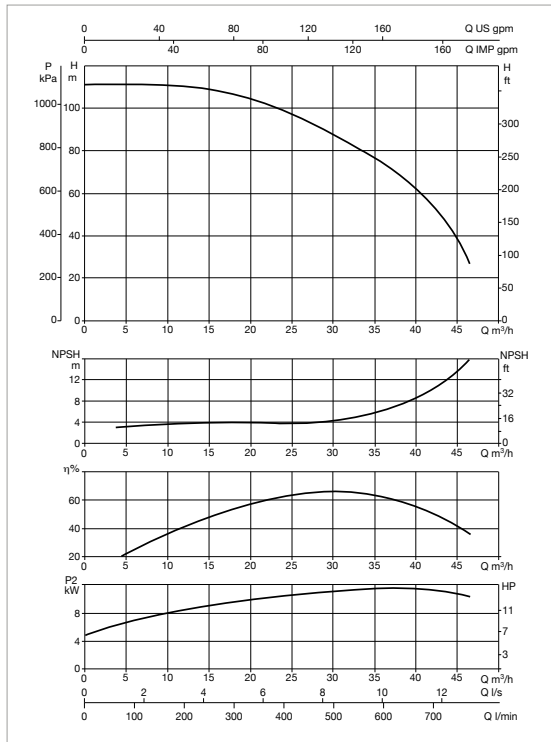

KVT EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	METER KIT
			kW	kW		
1 KVT6 13/9 15 400/50	3 x 400 V ~	DIVER 200 T	15	1,5	26,5	FLOW METER DN 80

KVT EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE-DRIVEN PUMP	P2 JOCKEY PUMP	FAN SURFACE	DIESEL COLLECTION TANK
			kW	kW		
1 KVT6 13/9 15 MD	1 x 220 - 240 V ~	DIVER 200 T	15	1,5	0,22 m²	50 l included

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE

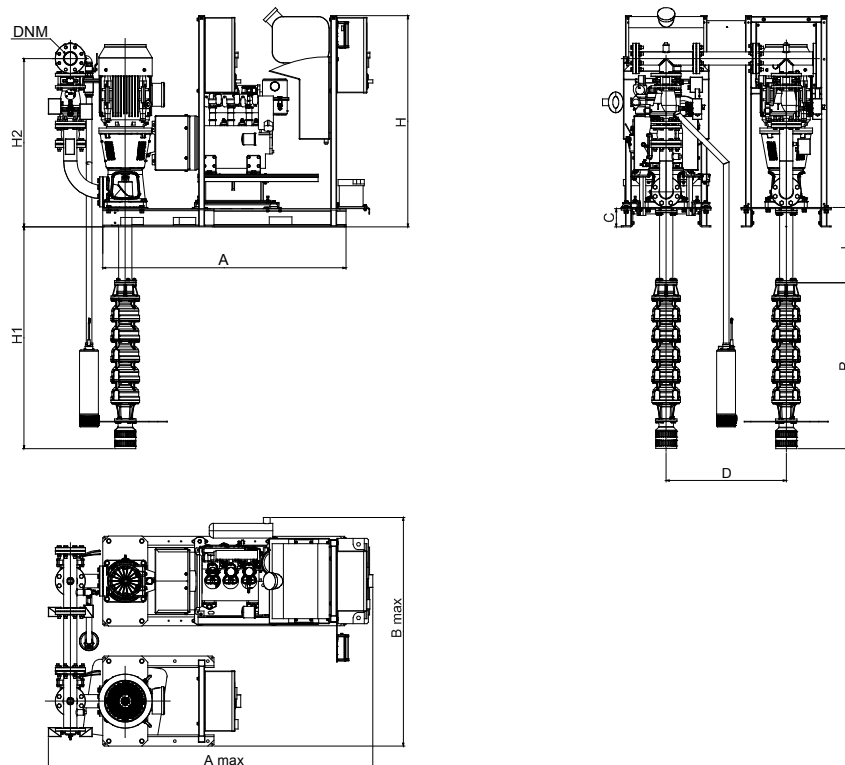


1KVT6 13/9 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

ELECTRIC PUMP MODULE

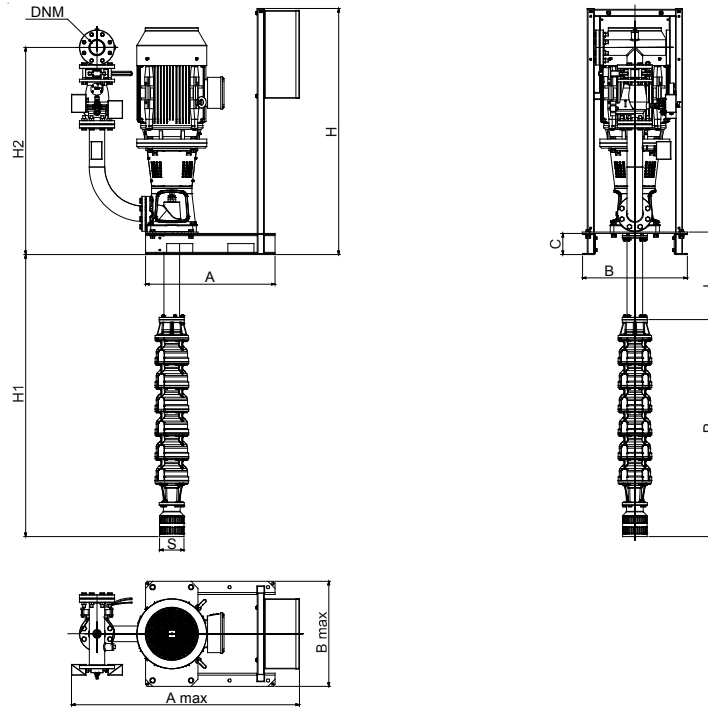

DIESEL ENGINE-DRIVEN PUMP MODULE

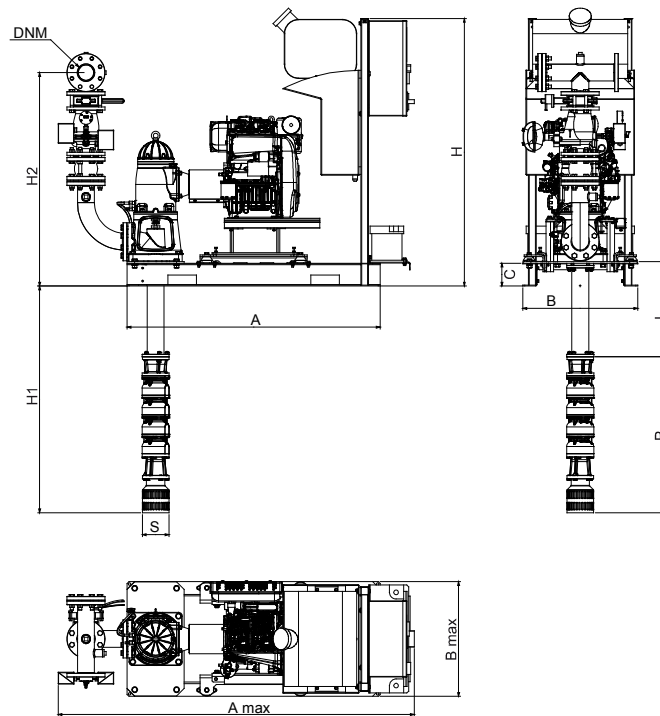


MODEL	A	A max	B	B max	C	H	H2	P	S	L	H1	A1	B1	B3	DNM
1KVT6 13/9 - ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE	1974	2218	-	1602	140	1406	1183	1332	-	2000	3212	-	-	-	DN 80
1KVT6 13/9 15 400/50 - ELECTRIC PUMP MODULE	740	1334	599	599	120	1406	1183	1332	Ø 140	2000	3212	-	-	-	DN 80
1KVT6 13/9 15 MD - DIESEL ENGINE-DRIVEN PUMP MODULE	1974	2218	603	603	140	1406	1121	1332	Ø 140	2000	3212	-	-	-	DN 80

The L and H1 values depend on the selected axis line (L).
7 different axis line lengths available on request.

1KVT6 23/4 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0 °C to +40 °C - Ambient temperature range: from +4 °C to +40 °C

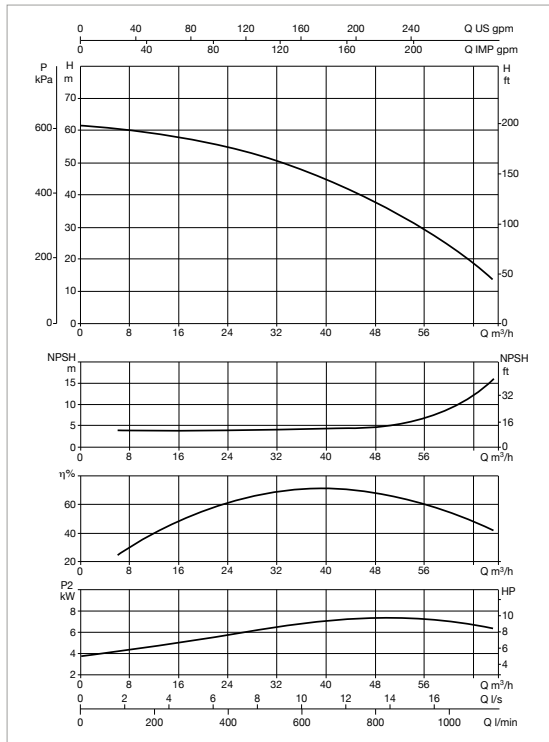

KVT EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	METER KIT
			kW	kW		
1 KVT6 23/4 11 400/50	3 x 400 V ~	DIVER 150 T	11	1	19,4	FLOW METER DN 80

KVT EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE-DRIVEN PUMP	P2 JOCKEY PUMP	FAN SURFACE	DIESEL COLLECTION TANK
			kW	kW		
1 KVT6 23/4 11 MD	1 x 220 - 240 V ~	DIVER 150 T	11	1	0,22 m²	20 l included

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE

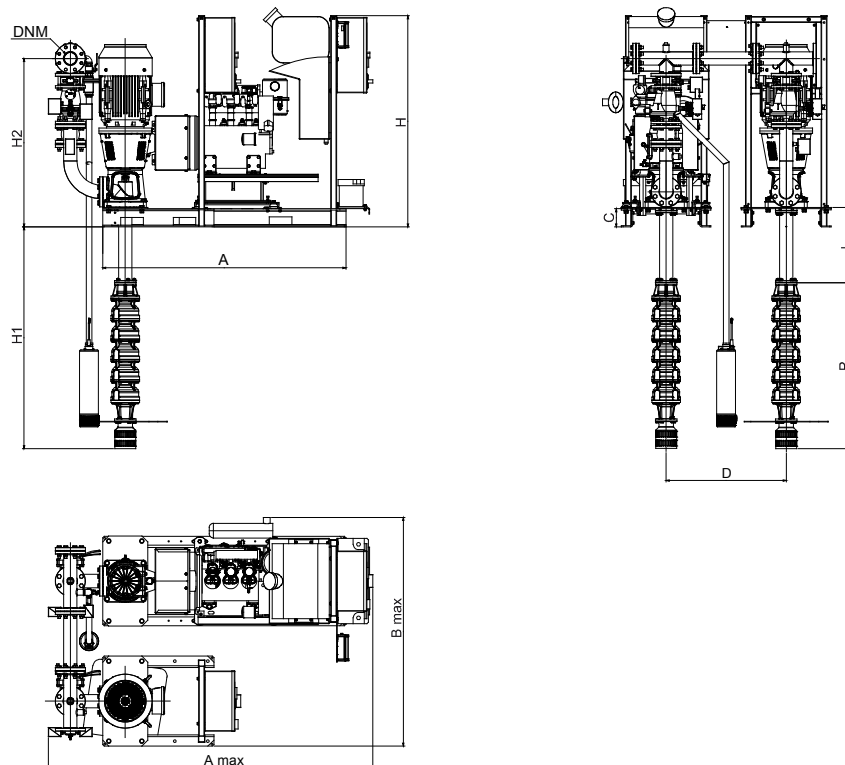


1KVT6 23/4 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

ELECTRIC PUMP MODULE

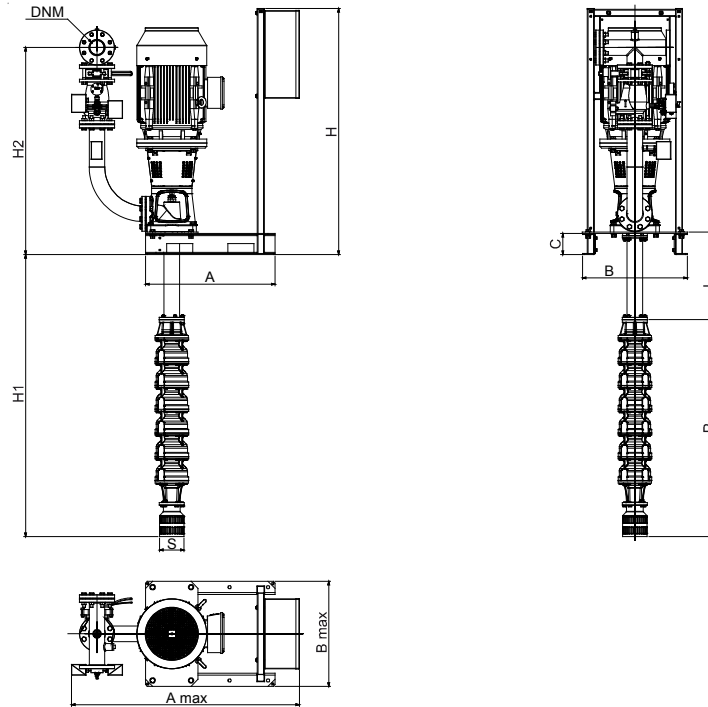

DIESEL ENGINE-DRIVEN PUMP MODULE

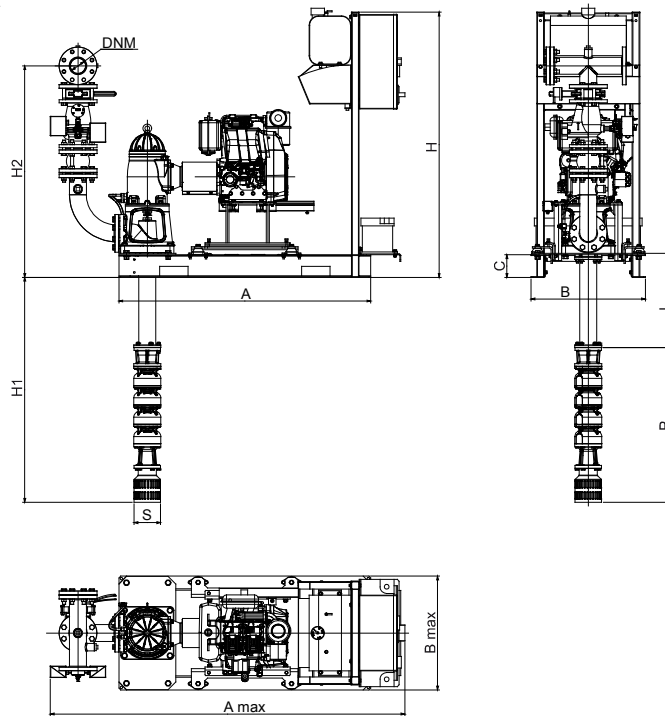


MODEL	A	A max	B	B max	C	H	H2	P	S	L	H1	A1	B1	B3	DNM
1KVT6 23/4 - ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE	1974	2218	-	1602	140	1406	1183	820	-	2000	2700	-	-	-	DN 80
1KVT6 23/4 11 400/50 - ELECTRIC PUMP MODULE	740	1305	599	599	120	1406	1183	820	Ø 140	2000	2700	-	-	-	DN 80
1KVT6 23/4 11 MD - DIESEL ENGINE-DRIVEN PUMP MODULE	1974	2218	603	603	140	1406	1183	820	Ø 140	2000	2700	-	-	-	DN 80

The L and H1 values depend on the selected axis line (L).
7 different axis line lengths available on request.

1KVT6 23/5 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0 °C to +40 °C - Ambient temperature range: from +4 °C to +40 °C

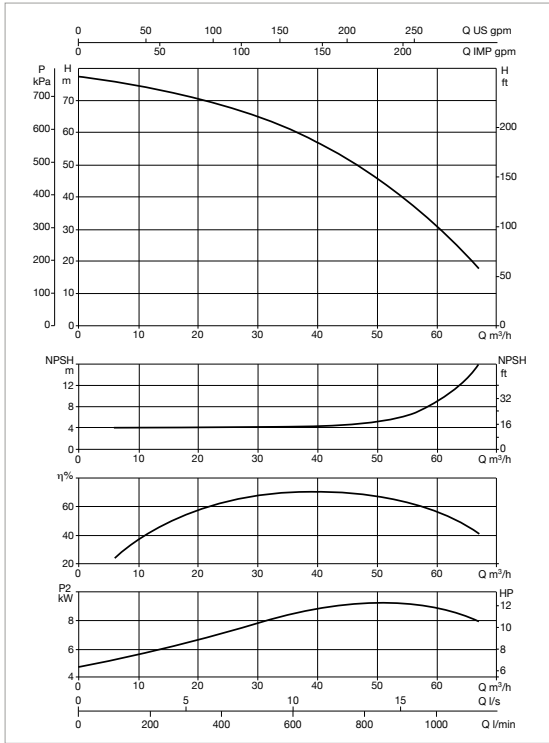

KVT EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	METER KIT
			kW	kW		
1 KVT6 23/5 11 400/50	3 x 400 V ~	DIVER 150 T	11	1	19,4	FLOW METER DN 80

KVT EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE-DRIVEN PUMP	P2 JOCKEY PUMP	FAN SURFACE	DIESEL COLLECTION TANK
			kW	kW		
1 KVT6 23/5 15 MD	1 x 220 - 240 V ~	DIVER 150 T	15	1	0,22 m²	50 l included

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE

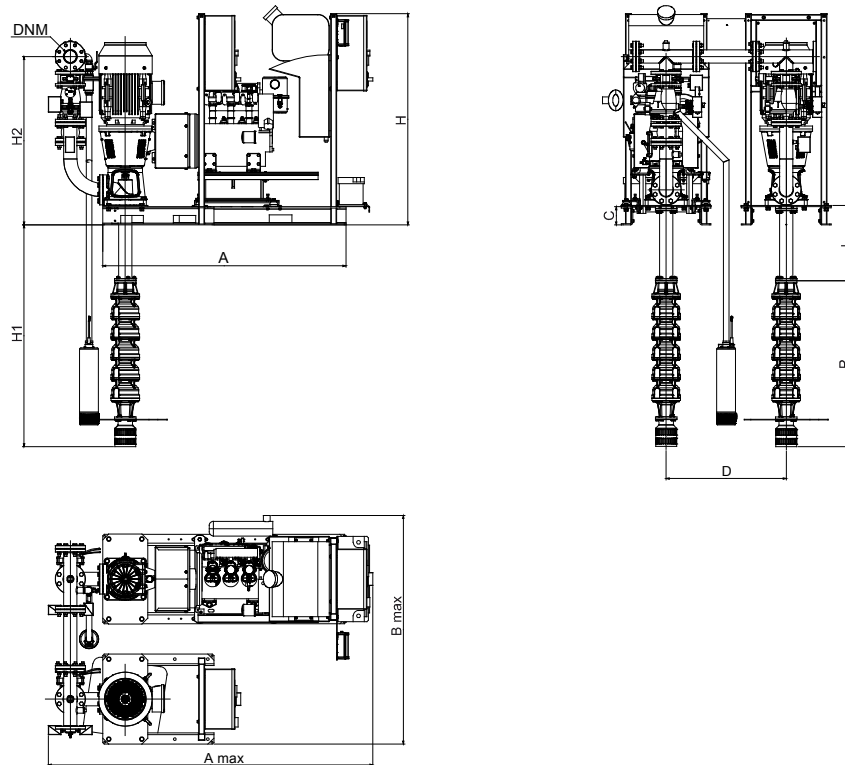


1KVT6 23/5 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

ELECTRIC PUMP MODULE

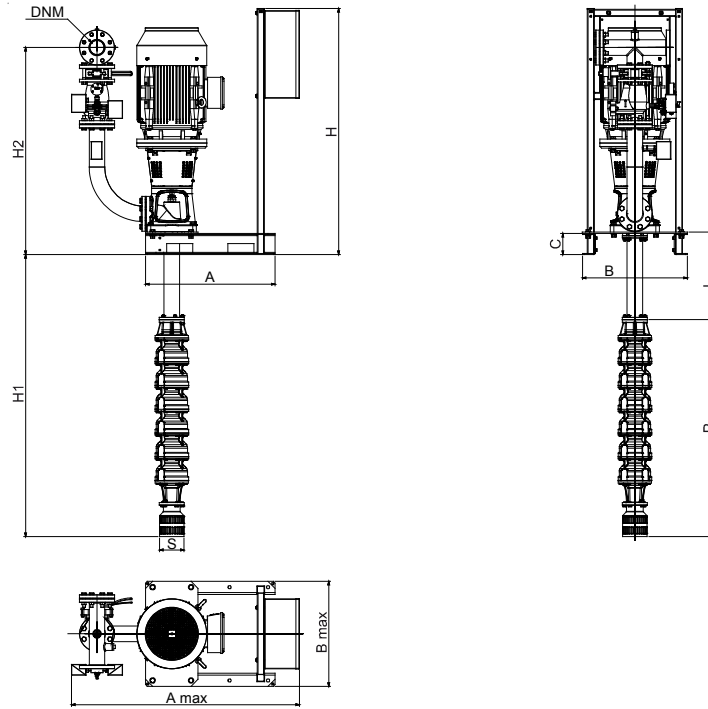

DIESEL ENGINE-DRIVEN PUMP MODULE

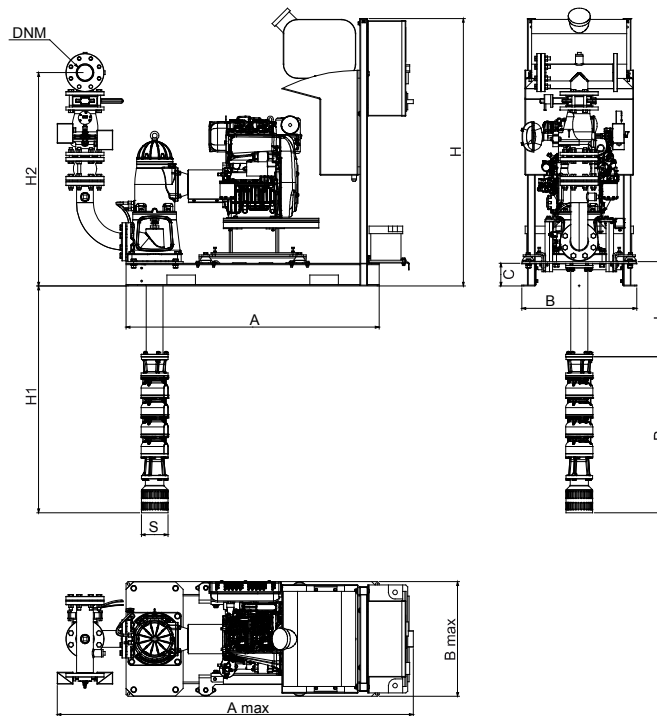


MODEL	A	A max	B	B max	C	H	H2	P	S	L	H1	A1	B1	B3	DNM
1KVT6 23/5 - ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE	1974	2218	-	1602	140	1406	1183	922	-	2000	2802	-	-	-	DN 80
1KVT6 23/5 11 400/50 - ELECTRIC PUMP MODULE	740	1305	599	599	120	1406	1183	922	Ø 140	2000	2802	-	-	-	DN 80
1KVT6 23/5 15 MD - DIESEL ENGINE-DRIVEN PUMP MODULE	1974	2218	603	603	140	1406	1121	922	Ø 140	2000	2802	-	-	-	DN 80

The L and H1 values depend on the selected axis line (L).
7 different axis line lengths available on request.

1KVT6 23/6 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0 °C to +40 °C - Ambient temperature range: from +4 °C to +40 °C

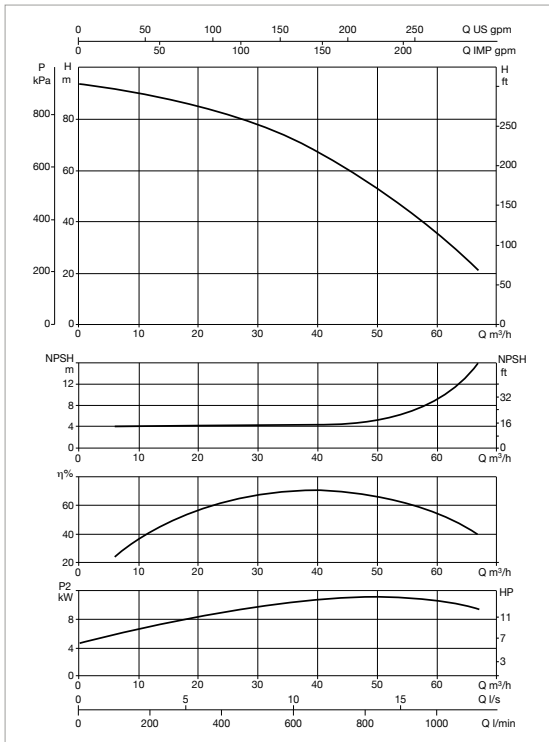

KVT EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	METER KIT
			kW	kW		
1 KVT6 23/6 15 400/50	3 x 400 V ~	DIVER 150 T	15	1	26,5	FLOW METER DN 80

KVT EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE-DRIVEN PUMP	P2 JOCKEY PUMP	FAN SURFACE	DIESEL COLLECTION TANK
			kW	kW		
1 KVT6 23/6 15 MD	1 x 220 - 240 V ~	DIVER 150 T	15	1	0,22 m²	50 l included

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE

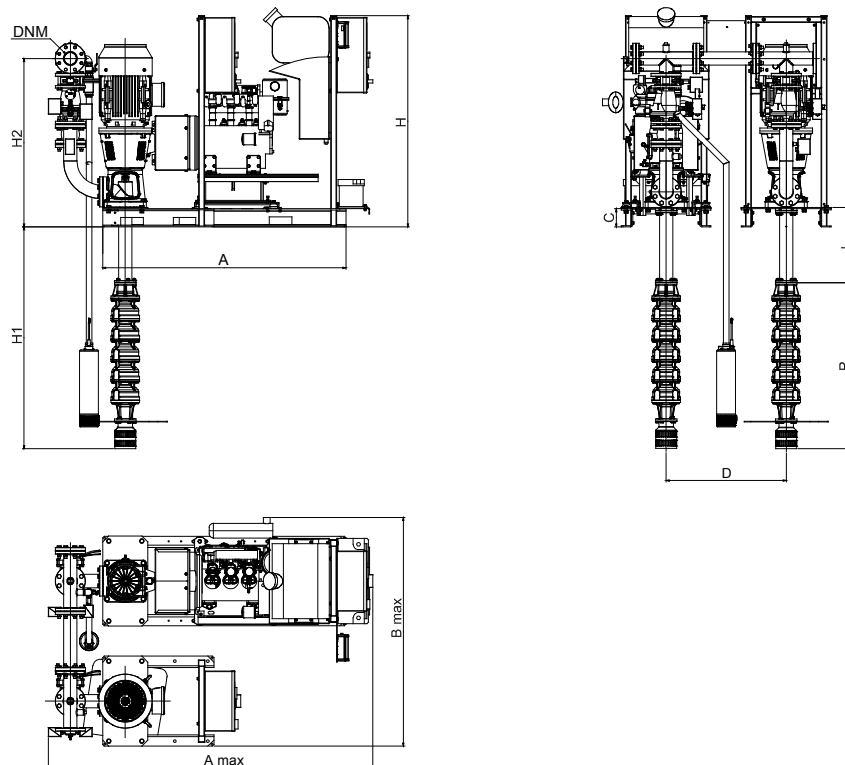


1KVT6 23/6 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

ELECTRIC PUMP MODULE

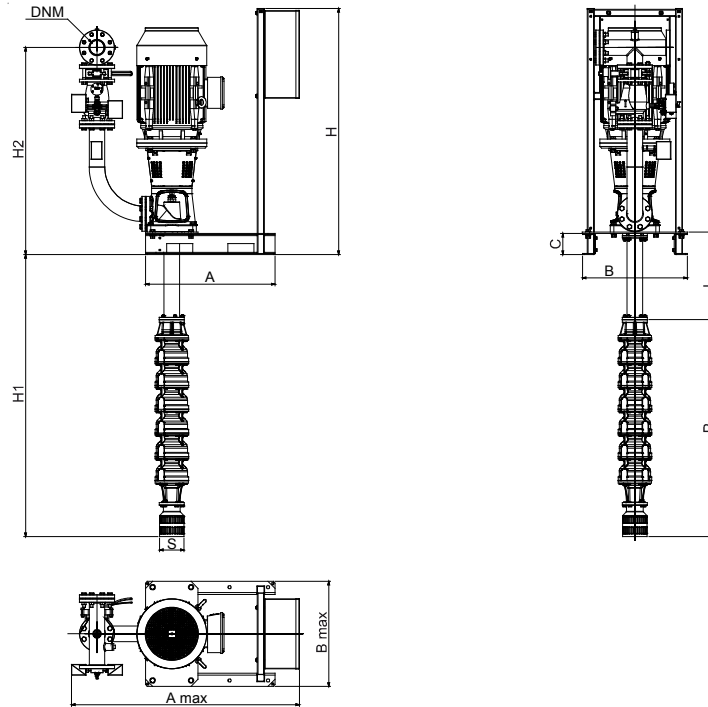

DIESEL ENGINE-DRIVEN PUMP MODULE

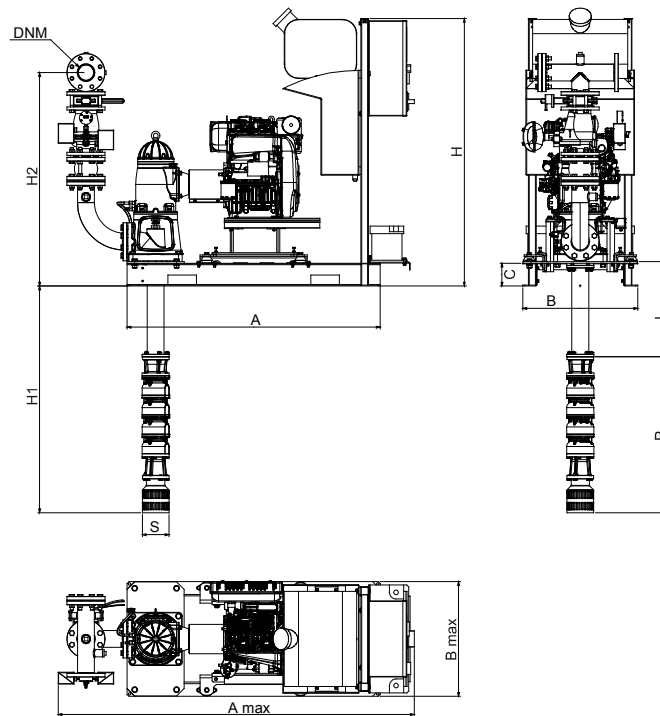


MODEL	A	A max	B	B max	C	H	H2	P	S	L	H1	A1	B1	B3	DNM
1KVT6 23/6 - ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE	1974	2218	-	1602	140	1406	1183	820	-	2000	2700	-	-	-	DN 80
1KVT6 23/6 15 400/50 - ELECTRIC PUMP MODULE	740	1334	599	599	120	1406	1183	1025	Ø 140	2000	2905	-	-	-	DN 80
1KVT6 23/6 15 MD - DIESEL ENGINE-DRIVEN PUMP MODULE	1974	2218	603	603	140	1406	1121	820	Ø 140	2000	2700	-	-	-	DN 80

The L and H1 values depend on the selected axis line (L).
7 different axis line lengths available on request.

1KVT6 23/7 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0 °C to +40 °C - Ambient temperature range: from +4 °C to +40 °C

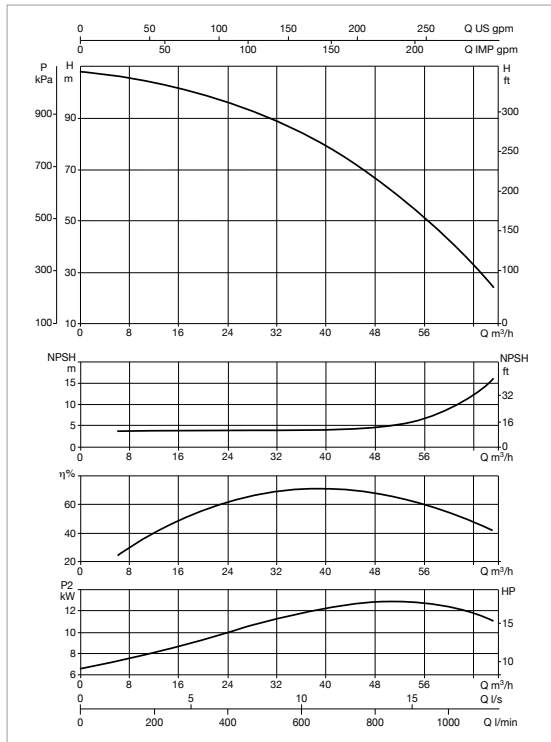

KVT EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	METER KIT
			KW	KW		
1 KVT6 23/7 18,5 400/50	3 x 400 V ~	DIVER 200 T	18,5	1,5	32	FLOW METER DN 80

KVT EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE-DRIVEN PUMP	P2 JOCKEY PUMP	FAN SURFACE	DIESEL COLLECTION TANK
			KW	KW		
1 KVT6 23/7 19 MD	1 x 220 - 240 V ~	DIVER 200 T	19	1,5	0,22 m²	50 l included

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE

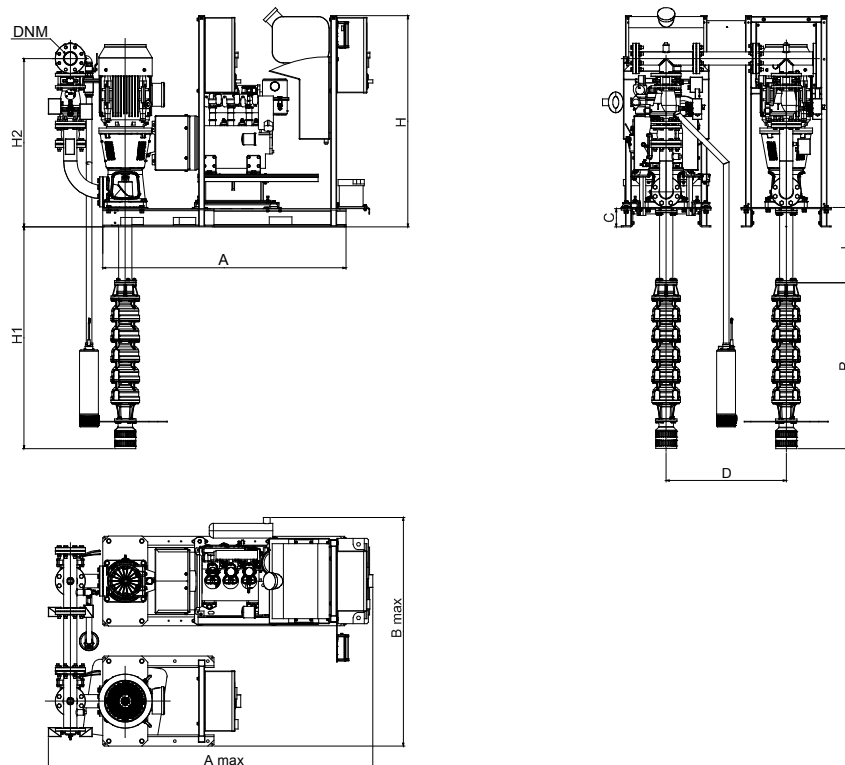


1KVT6 23/7 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

ELECTRIC PUMP MODULE

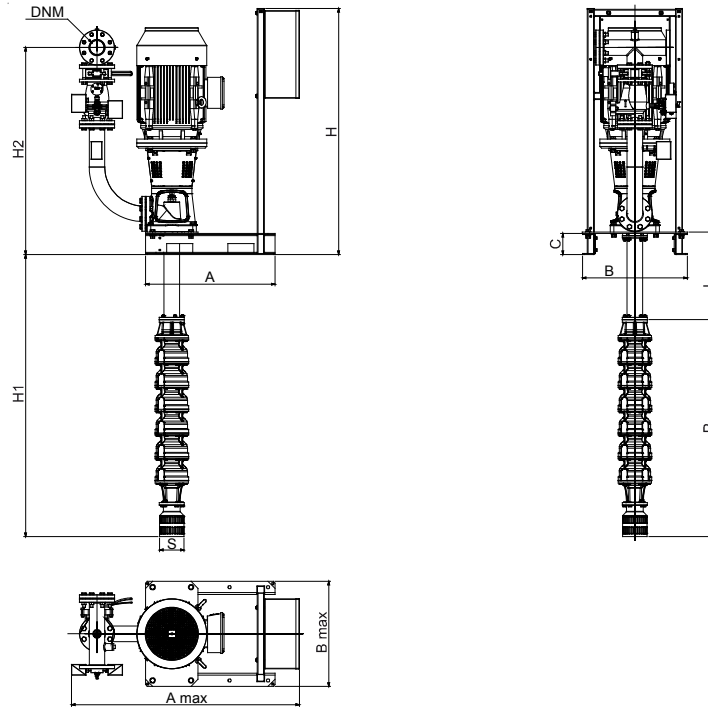

DIESEL ENGINE-DRIVEN PUMP MODULE

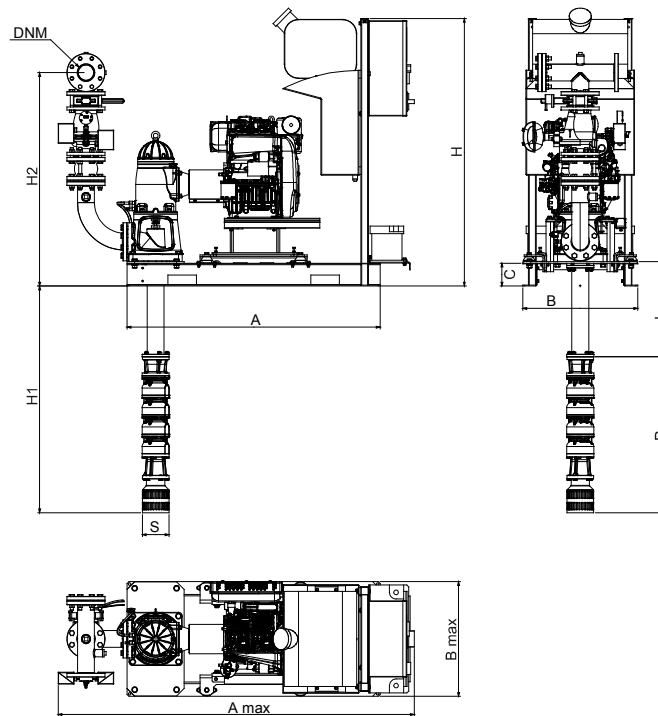


MODEL	A	A max	B	B max	C	H	H2	P	S	L	H1	A1	B1	B3	DNM
1KVT6 23/7 - ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE	1974	2218	-	1637	140	1406	1183	1127	-	2000	3007	-	-	-	DN 80
1KVT6 23/7 30 18.5 400/50 - ELECTRIC PUMP MODULE	740	1337	599	599	120	1406	1183	1127	Ø 140	2000	3007	-	-	-	DN 80
1KVT6 23/7 19 MD - DIESEL ENGINE-DRIVEN PUMP MODULE	1974	2218	595	638	140	1406	1121	1127	Ø 140	2000	3007	-	-	-	DN 80

The L and H1 values depend on the selected axis line (L).
7 different axis line lengths available on request.

1KVT8 13N/4 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0 °C to +40 °C - Ambient temperature range: from +4 °C to +40 °C

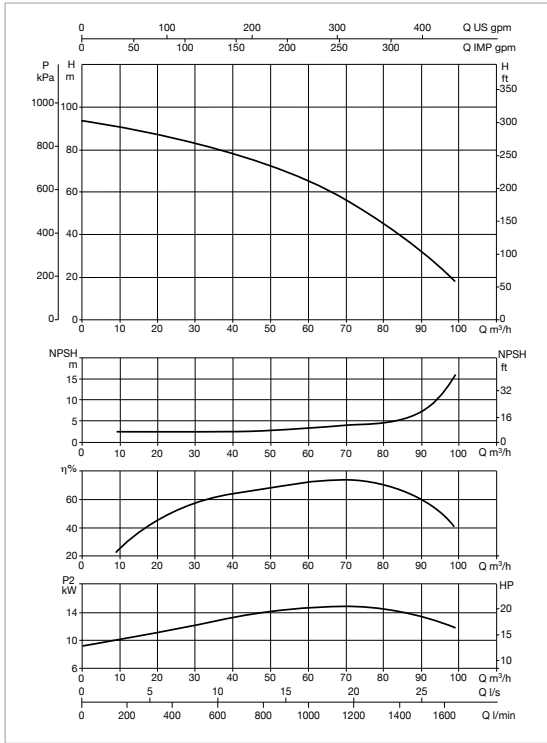

KVT EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	METER KIT
			kW	kW		
1 KVT8 13N/4 18,5 400/50	3 x 400 V ~	DIVER 200 T	18,5	1,5	32	FLOW METER DN 80

KVT EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE-DRIVEN PUMP	P2 JOCKEY PUMP	FAN SURFACE	DIESEL COLLECTION TANK
			kW	kW		
1 KVT8 13N/4 19 MD	1 x 220 - 240 V ~	DIVER 200 T	19	1,5	0,22 m²	50 l included

*Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE

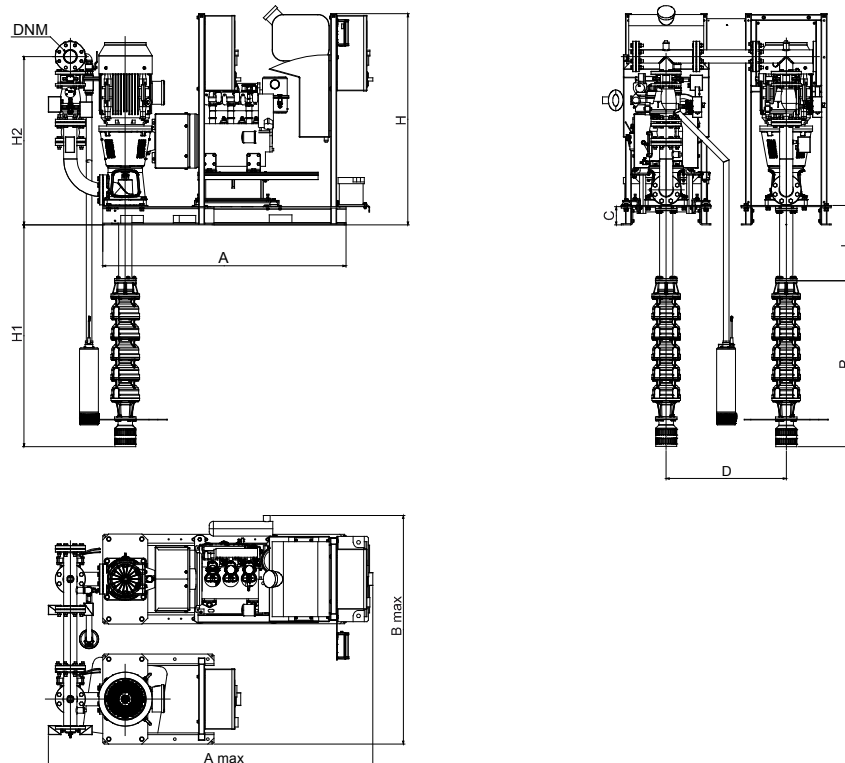


1KVT8 13N/4 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

ELECTRIC PUMP MODULE

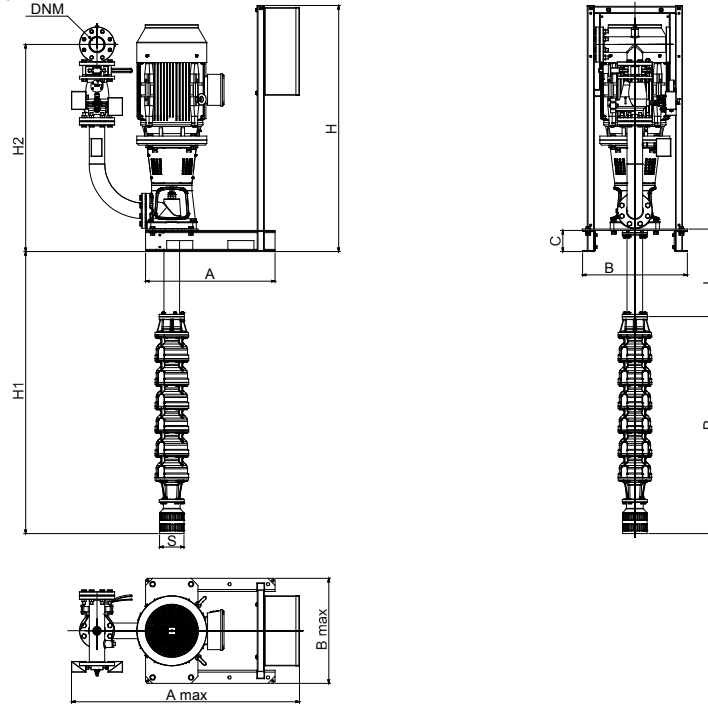

DIESEL ENGINE-DRIVEN PUMP MODULE

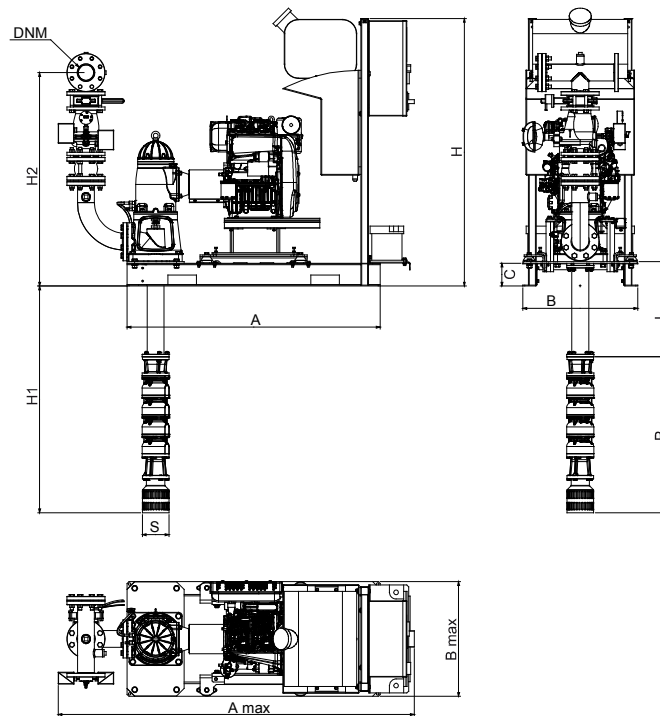


MODEL	A	A max	B	B max	C	H	H2	P	S	L	H1	A1	B1	B3	DNM
1KVT8 13N/4 - ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE	1974	2218	-	1637	140	1406	1183	968	-	2000	2848	-	-	-	DN 80
1KVT8 13N/4 30 18.5 400/50 - ELECTRIC PUMP MODULE	740	1337	599	599	120	1406	1183	968	Ø 140	2000	2848	-	-	-	DN 80
1KVT8 13N/4 19 MD - DIESEL ENGINE-DRIVEN PUMP MODULE	1974	2218	595	638	140	1406	1121	968	Ø 140	2000	2848	-	-	-	DN 80

The L and H1 values depend on the selected axis line (L).
7 different axis line lengths available on request.

1KVT8 13N/5 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0 °C to +40 °C - Ambient temperature range: from +4 °C to +40 °C

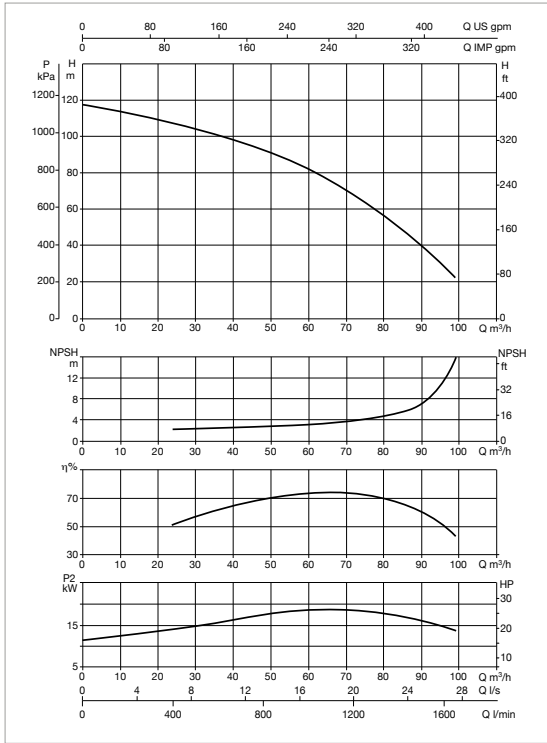

KVT EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	METER KIT
			kW	kW		
1 KVT8 13N/5 22 400/50	3 x 400 V ~	DIVER 200 T	22	1,5	38	FLOW METER DN 80

KVT EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE-DRIVEN PUMP	P2 JOCKEY PUMP	FAN SURFACE	DIESEL COLLECTION TANK
			kW	kW		
1 KVT8 13N/5 26 MD	1 x 220 - 240 V ~	DIVER 200 T	26	1,5	0,22 m²	50 l included

*Jockey pump on request.

**ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE

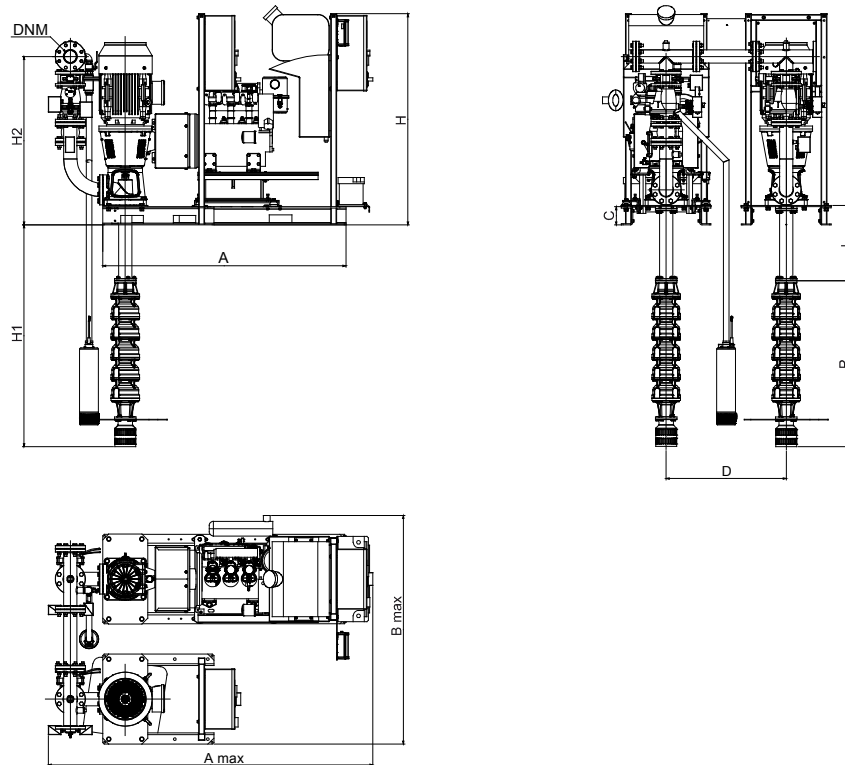


1KVT8 13N/5 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

ELECTRIC PUMP MODULE

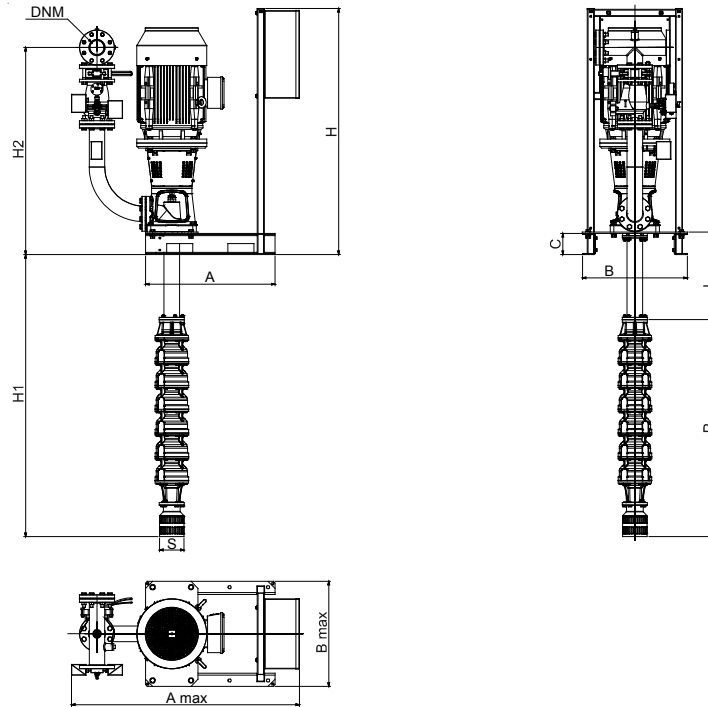

DIESEL ENGINE-DRIVEN PUMP MODULE

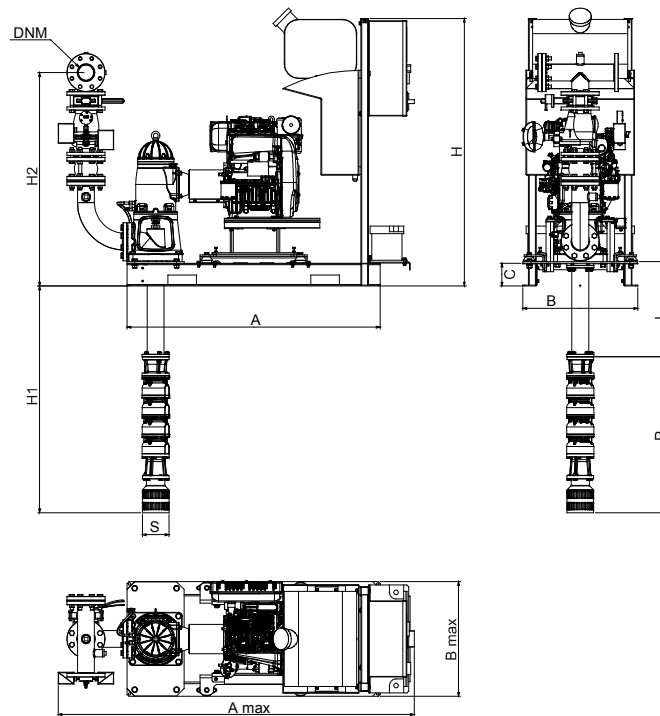


MODEL	A	A max	B	B max	C	H	H2	P	S	L	H1	A1	B1	B3	DNM
1KVT8 13N/5 - ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE	1974	2218	-	1721	140	1406	1183	1104	-	2000	2984	-	-	-	DN 80
1KVT8 13N/5 22 400/50 - ELECTRIC PUMP MODULE	740	1337	599	599	120	1406	1183	1104	Ø 140	2000	2984	-	-	-	DN 80
1KVT8 13N/5 26 MD - DIESEL ENGINE-DRIVEN PUMP MODULE	1974	2218	595	722	140	1406	1121	1104	Ø 140	2000	2984	-	-	-	DN 80

The L and H1 values depend on the selected axis line (L).
7 different axis line lengths available on request.

1KVT8 13N/6 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0 °C to +40 °C - Ambient temperature range: from +4 °C to +40 °C

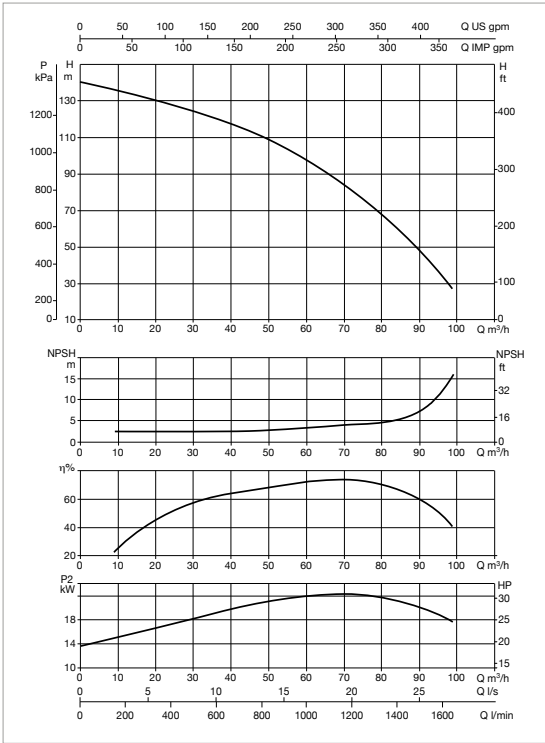

KVT EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	METER KIT
			KW	KW		
1 KVT8 13N/6 30 400/50	3 x 400 V ~	DIVER 200 T	30	1,5	52	FLOW METER DN 80

KVT EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE-DRIVEN PUMP	P2 JOCKEY PUMP	FAN SURFACE	DIESEL COLLECTION TANK
			KW	KW		
1 KVT8 13N/6 37 MD	1 x 220 - 240 V ~	DIVER 200 T	37	1,5	0,40 m²	125 l accessories

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE

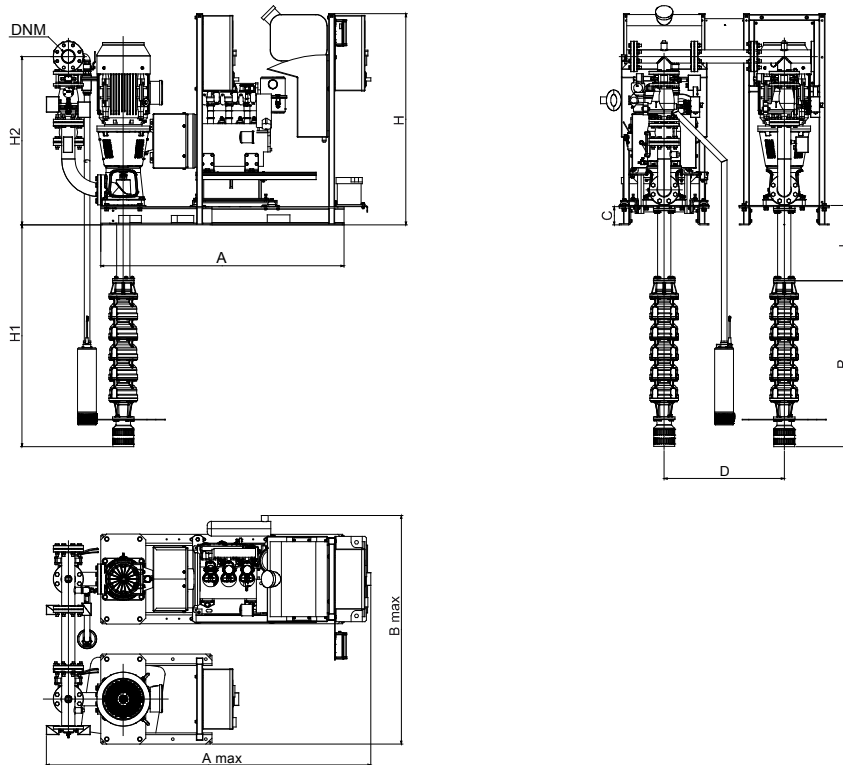


1KVT8 13N/6 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

ELECTRIC PUMP MODULE

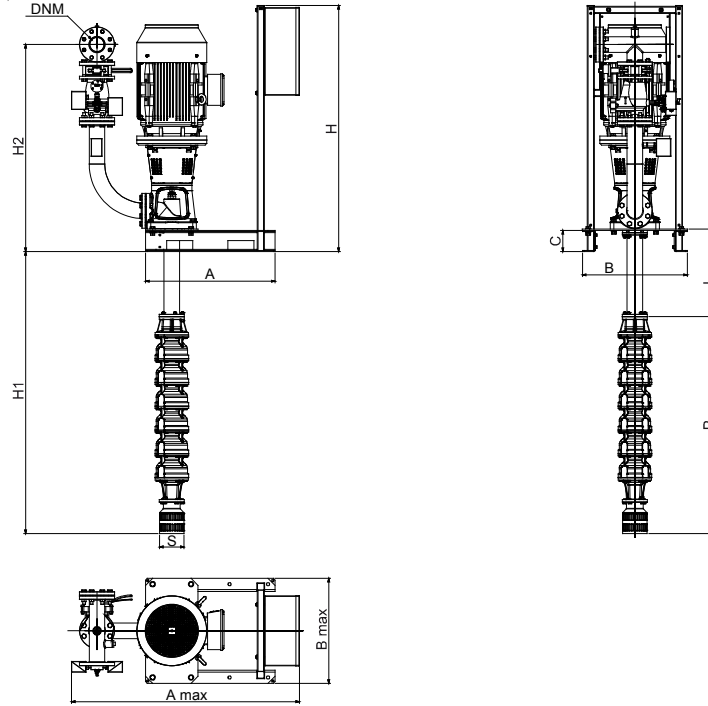

DIESEL ENGINE-DRIVEN PUMP MODULE

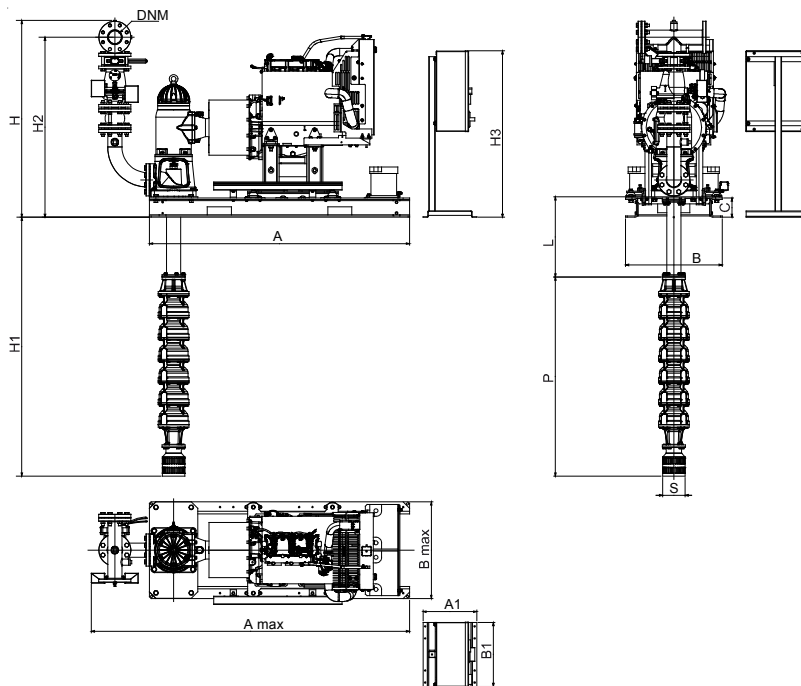


MODEL	A	A max	B	B max	C	H	H2	P	S	L	H1	A1	B1	B3	DNM
1KVT8 13N/6 - ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE	1974	2038	-	1601	140	1406	1183	1240	-	2000	3100	-	-	-	DN 80
1KVT8 13N/6 30 400/50 - ELECTRIC PUMP MODULE	740	1304	599	599	120	1406	1183	1240	∅ 140	2000	3120	-	-	-	DN 80
1KVT8 13N/6 37 MD - DIESEL ENGINE-DRIVEN PUMP MODULE	1974	2038	602	602	140	1241	1135	1240	∅ 140	2000	3100	335	400	1037	DN 80

The L and H1 values depend on the selected axis line (L).
7 different axis line lengths available on request.

1 KVT8 24N/5 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0 °C to +40 °C - Ambient temperature range: from +4 °C to +40 °C

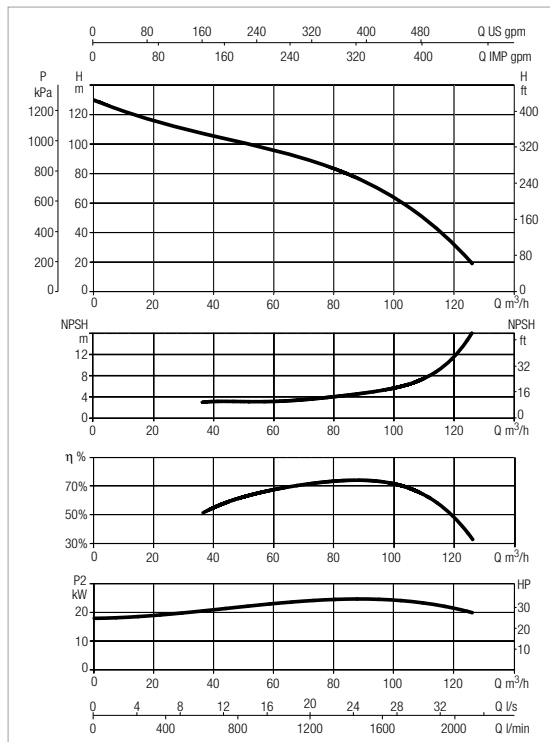

KVT EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	METER KIT
			kW	kW		
1 KVT8 24N/5 30 400/50	3 x 400 V ~	S4A25 T	30	0,75	52	FLOW METER DN 100

KVT EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE-DRIVEN PUMP	P2 JOCKEY PUMP	FAN SURFACE	DIESEL COLLECTION TANK
			kW	kW		
1 KVT8 24N/5 37 MD	1 x 220 - 240 V ~	S4A25 T	37	0,75	0,40 m²	125 l accessories

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE

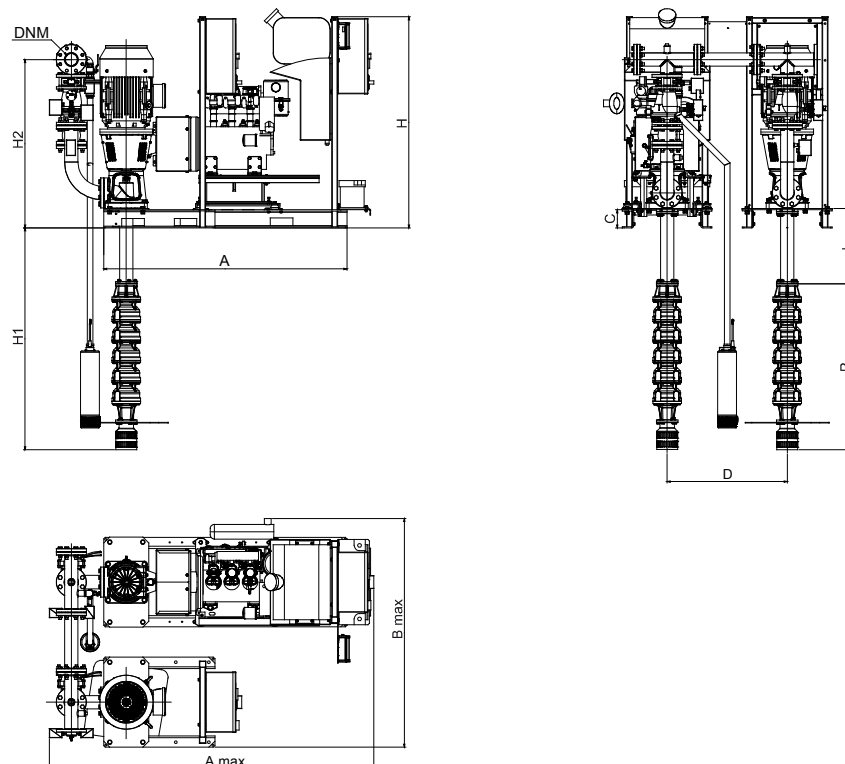


1 KVT8 24N/5 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

ELECTRIC PUMP MODULE

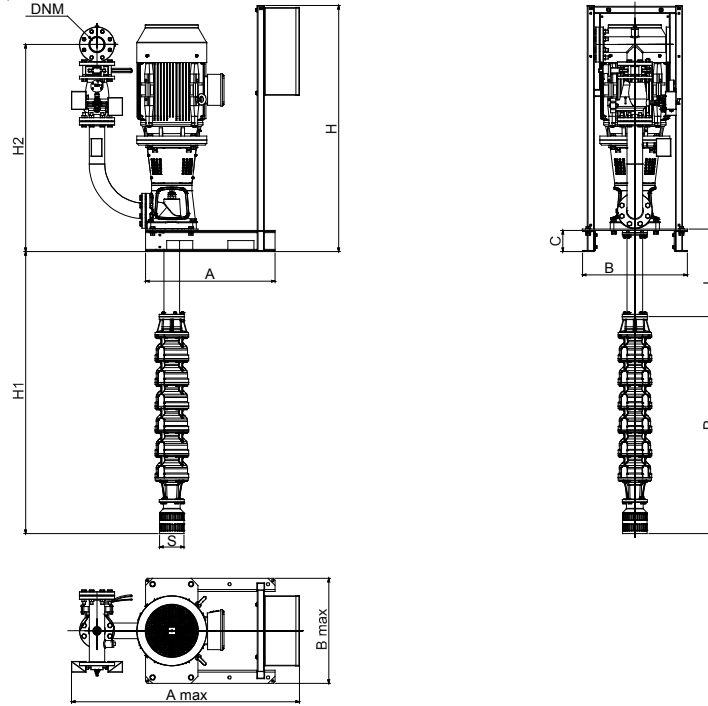

DIESEL ENGINE-DRIVEN PUMP MODULE

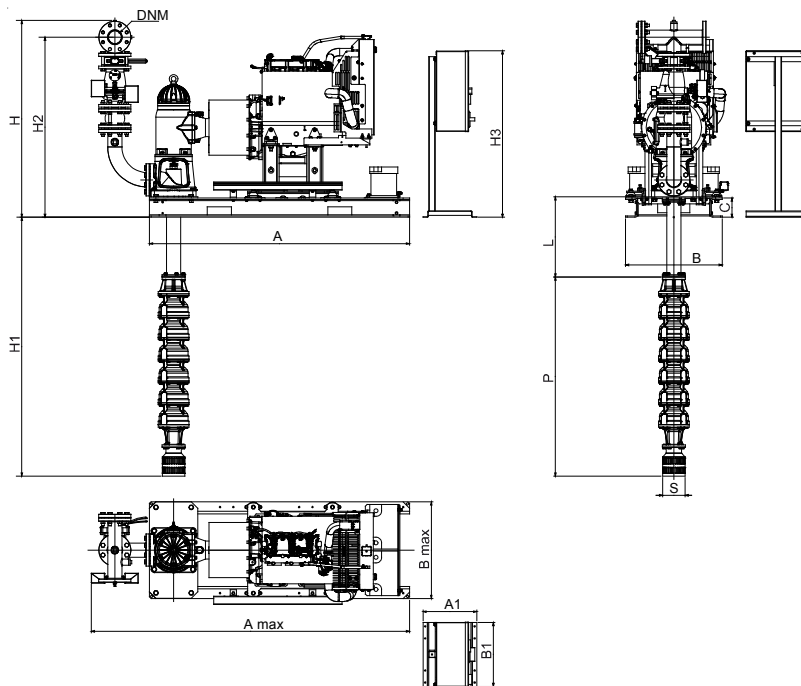


MODEL	A	A max	B	B max	C	H	H2	P	S	L	H1	A1	B1	B3	DNM
1KVT8 24N/5 - ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE	1974	2159	-	1495	140	1441	1323	1151	-	2000	3011	-	-	-	DN 100
1KVT8 24N/5 30 400/50 - ELECTRIC PUMP MODULE	1227	1584	595	595	140	1441	1323	1151	Ø 140	2000	3011	-	-	-	DN 100
1KVT8 24N/5 37 MD - DIESEL ENGINE-DRIVEN PUMP MODULE	1974	2159	595	632	140	1441	1323	1151	Ø 140	2000	3011	335	400	1037	DN 100

The L and H1 values depend on the selected axis line (L).
7 different axis line lengths available on request.

1 KVT8 35N/5 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0 °C to +40 °C - Ambient temperature range: from +4 °C to +40 °C

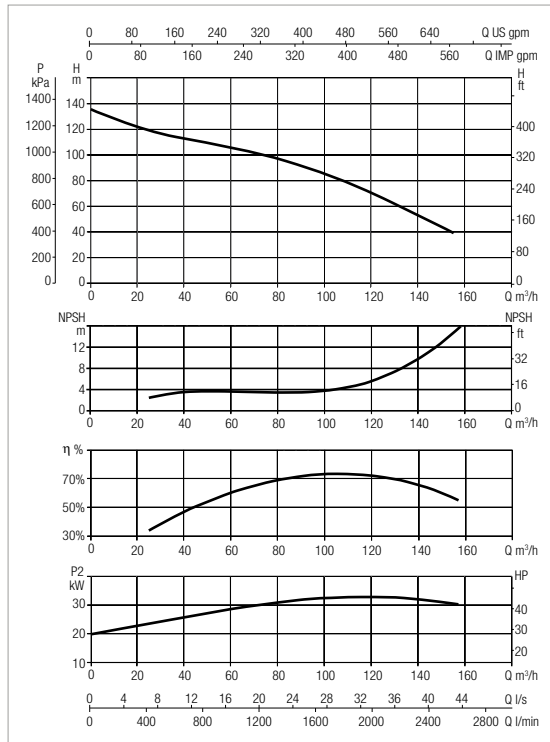

KVT EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	METER KIT
			kW	kW		
1 KVT8 35N/5 37 400/50	3 x 400 V ~	S4A25 T	37	0,75	63	FLOW METER DN 125

KVT EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE-DRIVEN PUMP	P2 JOCKEY PUMP	FAN SURFACE	DIESEL COLLECTION TANK
			kW	kW		
1 KVT8 35N/5 37 MD	1 x 220 - 240 V ~	S4A25 T	37	0,75	0,40 m²	125 l accessories

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE

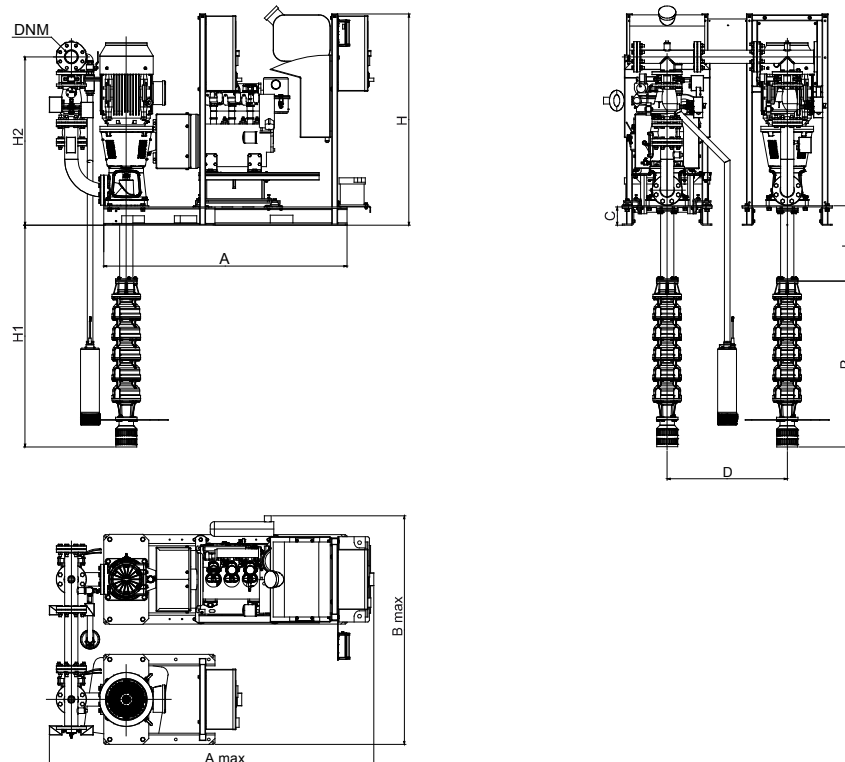


1 KVT8 35N/5 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

ELECTRIC PUMP MODULE

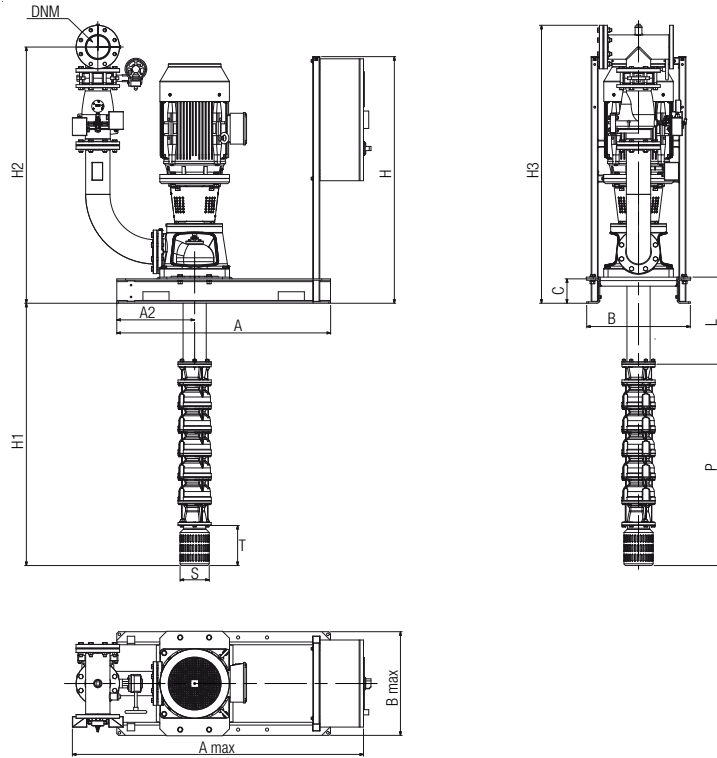

DIESEL ENGINE-DRIVEN PUMP MODULE

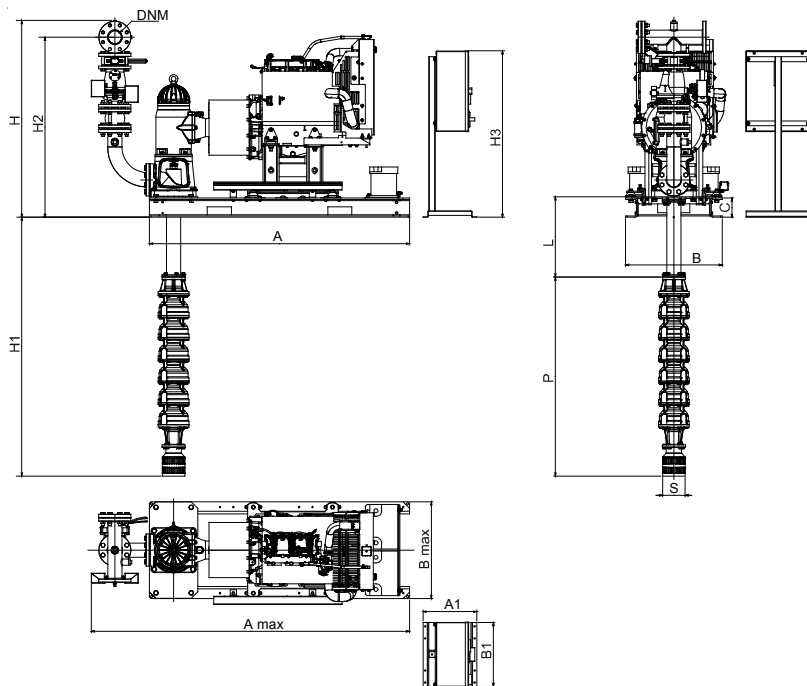


MODEL	A	A max	B	B max	C	H	H2	P	S	L	H1	A1	B1	B3	DNM
1 KVT8 35N/5 - ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE	1974	2229	-	1495	140	1602	1471	1156	-	2000	3016	-	-	-	DN 125
1 KVT8 35N/5 37 400/50 - ELECTRIC PUMP MODULE	1227	1672	595	600	140	1416	1471	1156	Ø 140	2000	3016	-	-	1596	DN 125
1 KVT8 35N/5 37 MD - DIESEL ENGINE-DRIVEN PUMP MODULE	1974	2229	595	627	140	1602	1471	1156	Ø 140	2000	3016	335	400	1037	DN 125

The L and H1 values depend on the selected axis line (L).
7 different axis line lengths available on request.

1 KVT8 45N/2 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0 °C to +40 °C - Ambient temperature range: from +4 °C to +40 °C

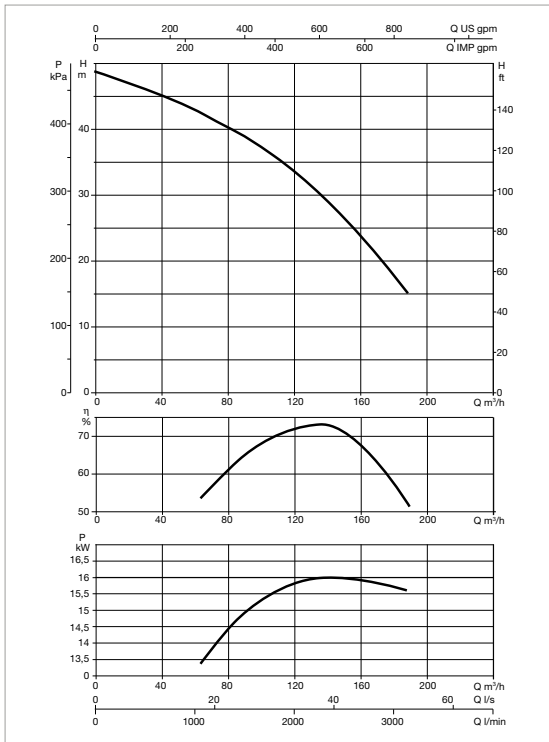

KVT EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	METER KIT
			KW	KW		
1 KVT8 45N/2 18,5 400/50	3 x 400 V ~	DIVER 200 T	18,5	1,5	32	FLOW METER DN 125

KVT EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE-DRIVEN PUMP	P2 JOCKEY PUMP	FAN SURFACE	DIESEL COLLECTION TANK
			KW	KW		
1 KVT8 45N/2 19 MD	1 x 220 - 240 V ~	DIVER 200 T	19	1,5	0,22 m²	50 l Included

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE

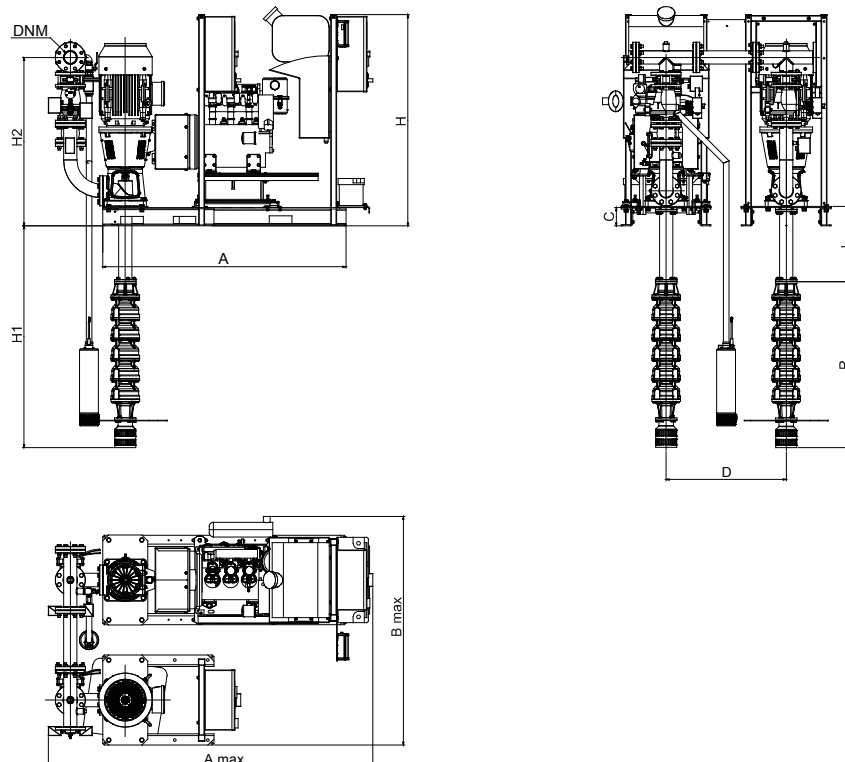


1 KVT8 45N/2 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

ELECTRIC PUMP MODULE

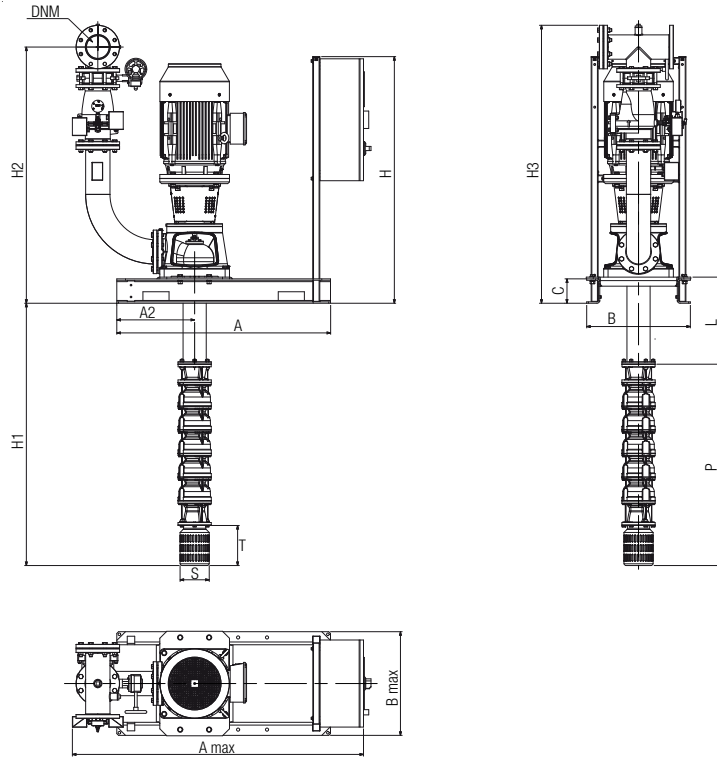

DIESEL ENGINE-DRIVEN PUMP MODULE

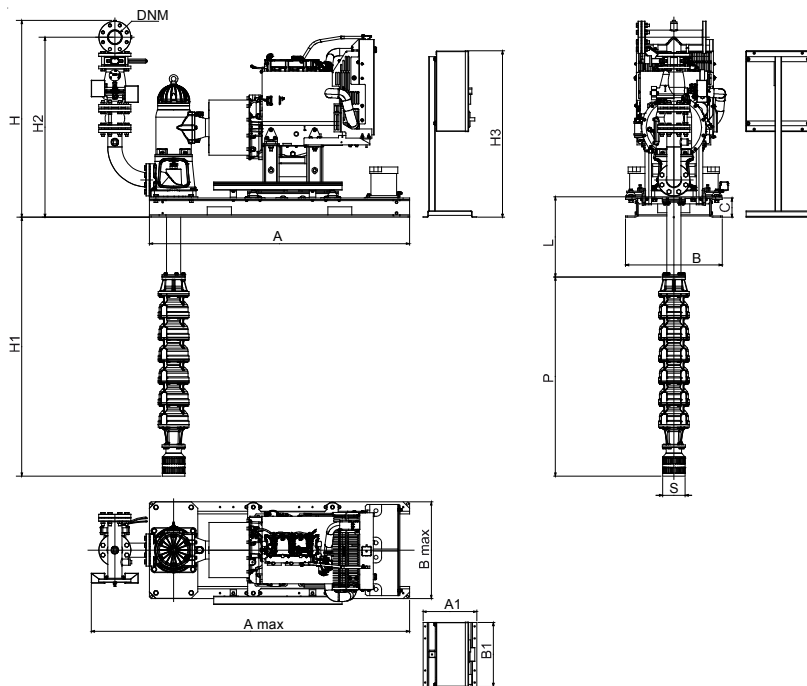


MODEL	A	A max	B	B max	C	H	H2	P	S	L	H1	A1	B1	B3	DNM
1 KVT8 45N/2 - ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE	1974	2408	-	1495	140	1416	1471	749	-	2000	2609	-	-	-	DN 125
1 KVT8 45N/2 18,5 400/50 - ELECTRIC PUMP MODULE	1227	1653	595	600	140	1416	1471	749	Ø 140	2000	2609	-	-	1596	DN 125
1 KVT8 45N/2 19 MD - DIESEL ENGINE-DRIVEN PUMP MODULE	1974	2408	595	638	140	1596	1471	749	Ø 140	2000	2609	-	-	-	DN 125

The L and H1 values depend on the selected axis line (L).
7 different axis line lengths available on request.

1 KVT8 45N/4 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0 °C to +40 °C - Ambient temperature range: from +4 °C to +40 °C

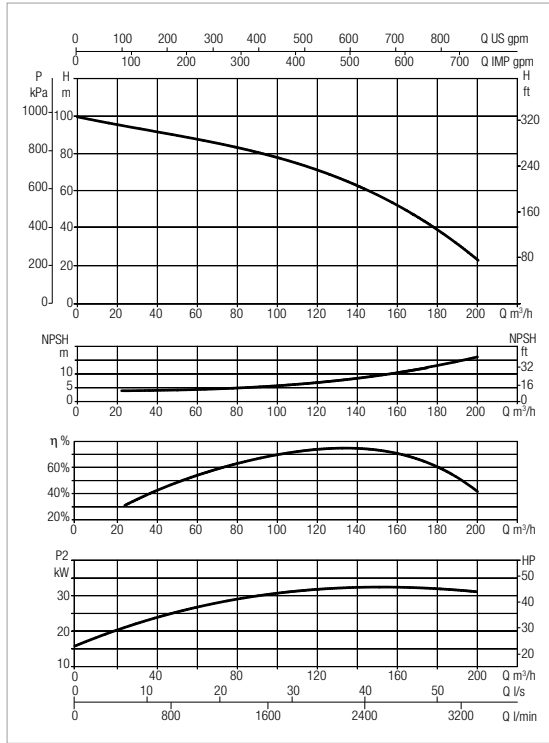

KVT EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	METER KIT
			kW	kW		
1 KVT8 45N/4 37 400/50	3 x 400 V ~	DIVER 200 T	37	1,5	63	FLOW METER DN 125

KVT EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE-DRIVEN PUMP	P2 JOCKEY PUMP	FAN SURFACE	DIESEL COLLECTION TANK
			kW	kW		
1 KVT8 45N/4 37 MD	1 x 220 - 240 V ~	DIVER 200 T	37	1,5	0,40 m²	125 l accessories

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE

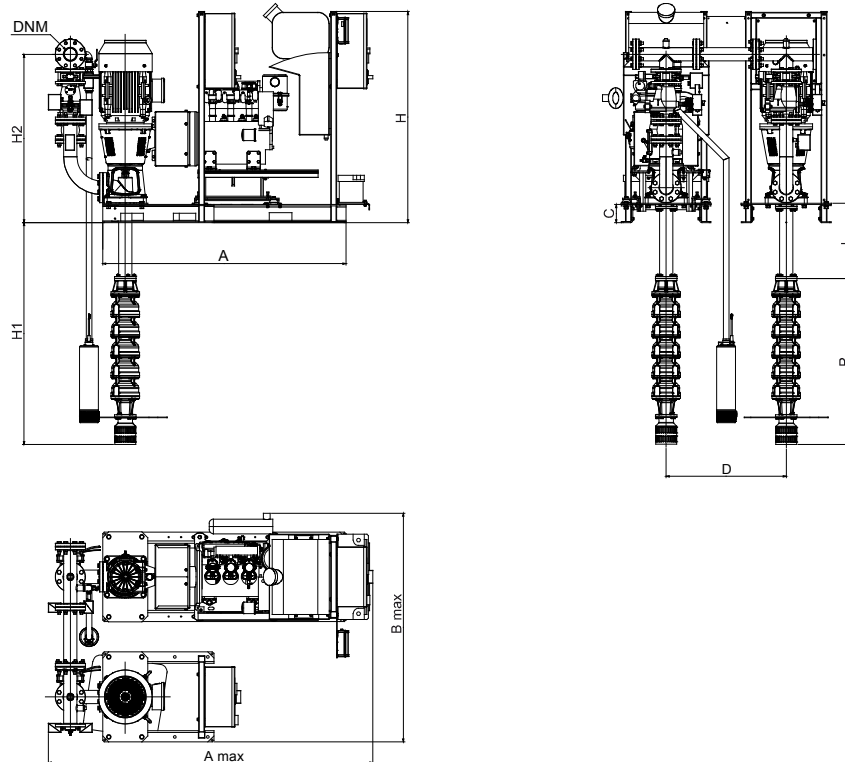


1 KVT8 45N/4 - UNI EN 12845 FIRE FIGHTING PUMPS SETS

ELECTRIC PUMP MODULE

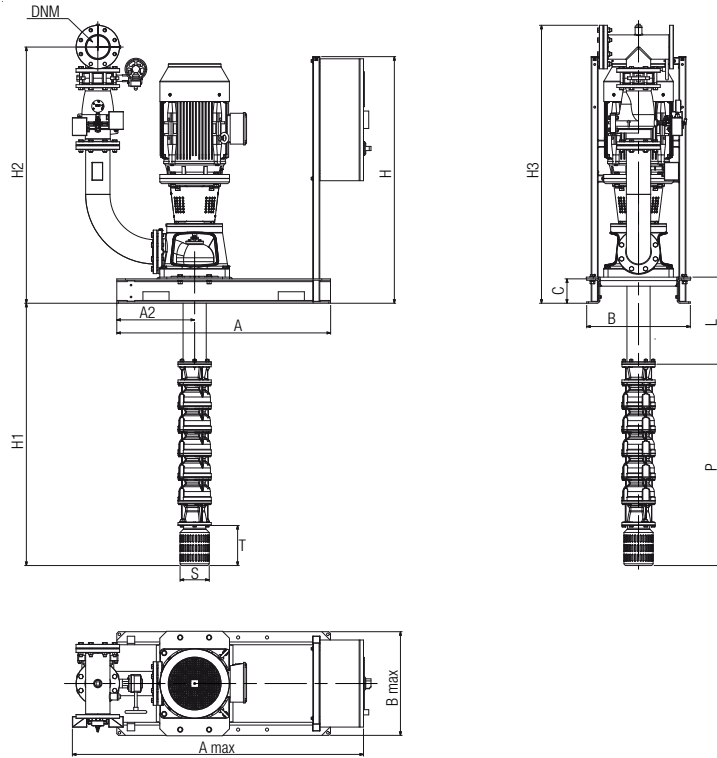

DIESEL ENGINE-DRIVEN PUMP MODULE

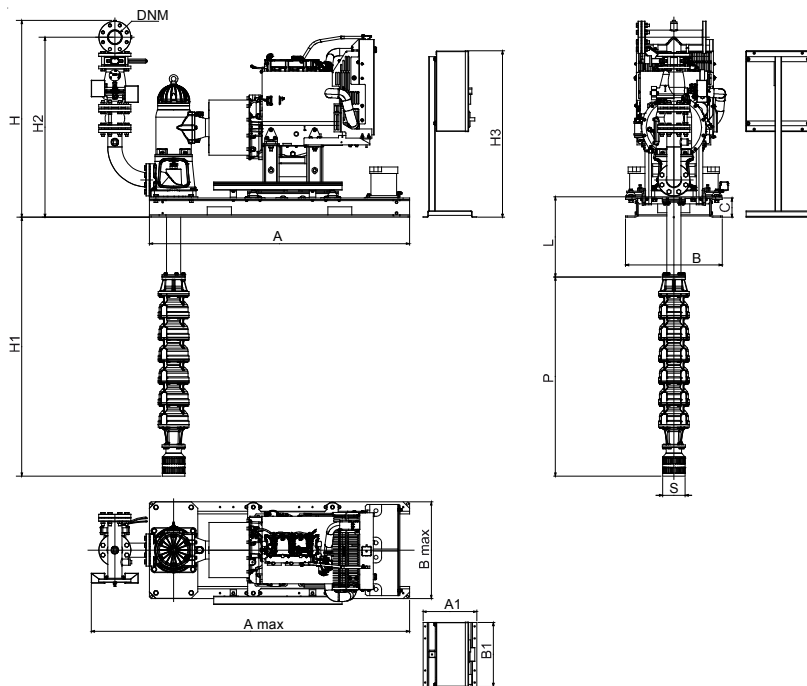


MODEL	A	A max	B	B max	C	H	H2	P	S	L	H1	A1	B1	B3	DNM
1 KVT8 45N/4 - ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE	1974	2229	-	1495	140	1602	1471	1020	-	2000	2880	-	-	-	DN 125
1 KVT8 45N/4 37 400/50 - ELECTRIC PUMP MODULE	1227	1672	595	600	140	1416	1471	1020	Ø 140	2000	2880	-	-	1596	DN 125
1 KVT8 45N/4 37 MD - DIESEL ENGINE-DRIVEN PUMP MODULE	1974	2229	595	627	140	1602	1471	1020	Ø 140	2000	2880	335	400	1037	DN 125

The L and H1 values depend on the selected axis line (L).
7 different axis line lengths available on request.

1KVT10 15N/2A - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0 °C to +40 °C - Ambient temperature range: from +4 °C to +40 °C

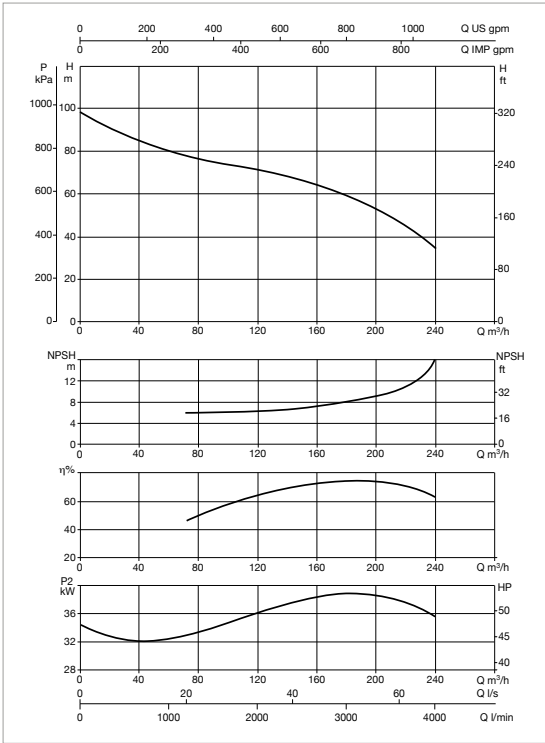

KVT EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	METER KIT
			KW	KW		
1 KVT10 15N/2A 45 400/50	3 x 400 V ~	DIVER 200 T	45	1,5	76	FLOW METER DN 125

KVT EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE-DRIVEN PUMP	P2 JOCKEY PUMP	FAN SURFACE	DIESEL COLLECTION TANK
			KW	KW		
1 KVT10 15N/2A 53 MD	1 x 220 - 240 V ~	DIVER 200 T	53	1,5	0,40 m²	125 l accessories

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE

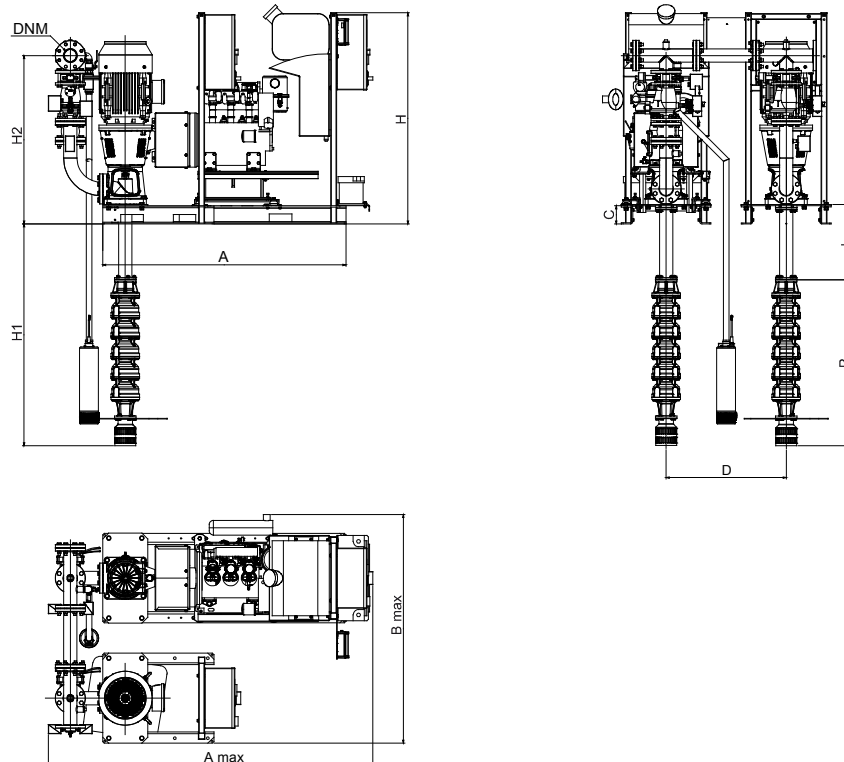


1KVT10 15N/2A - UNI EN 12845 FIRE FIGHTING PUMPS SETS

ELECTRIC PUMP MODULE

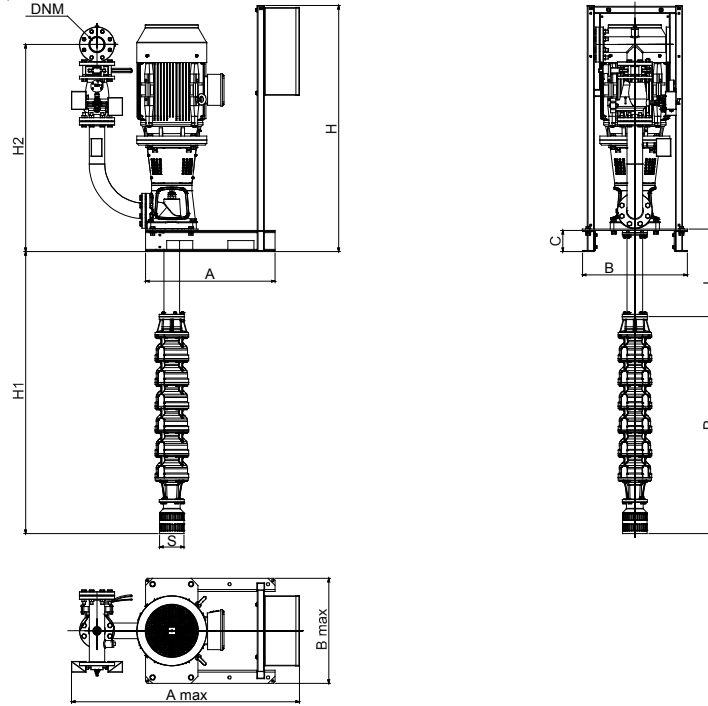

DIESEL ENGINE-DRIVEN PUMP MODULE

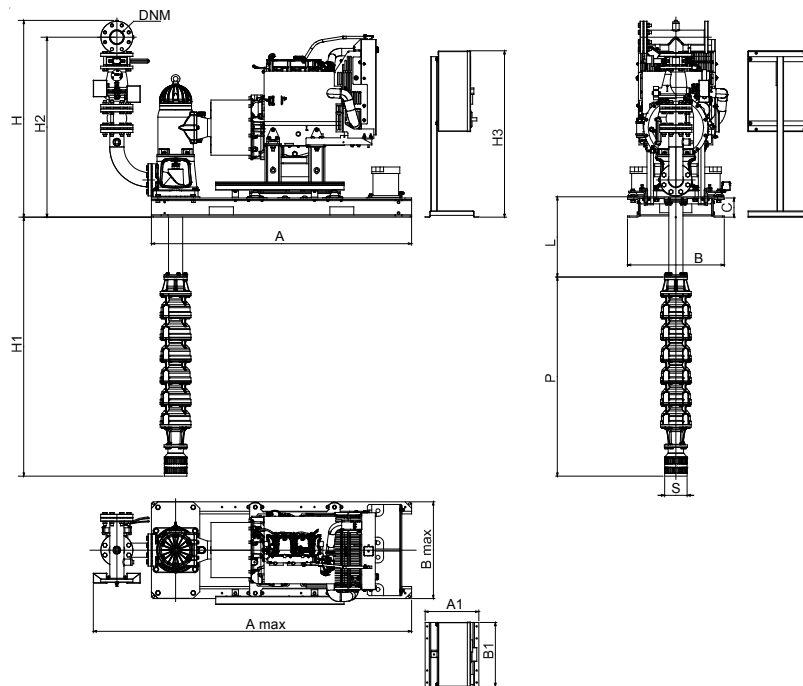


MODEL	A	A max	B	B max	C	H	H2	P	S	L	H1	A1	B1	B3	DNM
1KVT10 15N/2A - ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE	1974	2229	-	1864	140	1600	1534	1038	-	2000	2898	-	-	-	DN 125
1KVT10 15N/2A 45 400/50 - ELECTRIC PUMP MODULE	1184	1914	730	730	140	1600	1534	1038	Ø 214	2000	2898	-	-	-	DN 125
1KVT10 15N/2A 53 400/50 - DIESEL ENGINE-DRIVEN PUMP MODULE	1974	2229	602	634	140	1596	1465	1038	Ø 214	2000	2898	335	400	1037	DN 125

The L and H1 values depend on the selected axis line (L).
7 different axis line lengths available on request.

1KVT10 15N/3CD - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0 °C to +40 °C - Ambient temperature range: from +4 °C to +40 °C

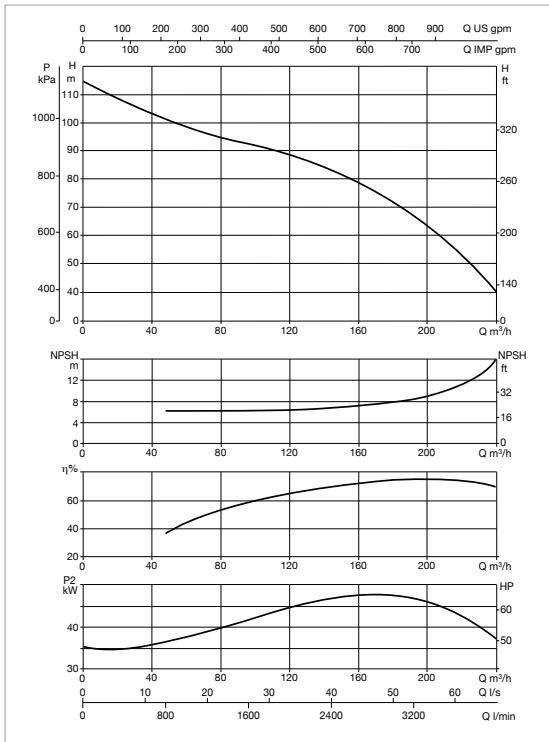

KVT EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	METER KIT
			KW	KW		
1 KVT10 15N/3CD 55 400/50	3 x 400 V ~	S4A25 T	55	0,75	95	FLOW METER DN 125

KVT EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE-DRIVEN PUMP	P2 JOCKEY PUMP	FAN SURFACE	DIESEL COLLECTION TANK
			KW	KW		
1 KVT10 15N/3CD 73,5 MD	1 x 220 - 240 V ~	S4A25 T	73,5	0,75	0,40 m²	125 l accessories

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE

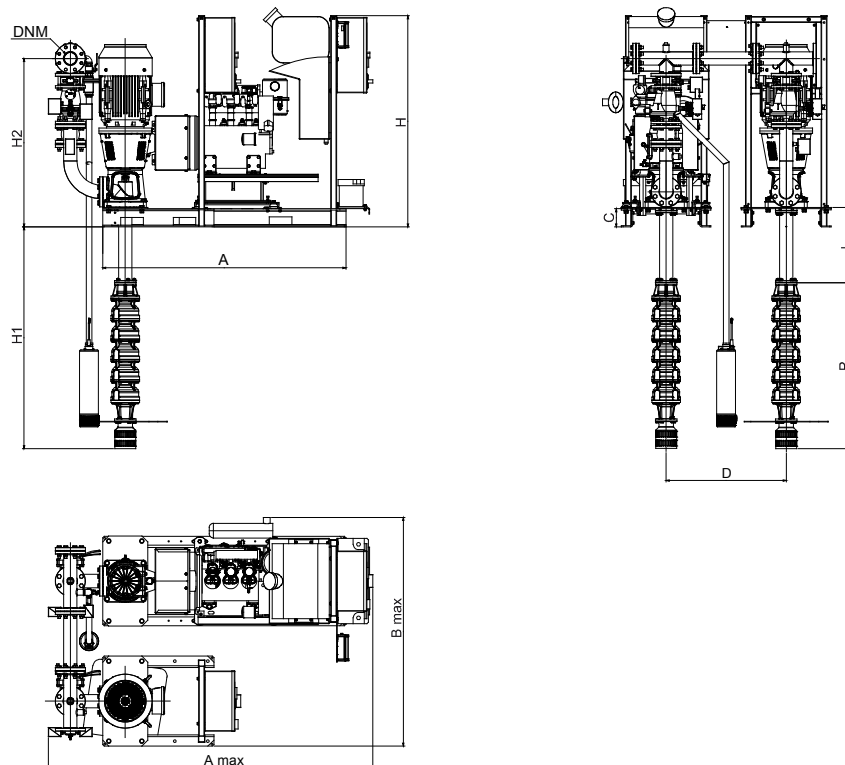


1KVT10 15N/3CD - UNI EN 12845 FIRE FIGHTING PUMPS SETS

ELECTRIC PUMP MODULE

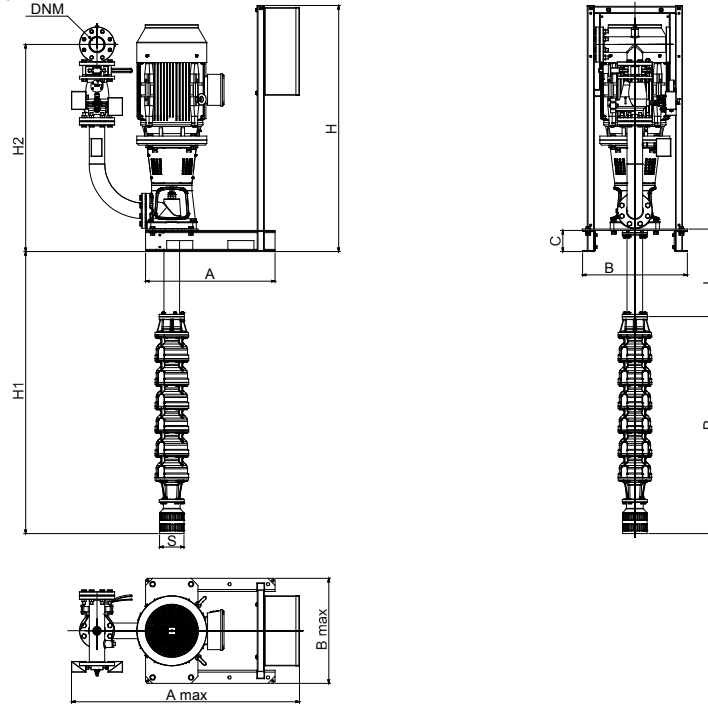

DIESEL ENGINE-DRIVEN PUMP MODULE

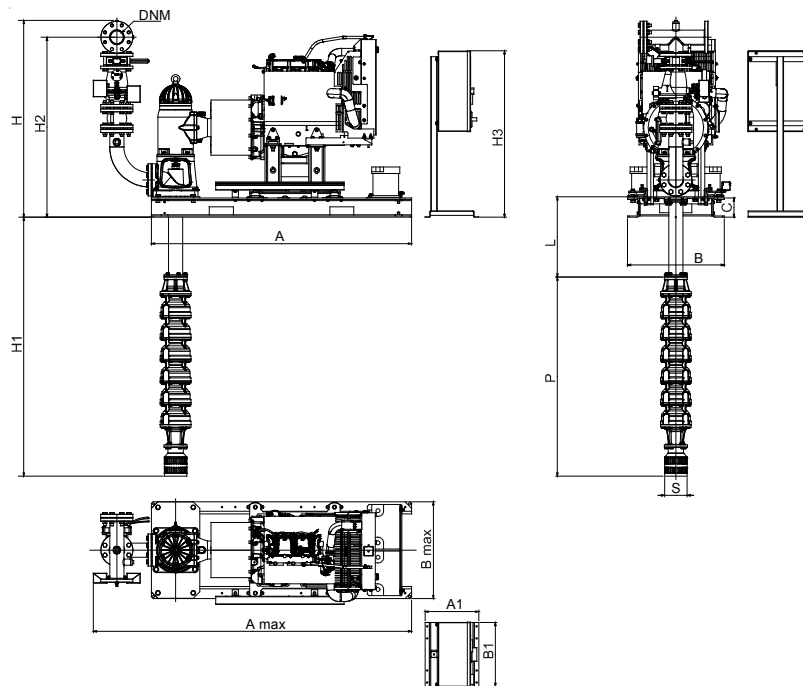


MODEL	A	A max	B	B max	C	H	H2	P	S	L	H1	A1	B1	B3	DNM
1KVT10 15N/3CD - ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE	1974	2186	-	1987	140	1600	1534	1218	-	2000	3078	-	-	-	DN 125
1KVT10 15N/3CD 55 400/50 - ELECTRIC PUMP MODULE	1140	1871	730	730	140	1600	1534	1218	∅ 214	2000	3078	-	-	-	DN 125
1KVT10 15N/3CD 73,5 400/50 - DIESEL ENGINE-DRIVEN PUMP MODULE	1974	2186	725	757	140	1596	1465	1218	∅ 214	2000	3078	335	400	1037	DN 125

The L and H1 values depend on the selected axis line (L).
7 different axis line lengths available on request.

1KVT10 26N/3A - UNI EN 12845 FIRE FIGHTING PUMPS SETS

Pumped liquid temperature range: from 0 °C to +40 °C - Ambient temperature range: from +4 °C to +40 °C

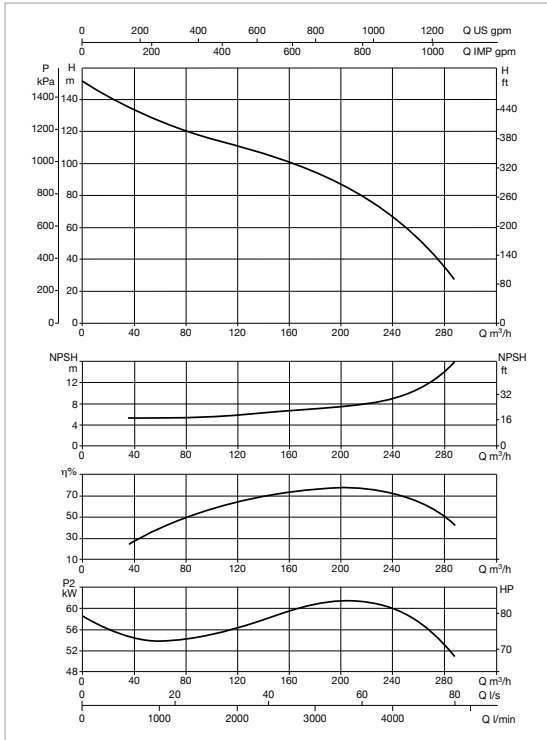

KVT EN 12845 ELECTRIC PUMP

MODEL	POWER INPUT	JOCKEY PUMP*	P2 MAIN PUMP	P2 JOCKEY PUMP	In A	METER KIT
			kW	kW		
1 KVT10 26N/3A 75 400/50	3 x 400 V ~	S4A25 T	75	0,75	124	FLOW METER DN 150

KVT EN 12845 DIESEL ENGINE-DRIVEN PUMP


MODEL	BATTERY CHARGER POWER INPUT	JOCKEY PUMP*	** P2 DIESEL ENGINE-DRIVEN PUMP	P2 JOCKEY PUMP	FAN SURFACE	DIESEL COLLECTION TANK
			kW	kW		
1 KVT10 26N/3A 73,5 MD	1 x 220 - 240 V ~	S4A25 T	73,5	0,75	0,40 m²	125 l accessories

* Jockey pump on request.

** ISO 3046 continuous power The motor is capable of delivering 10 % more of the power requested by the pump.


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE

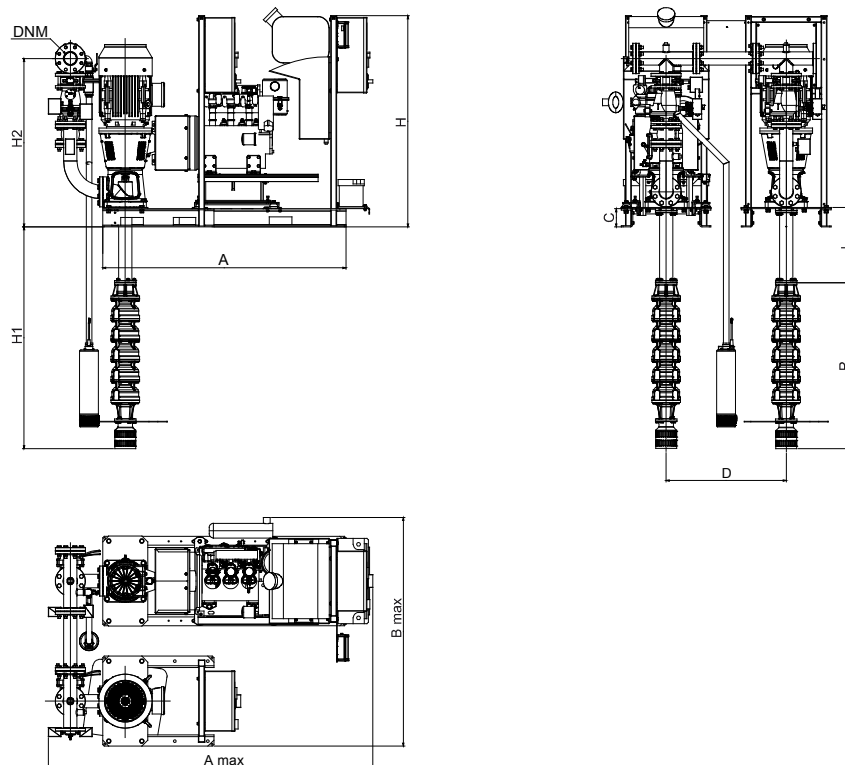


1KVT10 26N/3A - UNI EN 12845 FIRE FIGHTING PUMPS SETS

ELECTRIC PUMP MODULE

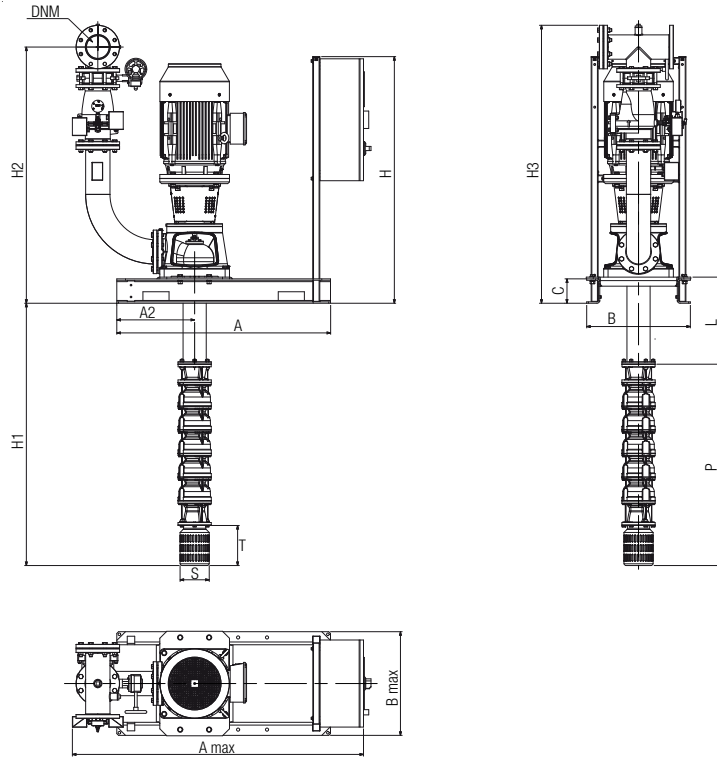

DIESEL ENGINE-DRIVEN PUMP MODULE

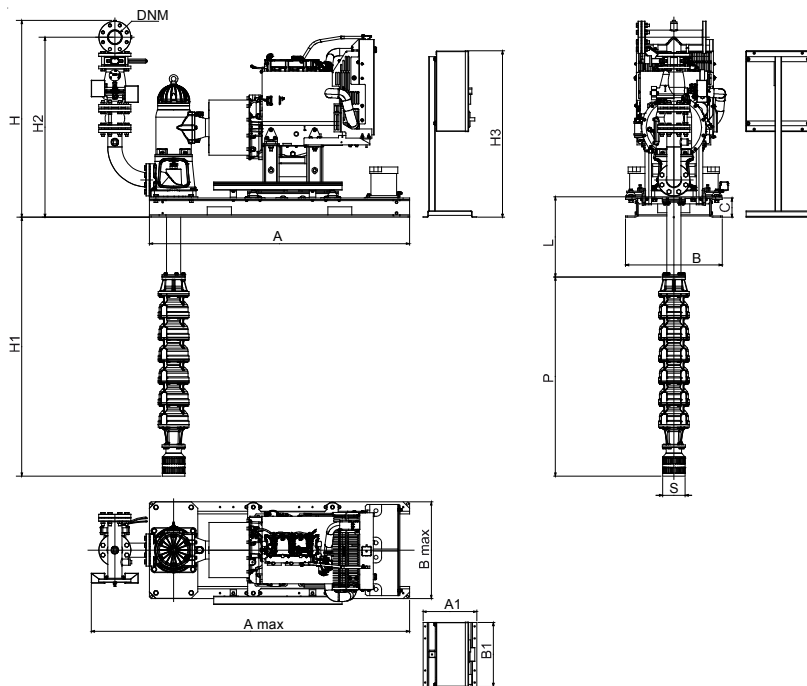

MODEL	A	A max	B	B max	C	H	H2	P	S	L	H1	A1	B1	B3	DNM
1KVT10 26N/3A - ELECTRIC PUMP + DIESEL ENGINE-DRIVEN PUMP + JOCKEY PUMP MODULE	1974	2276	-	1957	140	1762	1702	1197	-	2000	3057	-	-	-	DN 150
1KVT10 26N/3A 75 400/50 - ELECTRIC PUMP MODULE	1140	2036	730	730	140	1600	1623	1197	Ø 214	2000	3057	-	-	1768	DN 150
1KVT10 26N/3A 73,5 400/50 - DIESEL ENGINE-DRIVEN PUMP MODULE	1974	2276	725	757	140	1762	1617	1197	Ø 214	2000	3057	355	400	1037	DN 150

The L and H1 values depend on the selected axis line (L).
7 different axis line lengths available on request.

S4 - SS6 - SS7 - SS8

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH 4", 6", 7", 8" SUBMERSIBLE PUMPS



TECHNICAL DATA

Operating range: from 4 to 160 m³/h

Pumped liquid: clean, free of solids and abrasives, non-viscous, non-aggressive, non-crystallised and chemically neutral, with properties similar to water

Pumped liquid temperature range: from -15 to 70 °C

Maximum ambient temperature: + 25 °C

Maximum operating pressure: 16 bar (1600kPa) PN16

Special executions on request:

execution with joined cable available on request

The control panels of the sets with submerged pumps are already fitted on base for quicker installation

The main and pilot pumps are provided as standard with a 15-metre power cable

All the 6" and 8" electric pumps (SS6 – SS7 and SS8) are entirely in AISI 304 stainless steel

GENERAL DATA

NOTES ON UNI EN 12845

UNI EN 12845, the Italian version of European Standard EN 12845, sets the design, installation and maintenance criteria for sprinkler systems. It replaces the earlier Italian standards UNI 9489 and UNI 9490. An automatic sprinkler system is designed to detect the presence of fire and extinguish it during the initial stages, or to keep flames under control until they can be extinguished fully using other means. The classic sprinkler system is composed of: a water source, a fire-fighting pump unit, a series of control valves, and a sprinkler circuit. In its basic execution, it consists of: one or more 4", 6", or 8" submerged electric pumps, plus the 4" compensation pump (jockey), if required. All 4" - 6" - 7" - 8" electric pumps, including main and jockey pumps, are equipped with 15 meter power input cable.

COMPOSITION OF THE PUMP SETS

The pumps of UNI EN 12845 sets will have the same characteristics; in addition:

- if TWO pumps are installed, each pump must deliver the total system load (100 %),
- if THREE pumps are installed, each pump must deliver 50 % of the load required by the design.

NOTE:

In case of single water supply, there are no limitations on the number of electric pumps that can be installed. DAB provides "modular" type sets, so that all the versions contemplated by the UNI EN 12845 standard - OPERATION OF UNI EN 12845 FIRE-FIGHTING PUMP SETS - can be completed.

In normal conditions, (zero water request), the system is under static pressure. The first time there is a water request, the compensation pump activates (if present), reinstating the system pressure. In case of significant water request (or if no compensation pump is installed, or the sprinklers activate), the pressure drops until the two pressure switches connected in series activate the main pump. If the pressure continues to drop, further pumps activate in the same way.

Pressure switch calibration and operation example.

	Maximum pump pressure x 0,8	
Two-pump sets	Pump 1 Max pressure x 0,8	Pump 2 Max pressure x 0,6

E.g. Max pump pressure 10 bar - pump 1 starts at 8 bar, pump 2 starts at 6 bar

Once activated, the main pump continues to operate until it is manually stopped using the STOP pushbutton on the electric control panel.

No protections for stops due to lack of water are permitted. In case of hydrant systems, refer to UNI 10779 - July 07. In addition to prescribing feed pumps in compliance with UNI EN 12845, UNI 10779 allows automatic stopping of the pumps 20 minutes after the closing of the hydrants, in case of non-permanently supervised operation. DAB pump sets are suitable for sprinkler systems with manual stop, and for hydrant systems with automatic stop.

S4 - SS6 - SS7 - SS8

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH 4", 6", 7", 8" SUBMERSIBLE PUMPS

PRESSURE COMPENSATION PUMP - "JOCKEY"

The compensation pump (jockey) is a pump that intervenes when the collection of a small amount of water is required. This avoids pointless starts of the main pumps in case of small system leaks. DAB fire-fighting sets are available with and without jockey pump.

The compensation pump must be installed at the delivery manifold, and includes:

- ball valve on the suction,
- check ball valve on the delivery,
- control pressure switch,
- 20 litre expansion vessel.
- control and protection panels

CONSTRUCTION FEATURES

In the standard versions, the configurations are with multistage centrifugal submerged electric pumps for 4", 6", or 8" wells.

CONSTRUCTION FEATURES OF THE 4" PUMPS

Multistage centrifugal type with radial or semi-axial impellers. Pump and motor directly coupled with rigid coupling. Technopolymer impellers with stainless steel wearing parts, fitted on floating clearance rings made of synthetic low abrasion material, and technopolymer diffusers that impart significant wear resistance to the pump. Pump liner, shaft and coupling, strainer and cable sheath in stainless steel. Base support and upper head in microcast AISI 304 stainless steel; steel check valve incorporated in the head (to be removed for horizontal installation).

CONSTRUCTION FEATURES OF THE 6" - 7" - 8" PUMPS

Mixed flow pumps with diffusers, impellers, brackets, suction case and discharge case completely made of stainless steel AISI 304 in order to provide maximum strength, durability, wear and tear resistance.

The impellers are balanced and locked to the shaft with a specially shaped collet and nut coupling, in order to guarantee ease-to-assembly feature and avoid vibration sensitive malfunctions and noise increase during rotation.

Rubber bearings that drive the shaft are water lubricated and have sand channels to make enable the sand particles leave the pump with the pumped liquid (maximum permissible sand content 50 gr/m3).

Built-in non returned valve provided in order to minimize local friction losses.


Stainless steel strainer provided in order to prevent particles over a certain size from entering the pump.

HYDRAULIC SECTION

Pre-assembled manifold with:

flanged connection for each pump, pressure gauge, pump running notification pressure switch, check valve, butterfly shut-off valve, galvanised steel delivery manifold with pressure gauges and two pump start pressure switches, pressure switch test circuit, expansion vessel (in case of jockey pump).

NOTE: electric and hydraulic connections not supplied by DAB Pumps

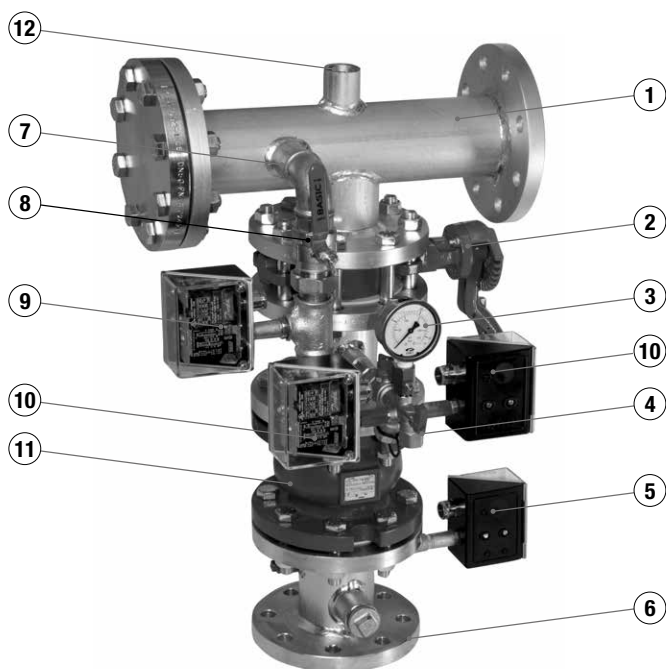

REF.	DESCRIPTION	S4"	SS6"	SS7" SS8"
1	Delivery manifold	DN 50	DN 80	DN 100
2	Butterfly shut-off valve	DN50 PN16	DN80 PN16	DN100 PN16
3	Radial pressure gauge	0-16 bar D=63		
4	Pressure switch manual test valve	-		
5	Running pump pressure switch	KPI36 2-12bar ¼"M		
6	DNA adaptor	DN 50	DN 80	DN 100
7	Jockey pump connection manifold	1"		
8	Jockey pump shut-off valve (version with jockey pump only)	1"		
9	Jockey pump pressure switch (version with jockey pump only)	KPI36 2-12bar ¼"M		
10	Main pump start pressure switches	KPI36 2-12bar ¼"M (x2)		
11	Non-return valve	DN50 PN16	DN80 PN16	DN100 PN16
12	Expansion vessel manifold (version with jockey pump only)	1"		

S4 - SS6 - SS7 - SS8

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH 4", 6", 7", 8" SUBMERSIBLE PUMPS


COOLING LINERS FOR 4" SUBMERSIBLE PUMP

For horizontal installation and/or inside tanks, a cooling liner must be used to safeguard the motor.


Kit of cooling liners of different lengths, used to ensure perfect cooling of the 4" motor in case of installation inside tanks or containers, or in any location where a minimum cooling flow on the motor cannot be guaranteed.

The length of the pipe must be selected based on the type of motor and its power, as indicated in the following table.

POWER INPUT 50 Hz	MOTOR POWER		MOTOR TYPE		
	HP	kW	4GG - 4GX	40L	4TW
SINGLE-PHASE	0,5	0,37	L400 PIPE KIT	L400 PIPE KIT	L525 PIPE KIT
	0,75	0,55			
	1	0,75			
	1,5	1,1	L525 PIPE KIT	L525 PIPE KIT	L885 PIPE KIT
	2	1,5			
	3	2,2	L885 PIPE KIT	L885 PIPE KIT	
	5	3,7			

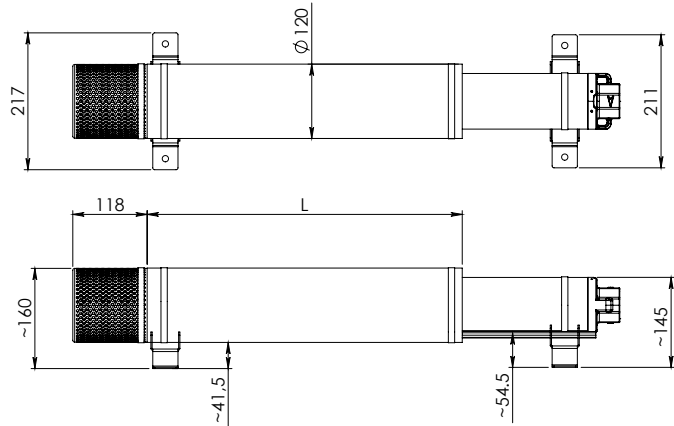

THREE-PHASE	0,5	0,37	L400 PIPE KIT	L400 PIPE KIT
	0,75	0,55		
	1	0,75		
	1,5	1,1	L525 PIPE KIT	L525 PIPE KIT
	2	1,5		
	3	2,2	L885 PIPE KIT	L885 PIPE KIT
	4	3		
	5,5	4		
	7,5	5,5		
	10	7,5		

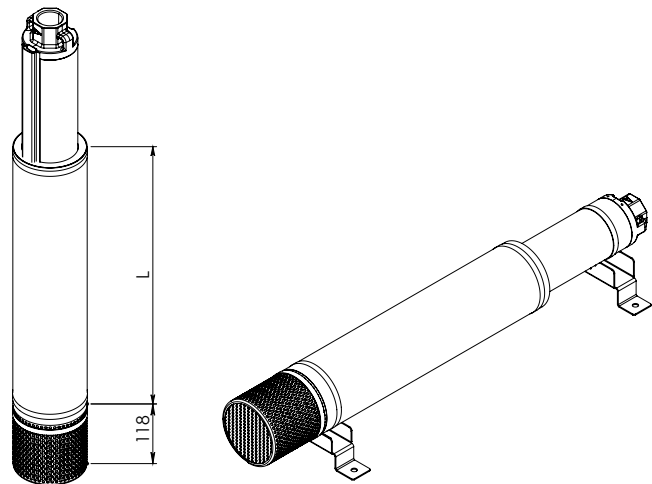

S4 - SS6 - SS7 - SS8

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH 4", 6", 7", 8" SUBMERSIBLE PUMPS

COOLING LINERS FOR 6" SUBMERGED PUMP




For horizontal installation and/or inside tanks, a cooling liner must be used to safeguard the motor.

Kit of cooling liners of different lengths, used to ensure perfect cooling of the 6" motor in case of installation inside tanks or containers, or in any location where a minimum cooling flow on the motor cannot be guaranteed.

The length of the pipe must be selected based on the type of motor and its power, as indicated in the following table.

SUITABLE FOR USE ON S6, SR6 E SM6 ELECTRIC PUMPS COUPLED WITH 6" MOTOR.

POWER INPUT 50 Hz	MOTOR POWER		MOTOR TYPE	
	HP	kW	6GF-6GX	TR6
THREE-PHASE	5,5	4	725 PIPE KIT	960 PIPE KIT
	7,5	5,5		
	10	7,5		
	12,5	9,3		
	15	11	960 PIPE KIT	1220 PIPE KIT
	17,5	13		
	20	15		
	25	18,5		
	30	22	1220 PIPE KIT	1490 PIPE KIT
	35	26		
	40	30		
	50	37		

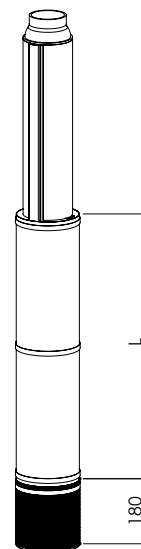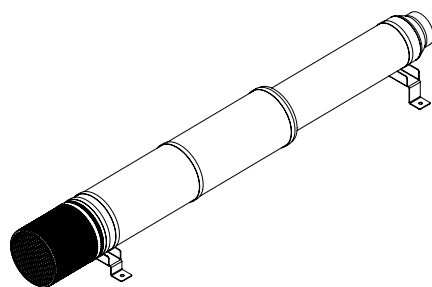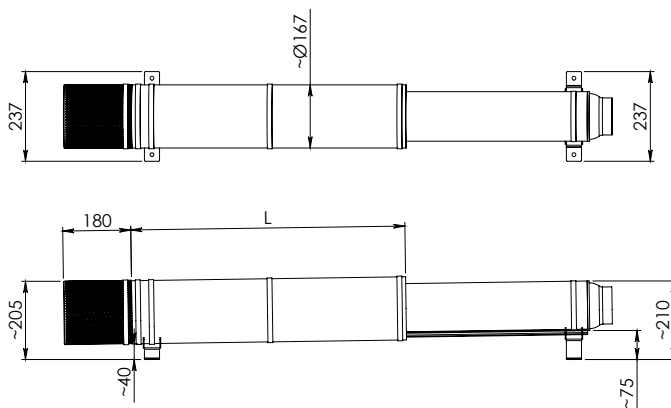

in order to determine the cooling flow speed v [m/s] along the motor liner, the following formula can be used:

$$v = \frac{Q}{\pi \cdot \left(\frac{D^2}{4} - \frac{d^2}{4} \right)}$$

On the other hand, in order to determine the correct diameter of the cooling liner, to ensure that the minimum required cooling flow condition is met at a certain pump flow level, the following formula can be used:

$$D = \sqrt{4 \cdot \left(\frac{Q}{v \cdot \pi} + \frac{d^2}{4} \right)}$$

Q [m³/s] = flow at the point of operation of the electric pump.
 D [m] = well diameter.
 d [m] = motor diameter.
 v [m/s] = cooling flow speed.

ELECTRIC PUMP CONTROL PANEL

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH 4", 6", 7", 8" SUBMERSIBLE PUMPS



TECHNICAL DATA

Nominal power input voltage: 400 V +/- 5%

Phases: 3

Frequency: 50-60 Hz

Number of pumps that can be connected: 1

Maximum nominal power of use:
from 3 to 110 kW (depending on model)

Maximum nominal current of use: from 10 Amp to 250 Amp

Ambient temperature operation limits: from +4 °C to +40 °C

Relative humidity (without condensation):

50% at 40 °C MAX (90% a 20 °C)

Max. altitude: 3000 m (a.s.l.)

Protection class: IP55

Control panel construction:

According to EN60204, EN 60439-1, and UNI EN 12845/10779

COMPONENTS

The control and protection panel includes the following components

INTERIOR OF CABINET

Connector for the powering of a GSM Modem (230 V, protected by fuse).

Motor protection fuses (aM type); current surge relay-motor protectors are not permitted by the standard.

Auxiliary circuit protection fuses (Gg type).

Direct pump starters (up to 7,5 kW).

Star/triangle starters (11 kW and over).

24 V auxiliary circuit transformers.

Alarm relay with terminal box for remote status control (as required by the UNI EN 12845 standard).

System start-up input connection terminal box.

ON FRONT PANEL

Electric pump control unit with:

Multifunction instrument with display (voltmeter, ammeter, cosfi metre, wattmeter, alarms and status).

Start and stop pushbuttons.

Status and alarm notification lamps.

Alarm/notification lamp test pushbutton.

0 - 1 selector (0 = automatic disabled; 1 = automatic on), key removable only for position one (AUTOMATIC ON).

REMOTELY CONTROLLED ALARMS:

Voltage present.

Phase sequence.

Pump start request from the pressure switches.

Pump start request from priming tank.

Pump in operation.

Start failed.

The above alarms can be remotely controlled in the following ways:

With relay wiring to the alarm monitoring control panel.

With RS-485 wiring to the alarm monitoring control panel.


With GSM Modem inside the cabinet alarm monitoring, for forwarding status and/or alarm signals (optional).

ELECTRIC PUMP CONTROL PANEL

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH 4", 6", 7", 8" SUBMERSIBLE PUMPS

ELECTRIC PUMP CONTROL UNIT

The A1 electronic control unit supplied with the control panel offers the following features: automatic start from the pressure switches or the priming float switch, manual start, automatic monitoring of pump set faults and incorrect or unavailable power input voltage.

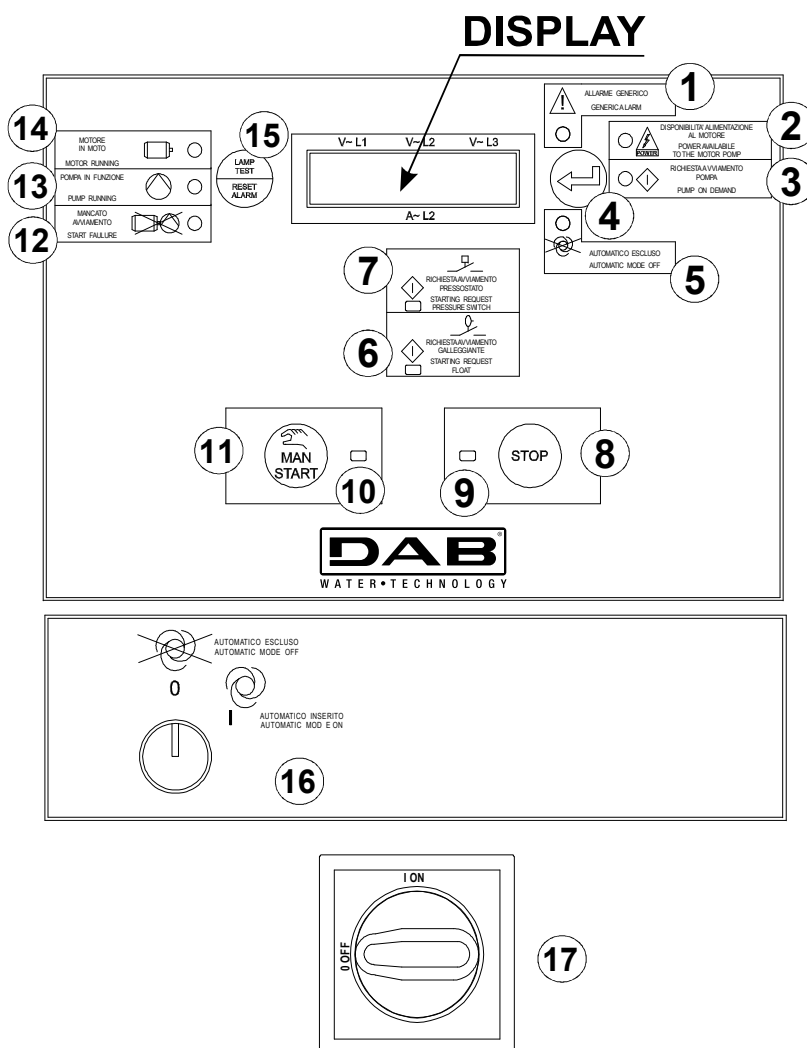

ALIMENTAZIONE DELLA POMPA SPRINKLER
NON SPEGNERE IN CASO DI INCENDIO

! SPRINKLER PUMP MOTOR SUPPLY !
NOT TO BE SWITCHED OF IN THE EVENT OF FIRE


REF.	FUNCTION
1	LAMP - Generic alarm
2	LAMP - Power input to the motor detected
3	LAMP - Pump START request
4	Press to display the instruments
5	LAMP - Automatic start disabled
6	LAMP - START request from the priming tank float switch
7	LAMP - START request (call) from the pressure switches
8	MANUAL STOP pushbutton
9	LAMP - MANUAL STOP with STOP pushbutton notification

REF.	FUNCTION
10	LAMP - MANUAL START with MAN START pushbutton notification
11	MANUAL START pushbutton
12	LAMP - Start failed
13	LAMP - ELECTRIC PUMP RUNNING with motor running; detected by the electric pump running pressure switch
14	LAMP - MOTOR RUNNING; controlled by the ammeter detection
15	Reset lamp test pushbutton
16	Automatic mode disabling selector
17	Power input disconnection switch

S4 - SS6 - SS7 - SS8

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH 4", 6", 7", 8" SUBMERSIBLE PUMPS

CONNECTION OF PRESSURE SWITCHES AND PUMP MOTOR TO THE CONTROL PANEL

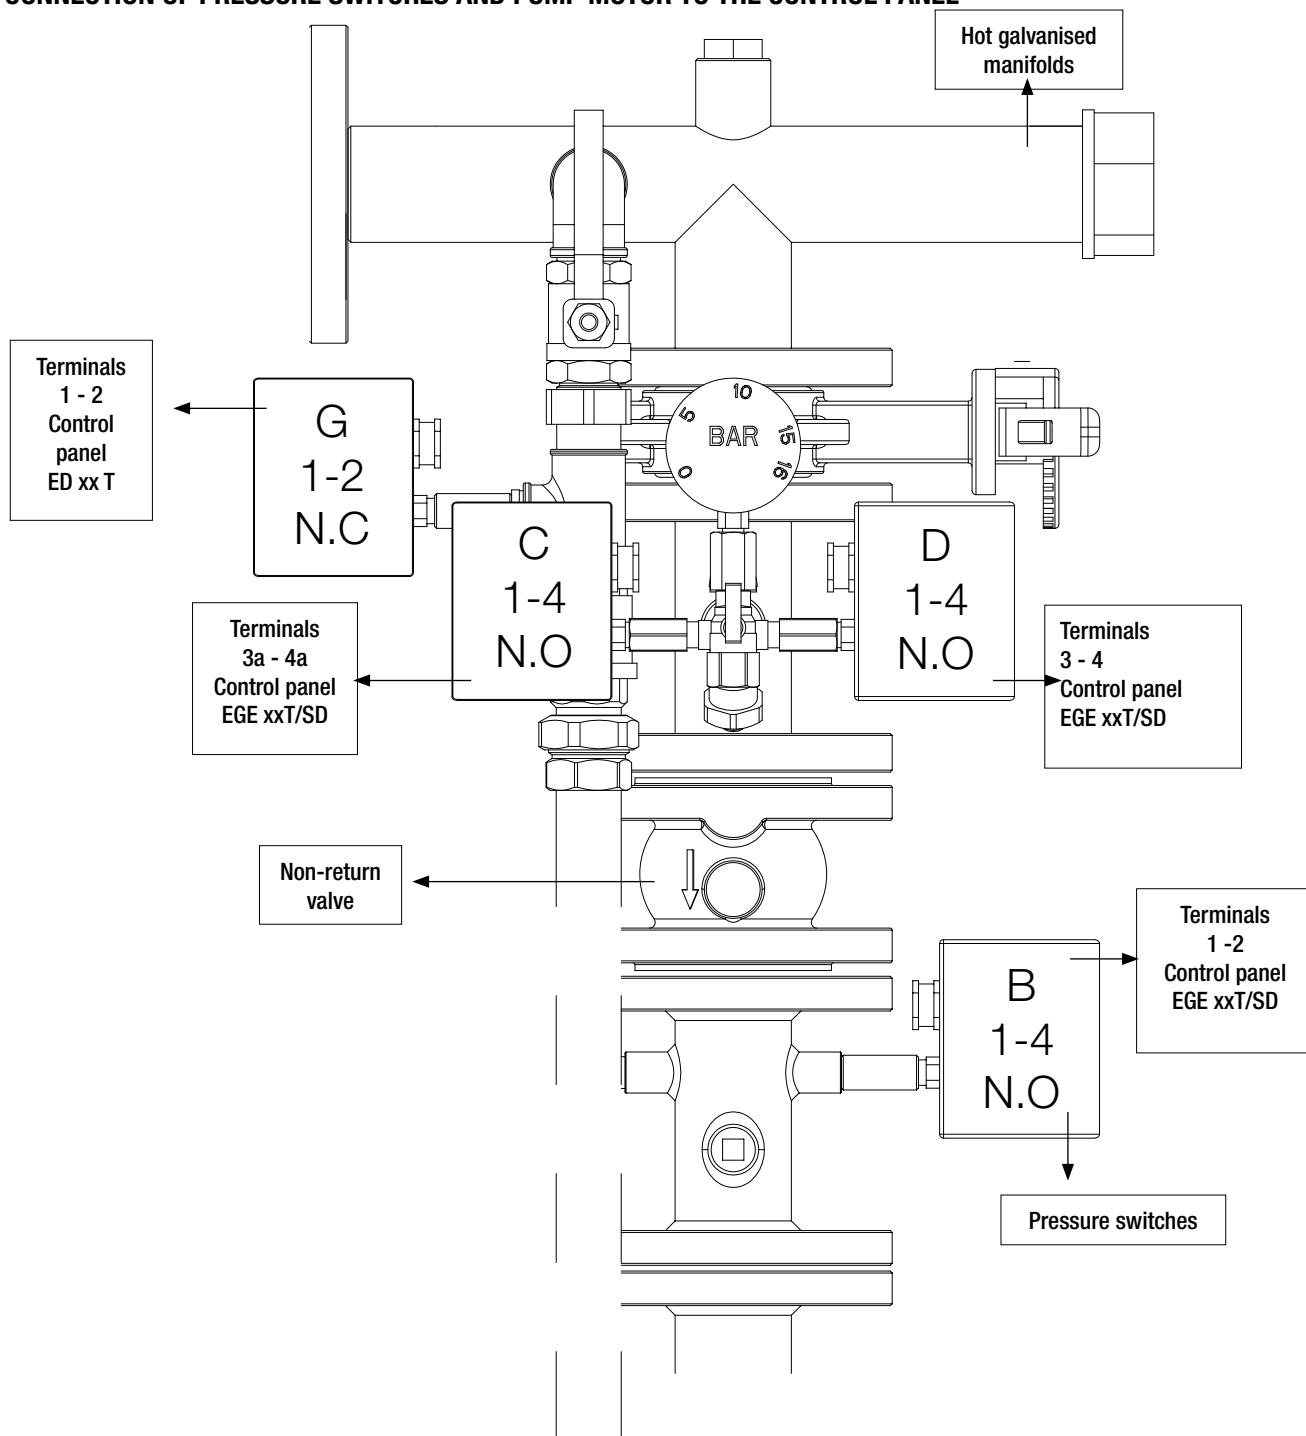

CABLE CONNECTION SEQUENCE FOR SUBMERGED PUMPS WITH START:

DIRECT (DOL)		
MOTOR POWER UP TO 7,5 KW	EGEXX T CONTROL PANEL TERMINAL BOX	SUBMERGED ELECTRIC PUMP CABLE COLOUR
	U1	BLACK
	V1	BLUE or GREY
	W1	BROWN



STAR/TRIANGLE		
MOTOR POWER OVER TO 7,5 KW	EGEXX T SD CONTROL PANEL TERMINAL BOX	SUBMERGED ELECTRIC PUMP CABLE COLOUR
	U1	BLACK
	V1	BLUE or GREY
	W1	BROWN
	U2	BROWN
	V2	BLACK
	W2	BLUE or GREY

S4 - SS6 - SS7 - SS8

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL OR DIESEL MOTOR WITH 4", 6", 7", 8" SUBMERSIBLE PUMPS


EXAMPLES OF CONFIGURATION OF A TWO-PUMP SET WITH JOCKEY PUMP AND FLOW RATE METER

Although not strictly necessary, for installation inside tanks or similar, we still recommend the use of cooling liners.

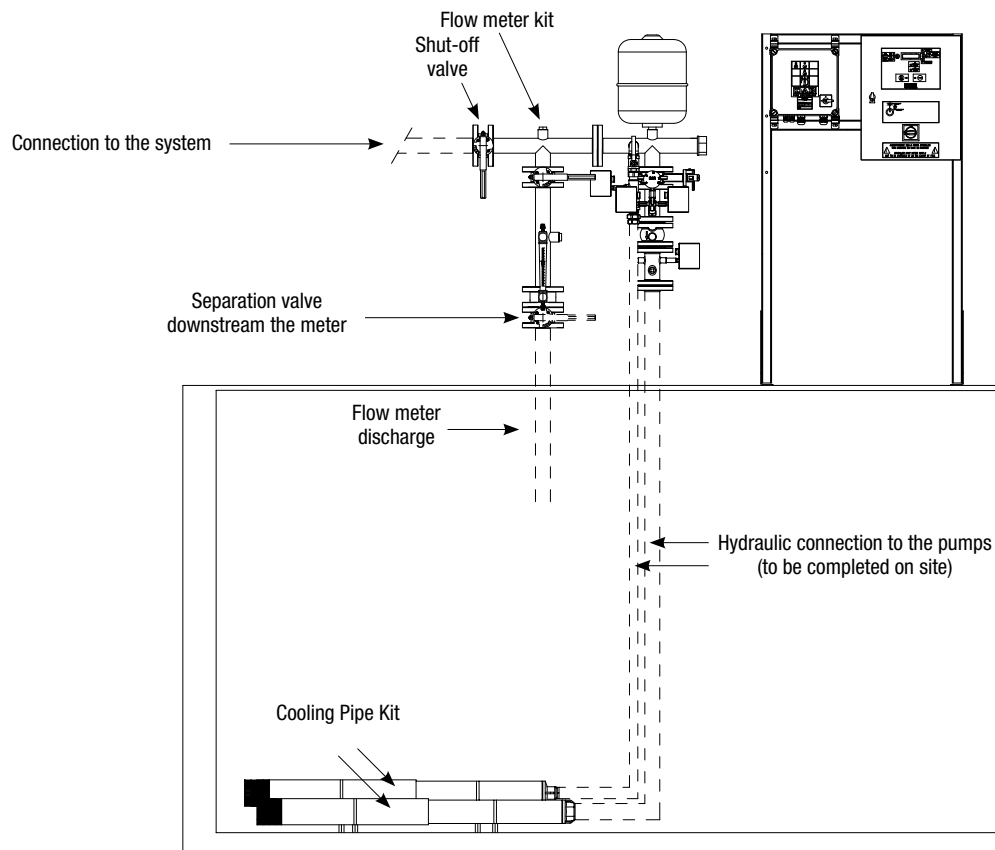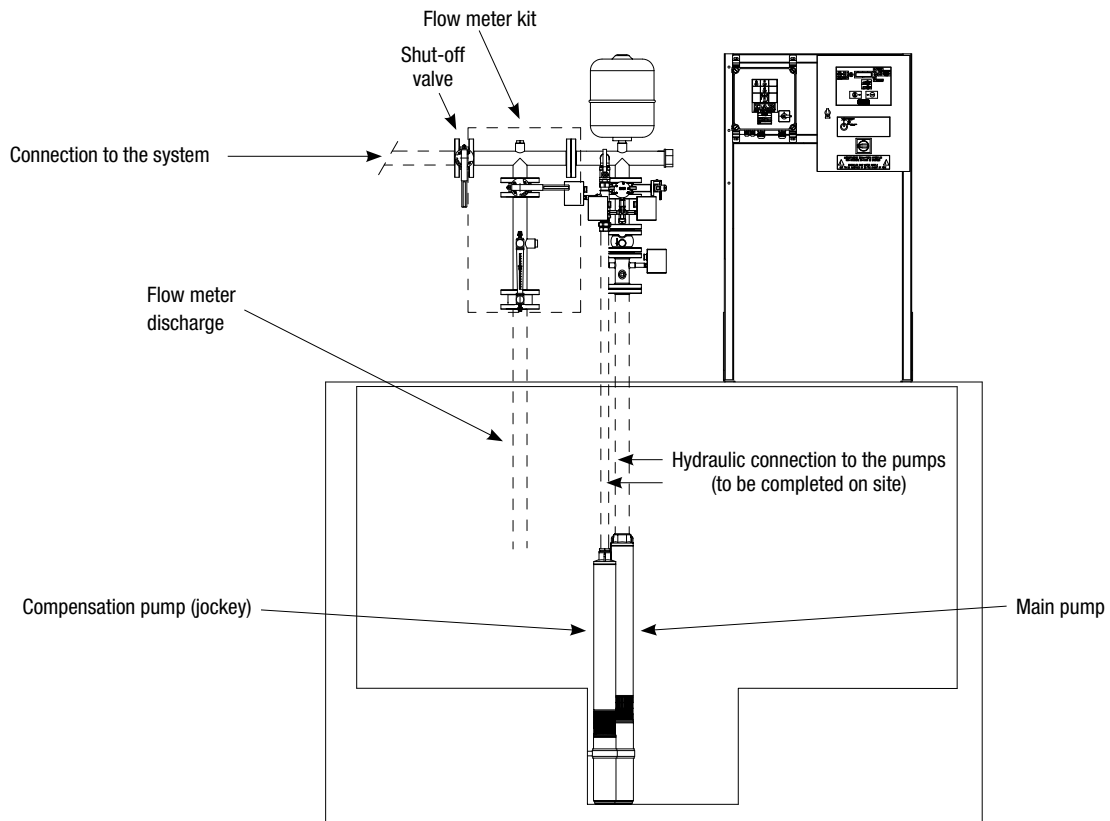

S4 SETS - UNI EN 12845 FIRE-FIGHTING SETS

Pumped liquid temperature range: from 0°C to +40°C - Maximum ambient temperature: from 4°C to +40 °C - Maximum flow rate: 11 m³/h

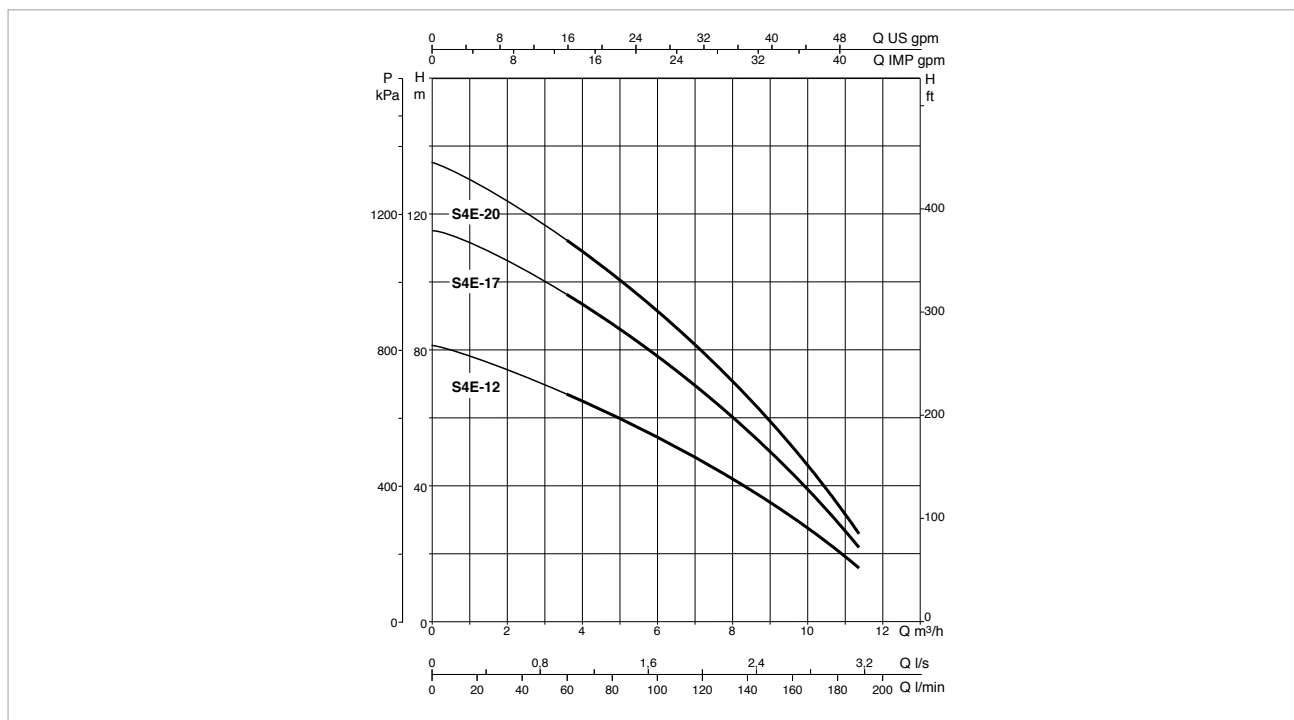

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

SETS WITH 1 S4E SUBMERGED PUMP

MODEL	POWER INPUT 50 Hz	P2 NOMINAL		In (A)	CONTROL PANEL MODEL	MAX FLOW RATE m ³ /h	MAX OBTAINABLE PRESSURE	STANDARD PRESSURE (bar)
		kW	Hp					
1 S4E 12 T 400/50 EN 12845	3 x 400 V 50 Hz	1,5	2	4,4	EGES 1.5T 400/50-60	11	8	6,5
1 S4E 17 T 400/50 EN 12845	3 x 400 V 50 Hz	2,2	3	5,9	EGES 2.2T 400/50-60	11	11,4	9
1 S4E 20 T 400/50 EN 12845	3 x 400 V 50 Hz	3	4	8,3	EGES 3T 400/50-60	11	13,5	11


SETS WITH 1 S4E SUBMERGED PUMP + JOCKEY PUMP

MODEL	POWER INPUT 50 Hz	P2 NOMINAL		In (A)	CONTROL PANEL MODEL	MAX FLOW RATE m ³ /h	MAX OBTAINABLE PRESSURE	STANDARD PRESSURE (bar)
		kW	Hp					
1 S4E 12 T 400/50 EN 12845 - S4C 19 T	3 x 400 V 50 Hz	1,5	2	4,4	EGES 1.5T 400/50-60	11	8	6,5
	3 x 400 V 50-60 Hz*	1,1*	1,5*	3,4*	JFF 3 T*	4,2*	10,4*	8,0*
1 S4E 17 T 400/50 EN 12845 - S4C 25 T	3 x 400 V 50 Hz	2,2	3	5,9	EGES 2.2T 400/50-60	11	11,4	9
	3 x 400 V 50-60 Hz*	1,5*	2,0*	4,4*	JFF 3 T*	4,2*	13,7*	11,0*
1 S4E 20 T 400/50 EN 12845 - S4C 25 T	3 x 400 V 50 Hz	3	4	8,3	EGES 3T 400/50-60	11	13,5	11
	3 x 400 V 50-60 Hz*	1,5*	2,0*	4,4*	JFF 3 T*	4,2*	13,7*	11,0*


* Jockey pump

S4 SETS - UNI EN 12845 FIRE-FIGHTING SETS

SETS WITH 1 SUBMERGED PUMP

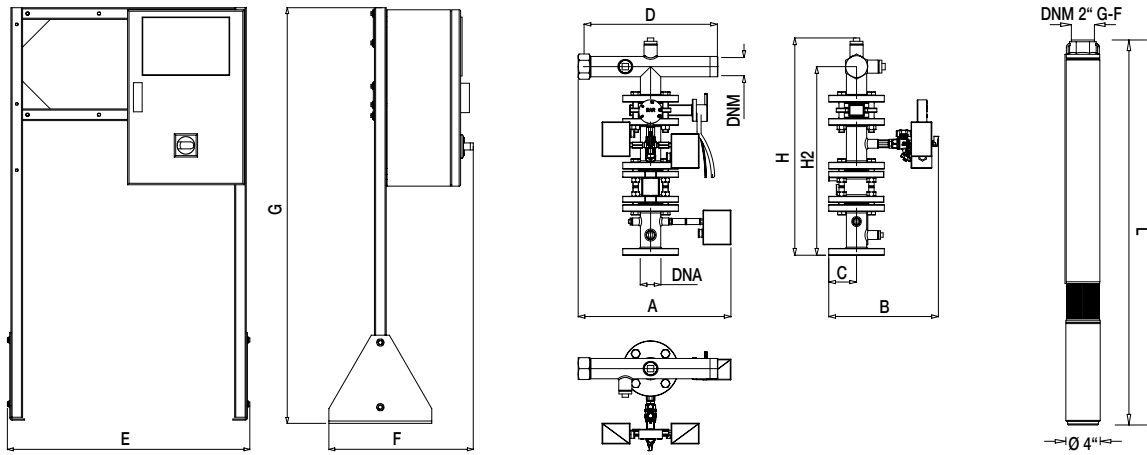


SETS WITH 1 SUBMERGED PUMP + JOCKEY PUMP

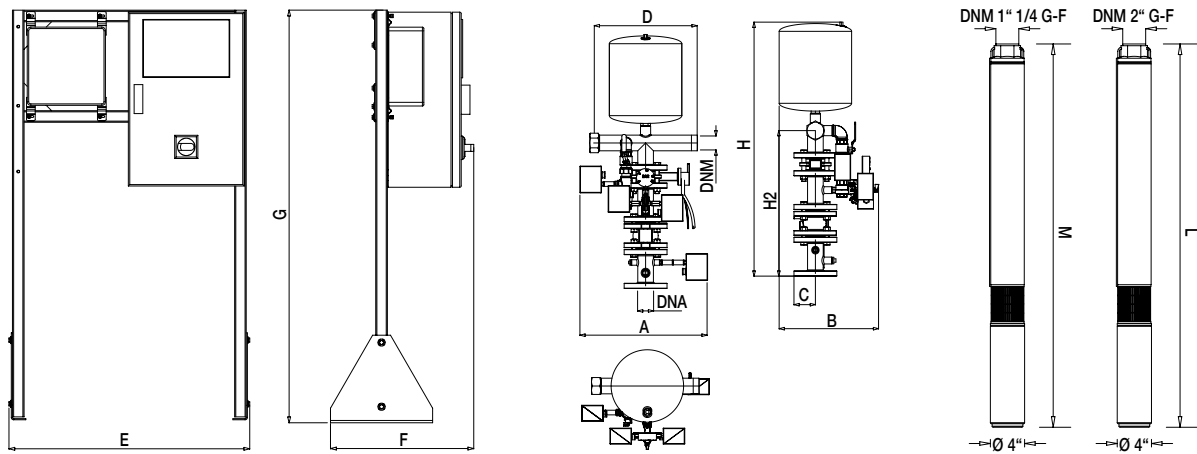

MODEL	A	B	C	D	E	F	G	H	H2	L	M	DNA	DNM	Ø P	Ø P1	PACKING (b x p x h)	WEIGHT Kg
1 S4E 12 T 400/50 EN 12845	455	325	83	395	830	490	1415	645	560	1163	-	50	50	-	-	1000 x 1400 x 2200	137
1 S4E 17 T 400/50 EN 12845	455	325	83	395	830	490	1415	645	560	1502	-	50	50	-	-	1000 x 1400 x 2200	142
1 S4E 20 T 400/50 EN 12845	455	325	83	395	830	490	1415	645	560	1894	-	50	50	-	-	1000 x 1400 x 2200	145
1 S4E 12 T 400/50 EN 12845 - S4C 19 T	490	385	83	395	830	490	1415	980	560	1163	1086	50	50	-	-	1000 x 1400 x 2200	172
1 S4E 17 T 400/50 EN 12845 - S4C 25 T	490	385	83	395	830	490	1415	980	560	1502	1343	50	50	-	-	1000 x 1400 x 2200	180
1 S4E 20 T 400/50 EN 12845 - S4C 25 T	490	385	83	395	830	490	1415	980	560	1894	1343	50	50	-	-	1000 x 1400 x 2200	185

S4 SETS - UNI EN 12845 FIRE-FIGHTING SETS

Pumped liquid temperature range: from 0°C to +40°C - Maximum ambient temperature: from 4°C to +40 °C - Maximum flow rate: 27 m³/h

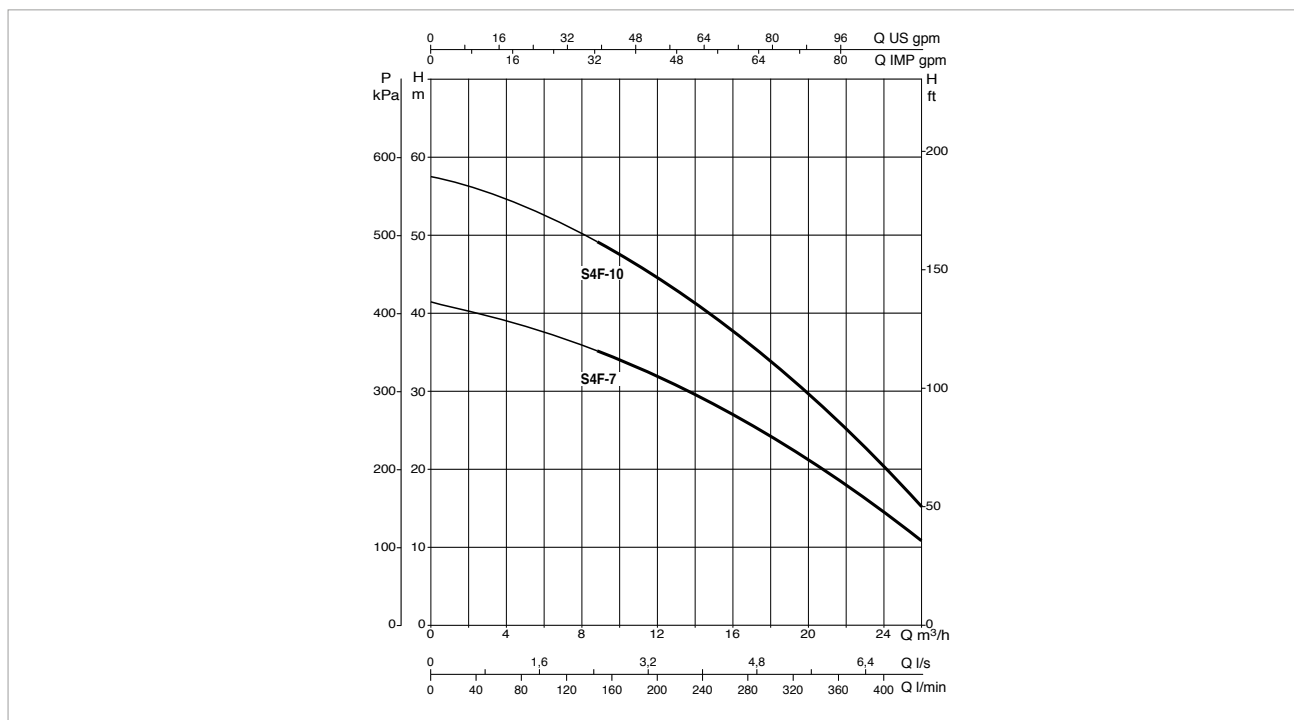

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

SETS WITH 1 S4F SUBMERGED PUMP

MODEL	POWER INPUT 50 Hz	P2 NOMINAL		In (A)	CONTROL PANEL MODEL	MAX FLOW RATE m³/h	MAX OBTAINABLE PRESSURE	STANDARD PRESSURE (bar)
		kW	Hp					
1 S4F 7 T 400/50 EN 12845	3 x 400 V 50 Hz	2,2	3	5,9	EGES 2.2T 400/50-60	27	4	3
1 S4F 10 T 400/50 EN 12845	3 x 400 V 50 Hz	3	4	8,3	EGES 3T 400/50-60	27	5,8	4,5


SETS WITH 1 S4F SUBMERGED PUMP + JOCKEY PUMP

MODEL	POWER INPUT 50 Hz	P2 NOMINAL		In (A)	CONTROL PANEL MODEL	MAX FLOW RATE m³/h	MAX OBTAINABLE PRESSURE	STANDARD PRESSURE (bar)
		kW	Hp					
1 S4F 7 T 400/50 EN 12845 - S4C 13 T	3 x 400 V 50 Hz	2,2	3	5,9	EGES 2.2T 400/50-60	27	4	3
	3 x 400 V 50-60 Hz*	0,75*	1,0*	2,4*	JFF 3 T*	4,2*	7,1*	6,0*
1 S4F 10 T 400/50 EN 12845 - S4C 13 T	3 x 400 V 50 Hz	3	4	8,3	EGES 3T 400/50-60	27	5,8	4,5
	3 x 400 V 50-60 Hz*	0,75*	1,0*	2,4*	JFF 3 T*	4,2*	7,1*	6,0*


* Jockey pump

S4 SETS - UNI EN 12845 FIRE-FIGHTING SETS

SETS WITH 1 SUBMERGED PUMP

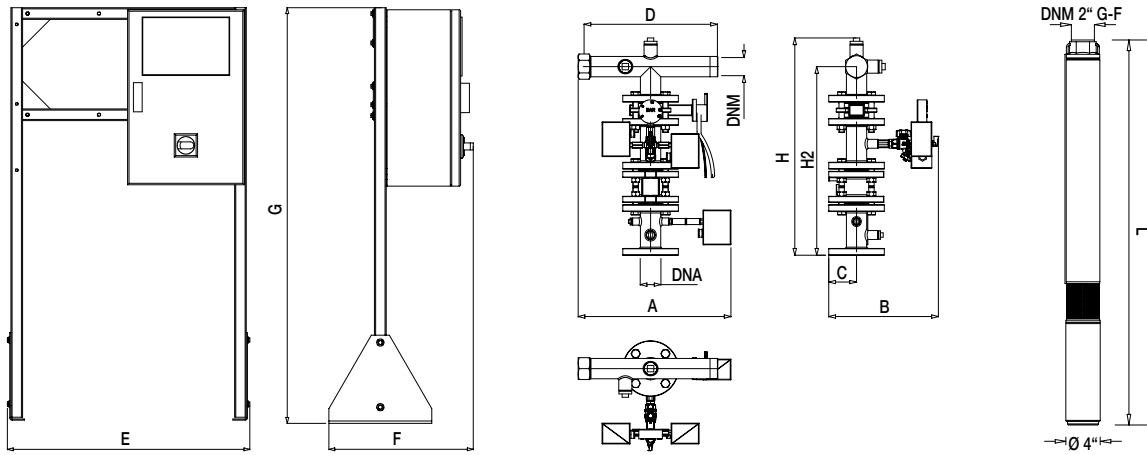


SETS WITH 1 SUBMERGED PUMP + JOCKEY PUMP

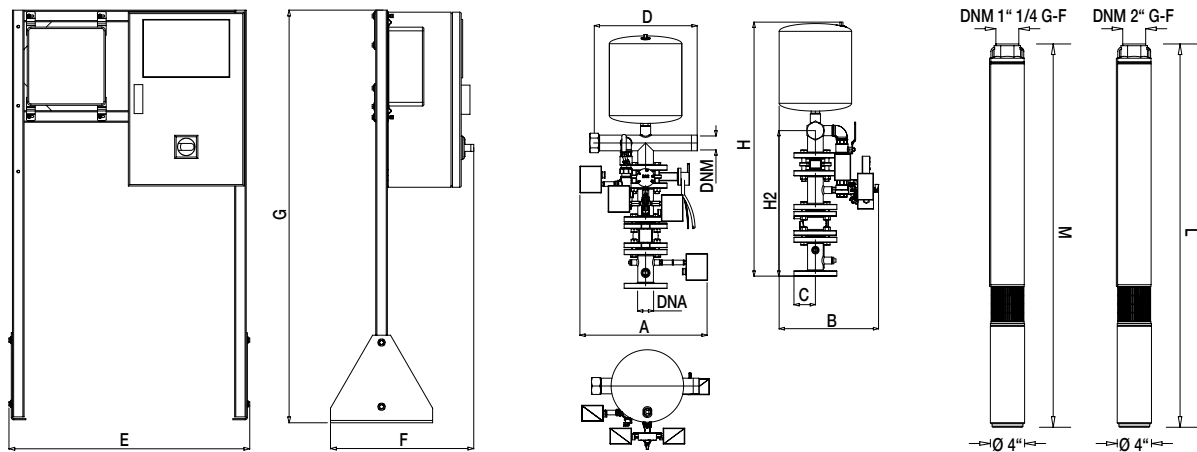

MODEL	A	B	C	D	E	F	G	H	H2	L	M	DNA	DNM	Ø P	Ø P1	PACKING (b x p x h)	WEIGHT Kg
1 S4F 7 T 400/50 EN 12845	455	325	83	395	830	490	1415	645	560	1079	-	50	50	-	-	1000 x 1400 x 2200	125
1 S4F 10 T 400/50 EN 12845	455	325	83	395	830	490	1415	645	560	1491	-	50	50	-	-	1000 x 1400 x 2200	129
1 S4F 7 T 400/50 EN 12845 - S4C 13 T	490	385	83	395	830	490	1415	980	560	1079	871	50	50	-	-	1000 x 1400 x 2200	185
1 S4F 10 T 400/50 EN 12845 - S4C 13 T	490	385	83	395	830	490	1415	980	560	1491	871	50	50	-	-	1000 x 1400 x 2200	190

S4 SETS - UNI EN 12845 FIRE-FIGHTING SETS

Pumped liquid temperature range: from 0°C to +40°C - Maximum ambient temperature: from 4°C to +40 °C - Maximum flow rate: 27 m³/h

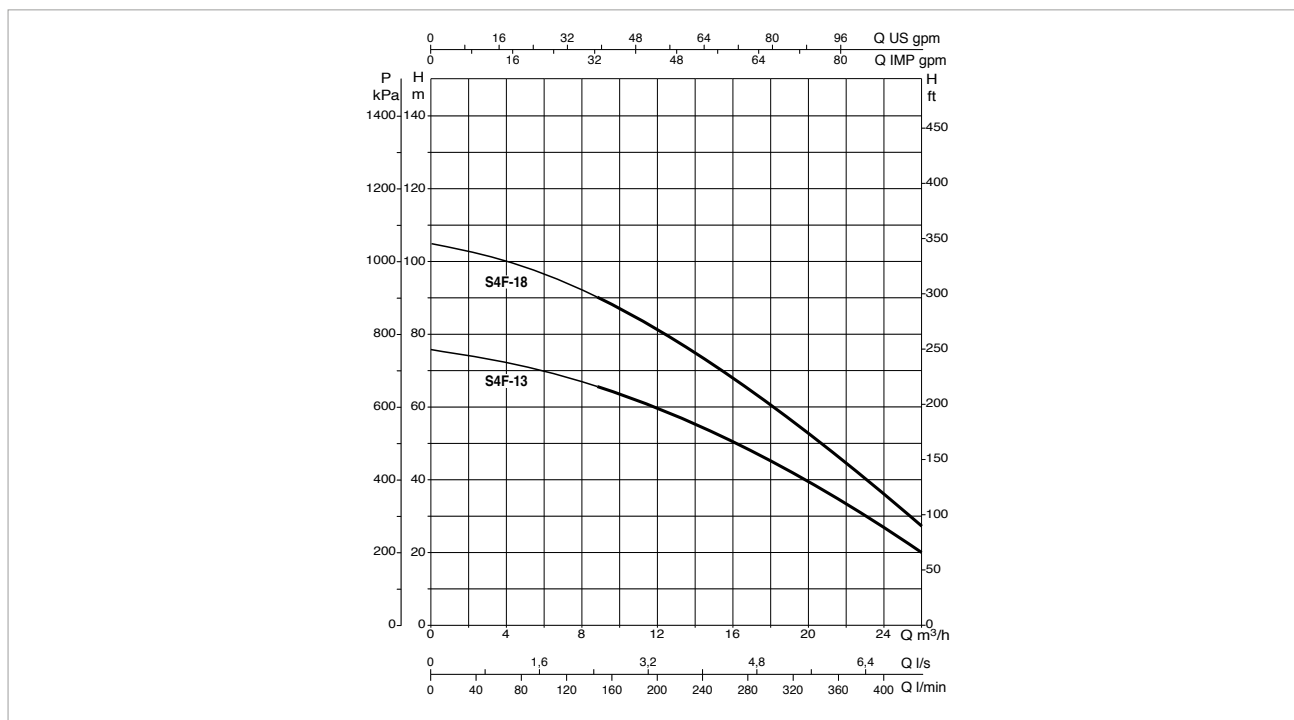

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

SETS WITH 1 S4F SUBMERGED PUMP

MODEL	POWER INPUT 50 Hz	P2 NOMINAL		In (A)	CONTROL PANEL MODEL	MAX FLOW RATE m³/h	MAX OBTAINABLE PRESSURE	STANDARD PRESSURE (bar)
		kW	Hp					
1 S4F 13 T 400/50 EN 12845	3 x 400 V 50 Hz	4	5,5	10	EGES 4T 400/50-60	27	7,6	6
1 S4F 18 T 400/50 EN 12845	3 x 400 V 50 Hz	5,5	7,5	14	EGES 5.5T 400/50-60	27	10,4	8


SETS WITH 1 S4F SUBMERGED PUMP + JOCKEY PUMP

MODEL	POWER INPUT 50 Hz	P2 NOMINAL		In (A)	CONTROL PANEL MODEL	MAX FLOW RAT m³/h	MAX OBTAINABLE PRESSURE	STANDARD PRESSURE (bar)
		kW	Hp					
1 S4F 13 T 400/50 EN 12845 - S4C 19 T	3 x 400 V 50 Hz	4	5,5	10	EGES 4T 400/50-60	27	7,6	6
	3 x 400 V 50-60 Hz*	1,1*	1,5*	3,4*	JFF 3 T*	4,2*	10,4*	8,0*
1 S4F 18 T 400/50 EN 12845 - S4C 25 T	3 x 400 V 50 Hz	5,5	7,5	14	EGES 5.5T 400/50-60	27	10,4	8
	3 x 400 V 50-60 Hz*	1,5*	2,0*	4,4*	JFF 3 T*	4,2*	13,7*	11,0*


* Jockey pump

S4 SETS - UNI EN 12845 FIRE-FIGHTING SETS

SETS WITH 1 SUBMERGED PUMP

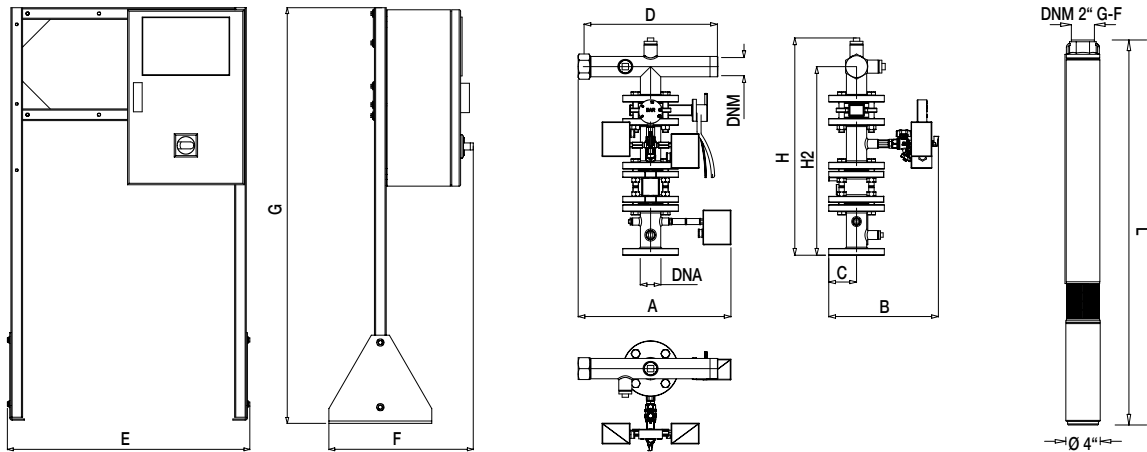


SETS WITH 1 SUBMERGED PUMP + JOCKEY PUMP

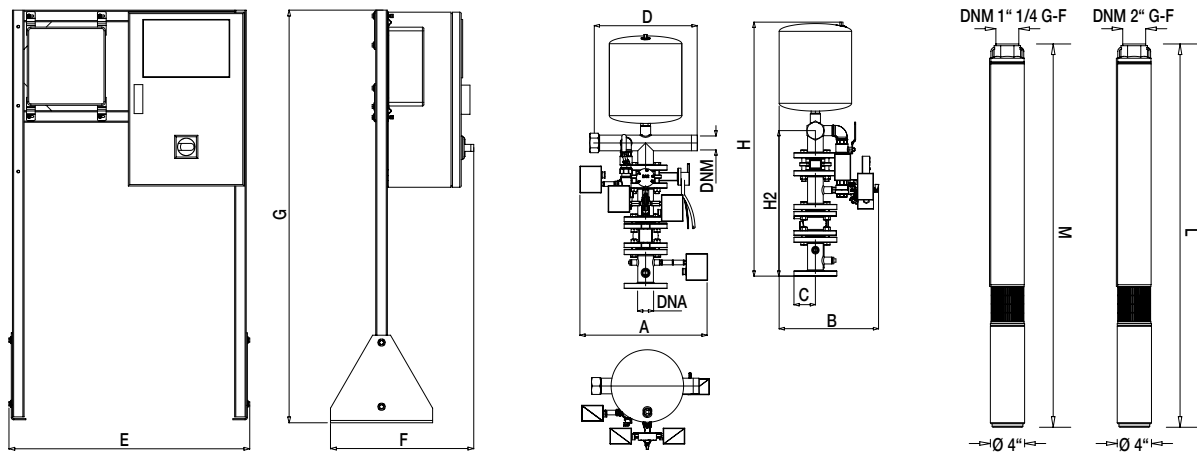

MODEL	A	B	C	D	E	F	G	H	H2	L	M	DNA	DNM	Ø P	Ø P1	PACKING (b x p x h)	WEIGHT Kg
1 S4F 13 T 400/50 EN 12845	455	325	83	395	830	490	1415	645	560	1715	-	50	50	-	-	1000 x 1400 x 2200	153
1 S4F 18 T 400/50 EN 12845	455	325	83	395	830	490	1415	645	560	2156	-	50	50	-	-	1000 x 1400 x 2200	175
1 S4F 13 T 400/50 EN 12845 - S4C 19 T	490	385	83	395	830	490	1415	980	560	1715	1086	50	50	-	-	1000 x 1400 x 2200	182
1 S4F 18 T 400/50 EN 12845 - S4C 25 T	490	385	83	395	830	490	1415	980	560	2156	1343	50	50	-	-	1000 x 1400 x 2200	213

SS6 SETS - UNI EN 12845 FIRE-FIGHTING SETS

Pumped liquid temperature range: from 0°C to +40°C - Maximum ambient temperature: from 4°C to +40 °C - Maximum flow rate: 36 m³/h

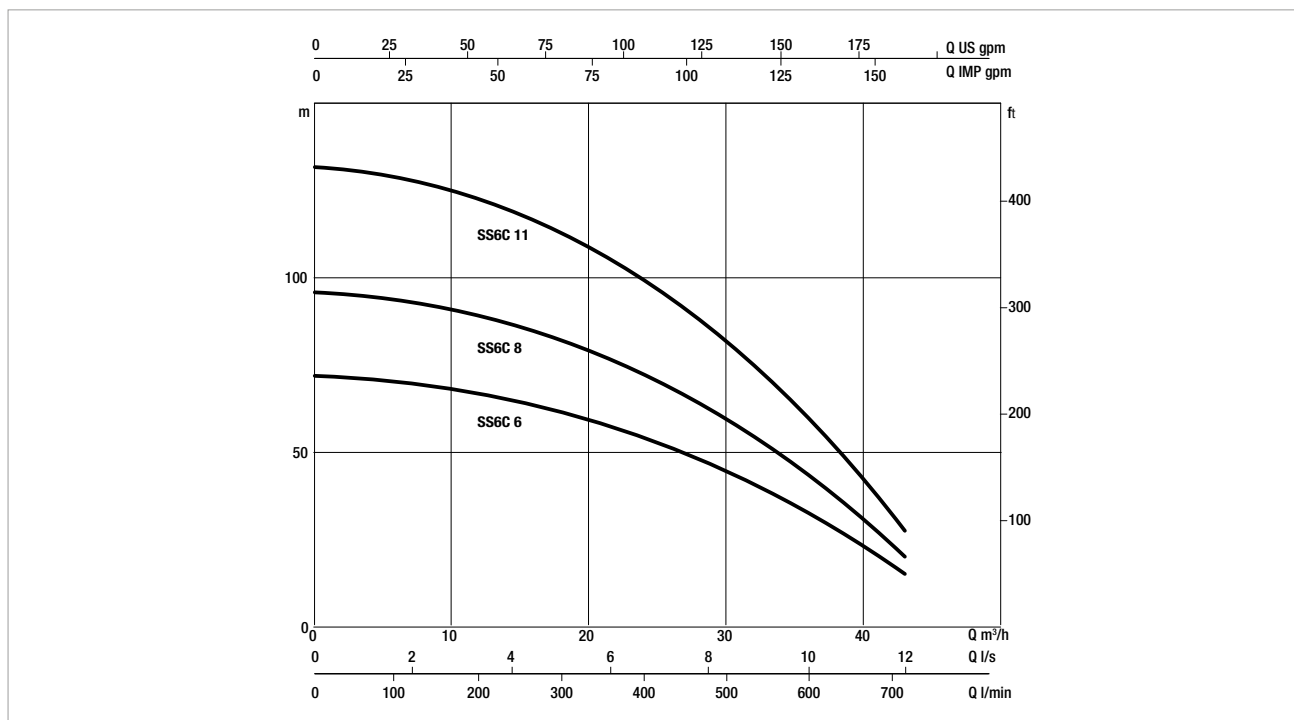

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

SETS WITH 1 SS6C SUBMERGED PUMP

MODEL	POWER INPUT 50 Hz	P2 NOMINAL		In (A)	CONTROL PANEL MODEL	MAX FLOW RATE m³/h	MAX OBTAINABLE PRESSURE	STANDARD PRESSURE (bar)
		kW	Hp					
1 SS6 C06 T 400/50 EN 12845	3 x 400 V 50 Hz	5,5	7,5	14	EGES 5.5T 400/50-60	36	6,1	4,5
1 SS6 C08 T 400/50 EN 12845	3 x 400 V 50 Hz	7,5	10	18	EGES 7.5T 400/50-60	36	9,1	7
1 SS6 C11 T 400/50 EN 12845	3 x 400 V 50 Hz	9,2	12,5	22	EGES 9.2T SD 400/50-60	36	12,2	9,5


SETS WITH 1 SS6C SUBMERGED PUMP + JOCKEY PUMP

MODEL	POWER INPUT 50 Hz	P2 NOMINAL		In (A)	CONTROL PANEL MODEL	MAX FLOW RATE m³/h	MAX OBTAINABLE PRESSURE	STANDARD PRESSURE (bar)
		kW	Hp					
1 SS6 C06 T 400/50 EN 12845 - S4C 19 T	3 x 400 V 50 Hz	5,5	7,5	14	EGES 5.5T 400/50-60	36	6,1	4,5
	3 x 400 V 50-60 Hz*	1,1*	1,5*	3,4*	JFF 3 T*	4,2*	10,4*	8,0*
1 SS6 C08 T 400/50 EN 12845 - S4C 19 T	3 x 400 V 50 Hz	7,5	10	18	EGES 7.5T 400/50-60	36	9,1	7
	3 x 400 V 50-60 Hz*	1,1*	1,5*	3,4*	JFF 3 T*	4,2*	10,4*	8,0*
1 SS6 C11 T 400/50 EN 12845 - S4C 25 T	3 x 400 V 50 Hz	9,2	12,5	22	EGES 9.2T SD 400/50-60	36	12,2	9,5
	3 x 400 V 50-60 Hz*	1,5*	2,0*	4,4*	JFF 3 T*	4,2*	13,7*	11,0*

* Jockey pump

SS6 SETS - UNI EN 12845 FIRE-FIGHTING SETS

Pumped liquid temperature range: from 0°C to +40°C - Maximum ambient temperature: from 4°C to +40 °C - Maximum flow rate: 48 m³/h

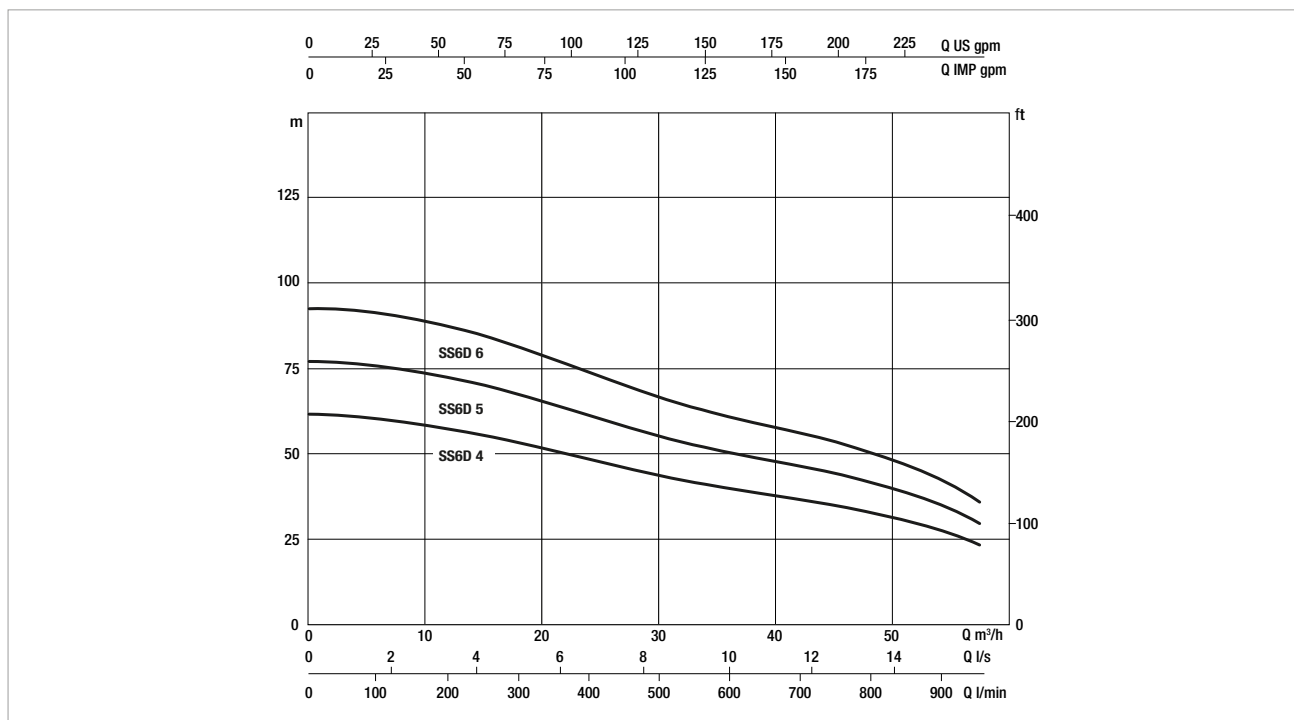

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

SETS WITH 1 SS6D SUBMERGED PUMP

MODEL	POWER INPUT 50 Hz	P2 NOMINAL		In (A)	CONTROL PANEL MODEL	MAX FLOW RATE m ³ /h	MAX OBTAINABLE PRESSURE	STANDARD PRESSURE (bar)
		kW	Hp					
1 SS6 D04 T 400/50 EN 12845	3 x 400 V 50 Hz	7,5	10	18	EGES 7.5T 400/50-60	48	4,8	3,5
1 SS6 D05 T 400/50 EN 12845	3 x 400 V 50 Hz	7,5	10	18	EGES 7.5T 400/50-60	48	6,3	5
1 SS6 D06 T 400/50 EN 12845	3 x 400 V 50 Hz	9,2	12,5	22	EGES 9.2T SD 400/50-60	48	7,8	6


SETS WITH 1 SS6D SUBMERGED PUMP + JOCKEY PUMP

MODEL	POWER INPUT 50 Hz	P2 NOMINAL		In (A)	CONTROL PANEL MODEL	MAX FLOW RATE m ³ /h	MAX OBTAINABLE PRESSURE	STANDARD PRESSURE (bar)
		kW	Hp					
1 SS6 D04 T 400/50 EN 12845 - S4C 13 T	3 x 400 V 50 Hz	7,5	10	18	EGES 7.5T 400/50-60	48	4,8	3,5
	3 x 400 V 50-60 Hz*	0,75*	1,0*	2,4*	JFF 3 T*	4,2*	7,1*	6,0*
1 SS6 D05 T 400/50 EN 12845 - S4C 19 T	3 x 400 V 50 Hz	7,5	10	18	EGES 7.5T 400/50-60	48	6,3	5
	3 x 400 V 50-60 Hz*	1,1*	1,5*	3,4*	JFF 3 T*	4,2*	10,4*	8,0*
1 SS6 D06 T 400/50 EN 12845 - S4C 19 T	3 x 400 V 50 Hz	9,2	12,5	22	EGES 9.2T SD 400/50-60	48	7,8	6
	3 x 400 V 50-60 Hz*	1,1*	1,5*	3,4*	JFF 3 T*	4,2*	10,4*	8,0*


* Jockey pump

SS6 SETS - UNI EN 12845 FIRE-FIGHTING SETS

SETS WITH 1 SUBMERGED PUMP

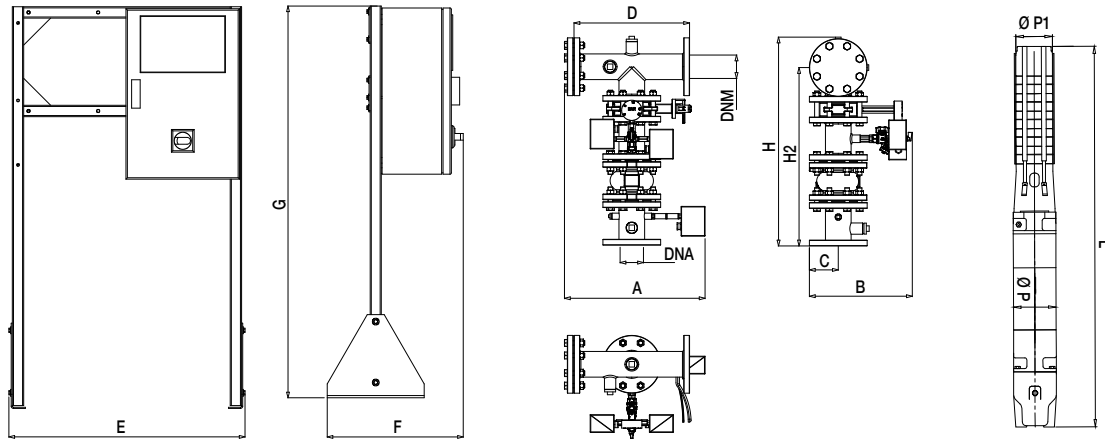


SETS WITH 1 SUBMERGED PUMP + JOCKEY PUMP

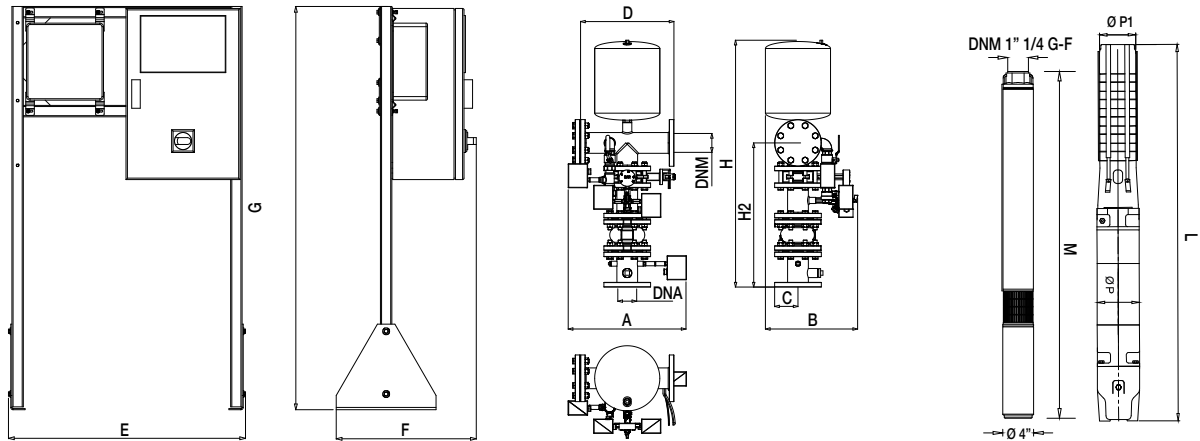

MODEL	A	B	C	D	E	F	G	H	H2	L	M	DNA	DNM	Ø P	Ø P1	PACKING (b x p x h)	WEIGHT Kg
1 SS6 D04 T 400/50 EN 12845	485	355	100	400	830	490	1415	725	615	1378	-	80	80	141	144	1000 x 1400 x 2200	196
1 SS6 D05 T 400/50 EN 12845	485	355	100	400	830	490	1415	725	615	1490	-	80	80	141	144	1000 x 1400 x 2200	200
1 SS6 D06 T 400/50 EN 12845	485	355	100	400	830	490	1415	725	615	1627	-	80	80	141	144	1000 x 1400 x 2200	192
1 SS6 D04 T 400/50 EN 12845 - S4C 13 T	505	395	100	400	830	490	1415	1055	615	1378	871	80	80	141	144	1000 x 1400 x 2200	228
1 SS6 D05 T 400/50 EN 12845 - S4C 19 T	505	395	100	400	830	490	1415	1055	615	1490	1086	80	80	141	144	1000 x 1400 x 2200	232
1 SS6 D06 T 400/50 EN 12845 - S4C 19 T	505	395	100	400	830	490	1415	1055	615	1627	1086	80	80	141	144	1000 x 1400 x 2200	237

SS6 SETS - UNI EN 12845 FIRE-FIGHTING SETS

Pumped liquid temperature range: from 0°C to +40°C - Maximum ambient temperature: from 4°C to +40 °C - Maximum flow rate: 48 m³/h

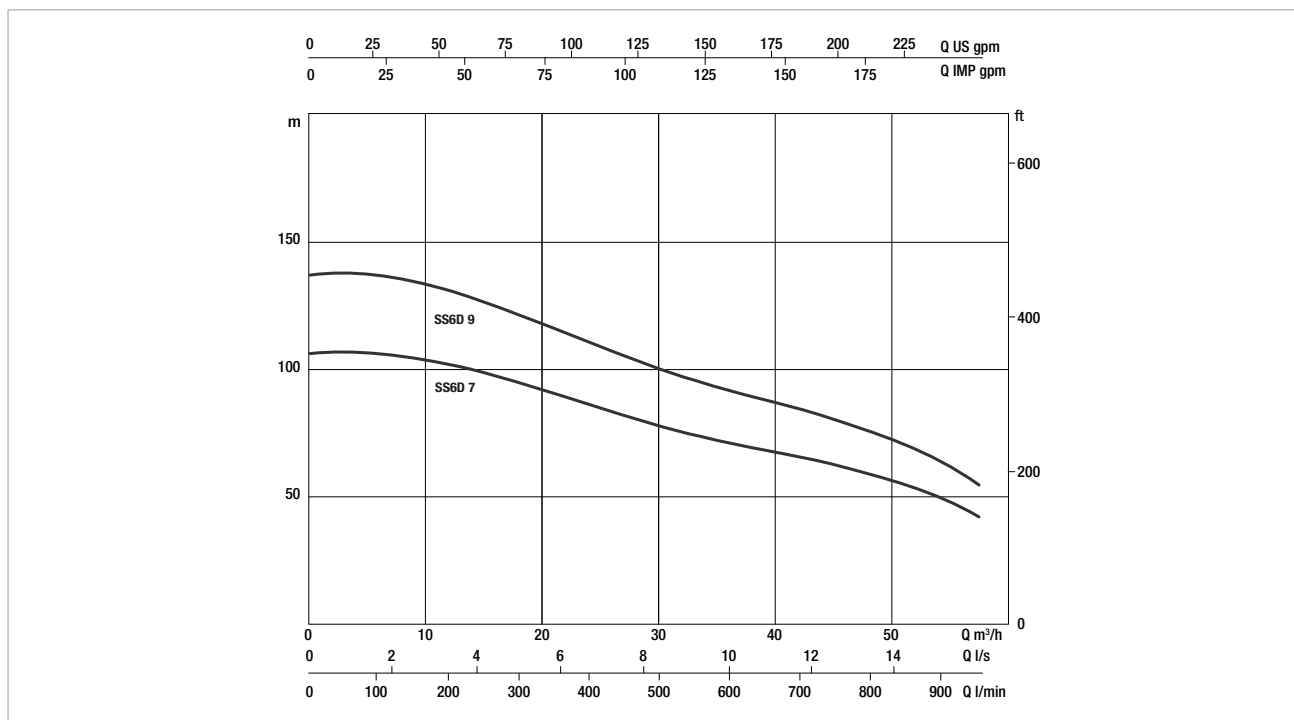

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

SETS WITH 1 SS6D SUBMERGED PUMP

MODEL	POWER INPUT 50 Hz	P2 NOMINAL		In (A)	CONTROL PANEL MODEL	MAX FLOW RATE m³/h	MAX OBTAINABLE PRESSURE	STANDARD PRESSURE (bar)
		kW	Hp					
1 SS6 D07 T 400/50 EN 12845	3 x 400 V 50 Hz	11	15	25,5	EGES 11T SD 400/50-60	48	9,4	7,5
1 SS6 D09 T 400/50 EN 12845	3 x 400 V 50 Hz	15	20	33,4	EGES 15T SD 400/50-60	48	12,6	10


SETS WITH 1 SS6D SUBMERGED PUMP + JOCKEY PUMP

MODEL	POWER INPUT 50 Hz	P2 NOMINAL		In (A)	CONTROL PANEL MODEL	MAX FLOW RATE m³/h	MAX OBTAINABLE PRESSURE	STANDARD PRESSURE (bar)
		kW	Hp					
1 SS6 D07 T 400/50 EN 12845 - S4C 19 T	3 x 400 V 50 Hz	11	15	25,5	EGES 11T SD 400/50-60	48	9,4	7,5
	3 x 400 V 50-60 Hz*	1,1*	1,5*	3,4*	JFF 3 T*	4,2*	10,4*	8,0*
1 SS6 D09 T 400/50 EN 12845 - S4C 25 T	3 x 400 V 50 Hz	15	20	33,4	EGES 15T SD 400/50-60	48	12,6	10
	3 x 400 V 50-60 Hz*	1,5*	2,0*	4,4*	JFF 3 T*	4,2*	13,7*	11,0*


* Jockey pump

SS6 SETS - UNI EN 12845 FIRE-FIGHTING SETS

SETS WITH 1 SUBMERGED PUMP

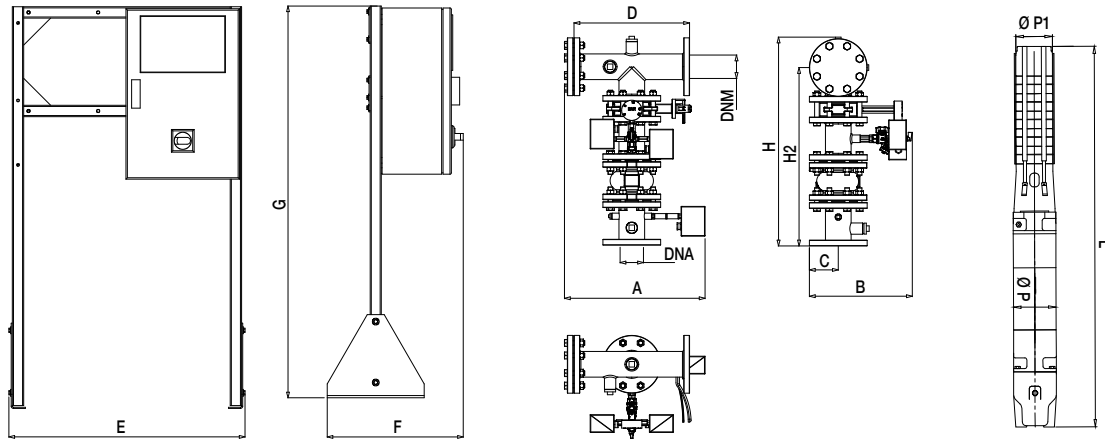


SETS WITH 1 SUBMERGED PUMP + JOCKEY PUMP

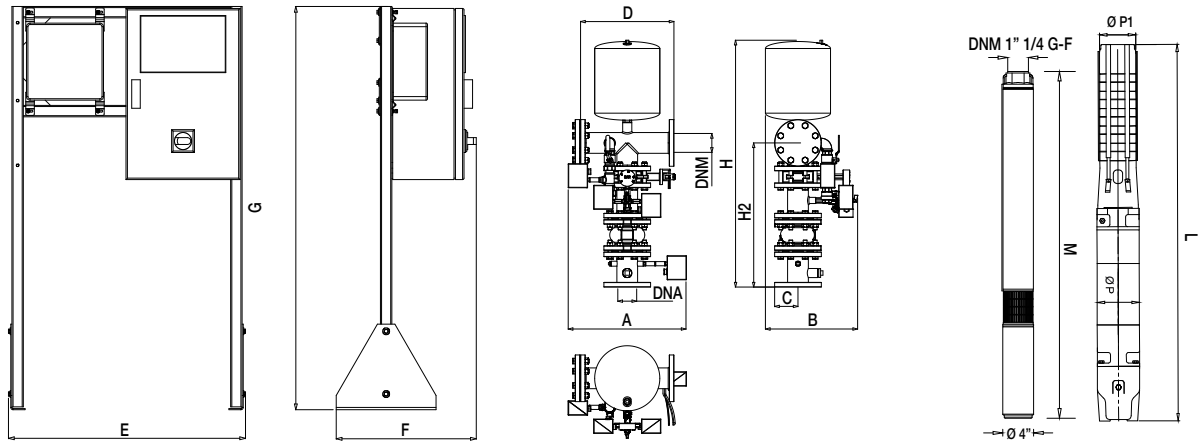

MODEL	A	B	C	D	E	F	G	H	H2	L	M	DNA	DNM	Ø P	Ø P1	PACKING (b x p x h)	WEIGHT Kg
1 SS6 D07 T 400/50 EN 12845	485	355	100	400	830	490	1415	725	615	1784	-	80	80	141	144	1000 x 1400 x 2200	197
1 SS6 D09 T 400/50 EN 12845	485	355	100	400	830	490	1415	725	615	2063	-	80	80	141	144	1000 x 1400 x 2200	202
1 SS6 D07 T 400/50 EN 12845 - S4C 19 T	505	395	100	400	830	490	1415	1055	615	1784	1086	80	80	141	144	1000 x 1400 x 2200	242
1 SS6 D09 T 400/50 EN 12845 - S4C 25 T	505	395	100	400	830	490	1415	1055	615	2063	1343	80	80	141	144	1000 x 1400 x 2200	265

SS6 SETS - UNI EN 12845 FIRE-FIGHTING SETS

Pumped liquid temperature range: from 0°C to +40°C - Maximum ambient temperature: from 4°C to +40 °C - Maximum flow rate: 66 m³/h

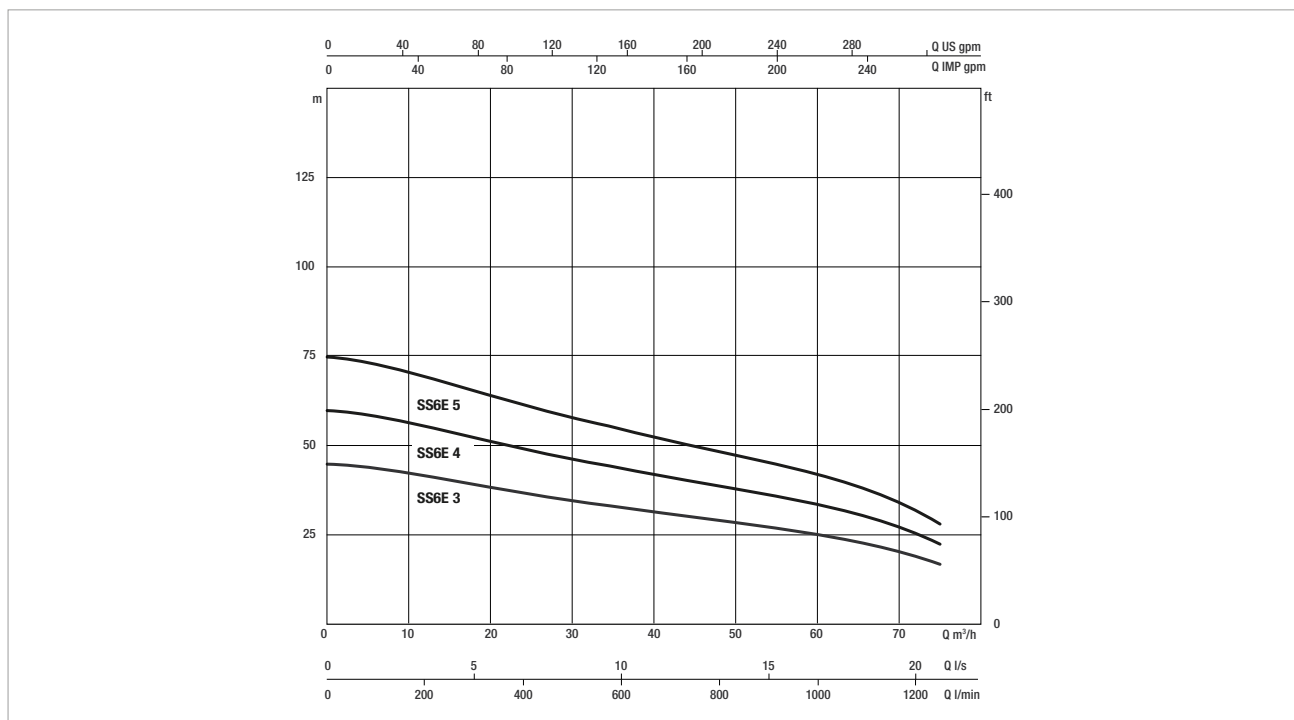

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

SETS WITH 1 SS6E SUBMERGED PUMP

MODEL	POWER INPUT 50 Hz	P2 NOMINAL		In (A)	CONTROL PANEL MODEL	MAX FLOW RATE m ³ /h	MAX OBTAINABLE PRESSURE	STANDARD PRESSURE (bar)
		kW	Hp					
1 SS6 E03 T 400/50 EN 12845	3 x 400 V 50 Hz	5,5	7,5	14	EGES 5.5T 400/50-60	66	4	3
1 SS6 E04 T 400/50 EN 12845	3 x 400 V 50 Hz	7,5	10	18	EGES 7.5T 400/50-60	66	5,2	4
1 SS6 E05 T 400/50 EN 12845	3 x 400 V 50 Hz	9,2	12,5	22	EGES 9.2T SD 400/50-60	66	6,5	5


SETS WITH 1 SS6E SUBMERGED PUMP + JOCKEY PUMP

MODEL	POWER INPUT 50 Hz	P2 NOMINAL		In (A)	CONTROL PANEL MODEL	MAX FLOW RATE m ³ /h	MAX OBTAINABLE PRESSURE	STANDARD PRESSURE (bar)
		kW	Hp					
1 SS6 E03 T 400/50 EN 12845 - S4C 13 T	3 x 400 V 50 Hz	5,5	7,5	14	EGES 5.5T 400/50-60	66	4	3
	3 x 400 V 50-60 Hz*	0,75*	1,0*	2,4*	JFF 3 T*	4,2*	7,1*	6,0*
1 SS6 E04 T 400/50 EN 12845 - S4C 13 T	3 x 400 V 50 Hz	7,5	10	18	EGES 7.5T 400/50-60	66	5,2	4
	3 x 400 V 50-60 Hz*	0,75*	1,0*	2,4*	JFF 3 T*	4,2*	7,1*	6,0*
1 SS6 E05 T 400/50 EN 12845 - S4C 19 T	3 x 400 V 50 Hz	9,2	12,5	22	EGES 9.2T SD 400/50-60	66	6,5	5
	3 x 400 V 50-60 Hz*	1,1*	1,5*	3,4*	JFF 3 T*	4,2*	10,4*	8,0*

* Jockey pump

SS6 SETS - UNI EN 12845 FIRE-FIGHTING SETS

Pumped liquid temperature range: from 0°C to +40°C - Maximum ambient temperature: from 4°C to +40 °C - Maximum flow rate: 66 m³/h

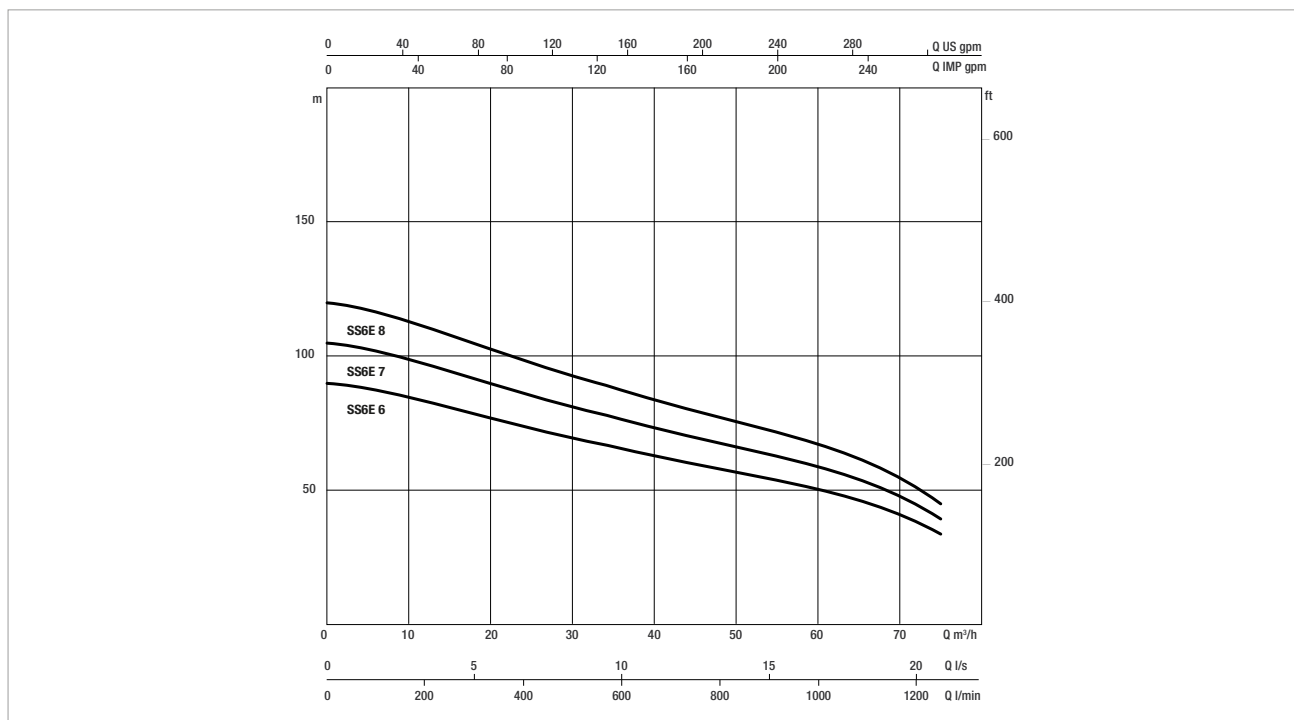

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

SETS WITH 1 SS6E SUBMERGED PUMP


MODEL	POWER INPUT 50 Hz	P2 NOMINAL		In (A)	CONTROL PANEL MODEL	MAX FLOW RATE m³/h	MAX OBTAINABLE PRESSURE	STANDARD PRESSURE (bar)
		kW	Hp					
1 SS6 E06 T 400/50 EN 12845	3 x 400 V 50 Hz	11	15	25,5	EGES 11T SD 400/50-60	66	7,8	6
1 SS6 E07 T 400/50 EN 12845	3 x 400 V 50 Hz	15	20	33,4	EGES 15T SD 400/50-60	66	10,4	8
1 SS6 E08 T 400/50 EN 12845	3 x 400 V 50 Hz	15	20	33,4	EGES 15T SD 400/50-60	66	11,8	9,5
1 SS6 E09 T 400/50 EN 12845	3 x 400 V 50 Hz	18,5	25	41	EGES 18.5T SD 400/50-60	66	13,5	10

SETS WITH 1 SS6E SUBMERGED PUMP + JOCKEY PUMP


MODEL	POWER INPUT 50 Hz	P2 NOMINAL		In (A)	CONTROL PANEL MODEL	MAX FLOW RATE m³/h	MAX OBTAINABLE PRESSURE	STANDARD PRESSURE (bar)
		kW	Hp					
1 SS6 E06 T 400/50 EN 12845 - S4C 19 T	3 x 400 V 50 Hz	11	15	25,5	EGES 11T SD 400/50-60	66	7,8	6
	3 x 400 V 50-60 Hz*	1,1*	1,5*	3,4*	JFF 3 T*	4,2*	10,4*	8,0*
1 SS6 E07 T 400/50 EN 12845 - S4C 25 T	3 x 400 V 50 Hz	15	20	33,4	EGES 15T SD 400/50-60	66	10,4	8
	3 x 400 V 50-60 Hz*	1,5*	2,0*	4,4*	JFF 3 T*	4,2*	13,7*	11,0*
1 SS6 E08 T 400/50 EN 12845 - S4C 25 T	3 x 400 V 50 Hz	15	20	33,4	EGES 15T SD 400/50-60	66	11,8	9,5
	3 x 400 V 50-60 Hz*	1,5*	2,0*	4,4*	JFF 3 T*	4,2*	13,7*	11,0*
1 SS6 E09 T 400/50 EN 12845 - S4C 25 T	3 x 400 V 50 Hz	18,5	25	41	EGES 18.5T SD 400/50-60	66	13,5	10
	3 x 400 V 50-60 Hz*	1,5*	2,0*	4,4*	JFF 3 T*	4,2*	13,7*	11,0*

SS6 SETS - UNI EN 12845 FIRE-FIGHTING SETS

SETS WITH 1 SUBMERGED PUMP

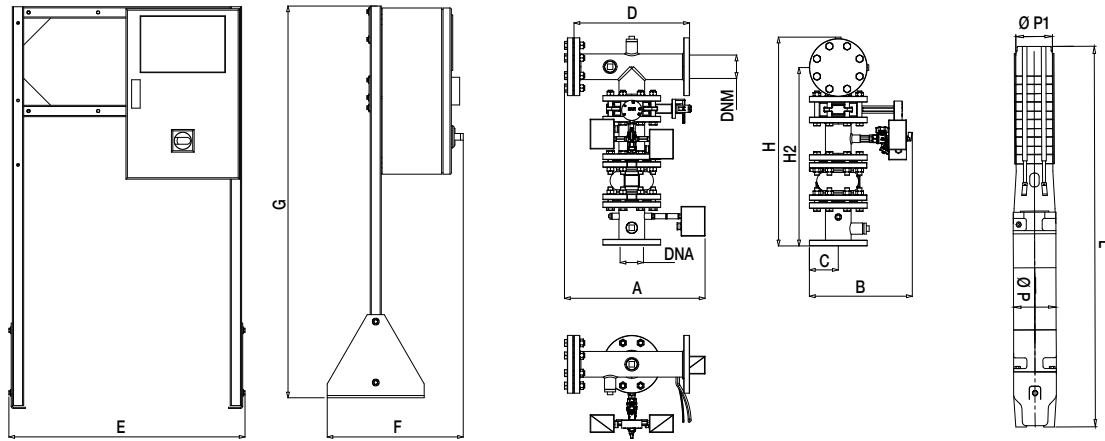


SETS WITH 1 SUBMERGED PUMP + JOCKEY PUMP

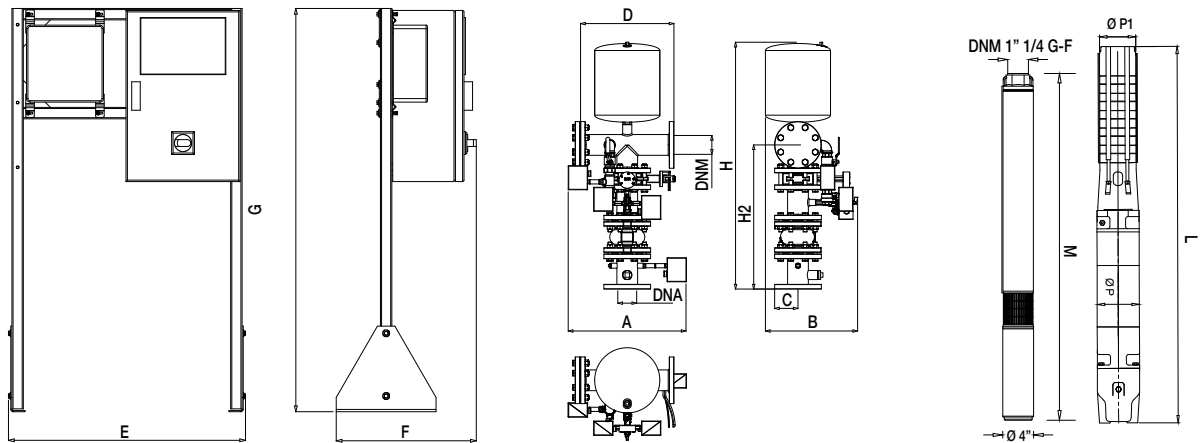

MODEL	A	B	C	D	E	F	G	H	H2	L	M	DNA	DNM	Ø P	Ø P1	PACKING (b x p x h)	WEIGHT Kg
1 SS6 E06 T 400/50 EN 12845	485	355	100	400	830	490	1415	725	615	1672	-	80	80	141	144	1000 x 1400 x 2200	126
1 SS6 E07 T 400/50 EN 12845	485	355	100	400	830	490	1415	725	615	1839	-	80	80	141	144	1000 x 1400 x 2200	150
1 SS6 E08 T 400/50 EN 12845	485	355	100	400	830	490	1415	725	615	1951	-	80	80	141	144	1000 x 1400 x 2200	225
1 SS6 E09 T 400/50 EN 12845	485	355	100	400	830	490	1415	745	635	2139	-	100	80	141	144	1000 x 1400 x 2200	369
1 SS6 E06 T 400/50 EN 12845 - S4C 19 T	505	395	100	400	830	490	1415	1055	615	1672	1086	80	80	141	144	1000 x 1400 x 2200	248
1 SS6 E07 T 400/50 EN 12845 - S4C 25 T	505	395	100	400	830	490	1415	1055	615	1839	1343	80	80	141	144	1000 x 1400 x 2200	158
1 SS6 E08 T 400/50 EN 12845 - S4C 25 T	505	395	100	400	830	490	1415	1055	615	1951	1343	80	80	141	144	1000 x 1400 x 2200	245
1 SS6 E09 T 400/50 EN 12845 - S4C 25 T	505	395	100	400	830	490	1415	1080	635	2139	1343	100	80	141	144	1000 x 1400 x 2200	400

SS7 SETS - UNI EN 12845 FIRE-FIGHTING SETS

Pumped liquid temperature range: from 0°C to +40°C - Maximum ambient temperature: from 4°C to +40 °C - Maximum flow rate: 100 m³/h

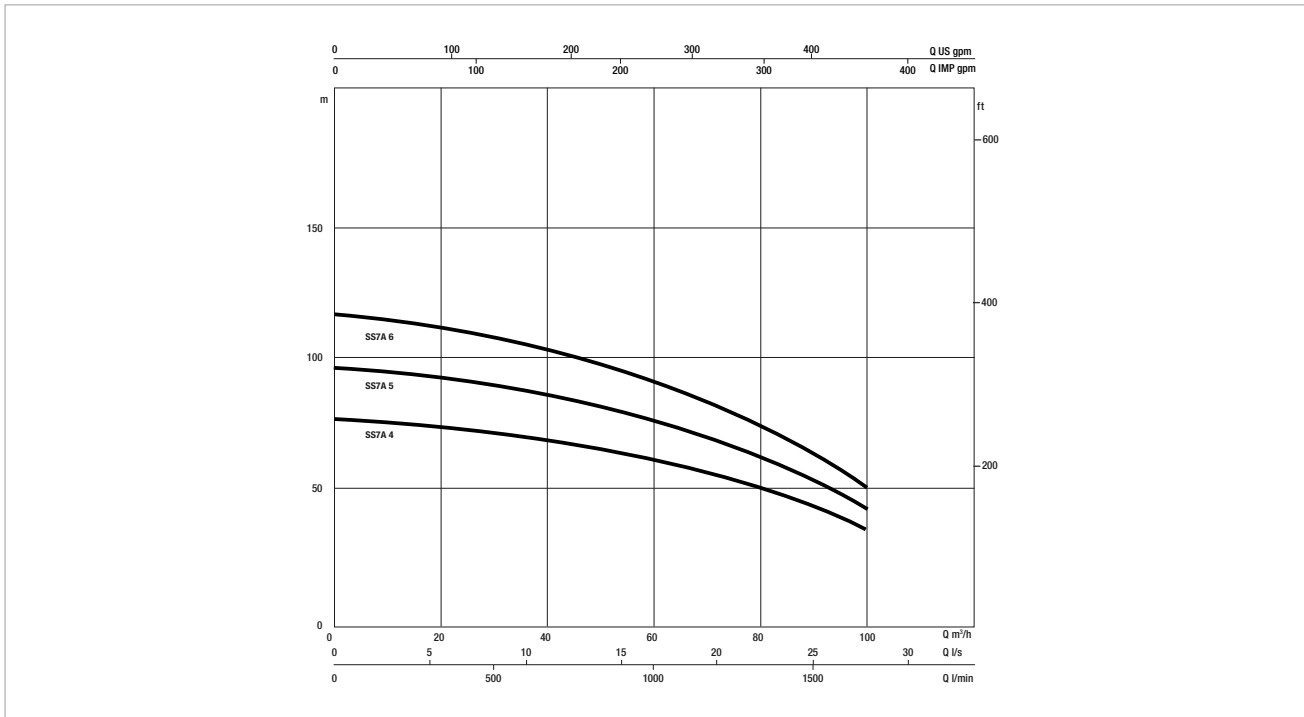

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

SETS WITH 1 SS7A SUBMERGED PUMP

MODEL	POWER INPUT 50 Hz	P2 NOMINAL		In (A)	CONTROL PANEL MODEL	MAX FLOW RATE m³/h	MAX OBTAINABLE PRESSURE	STANDARD PRESSURE (bar)
		kW	Hp					
1 SS7 A4 T 400/50 EN 12845	3 x 400 V 50 Hz	15	20	33,4	EGES 15T SD 400/50-60	100	7,4	6
1 SS7 A5 T 400/50 EN 12845	3 x 400 V 50 Hz	18,5	25	41	EGES 18.5T SD 400/50-60	100	10	8
1 SS7 A6 T 400/50 EN 12845	3 x 400 V 50 Hz	22	30	47	EGES 22T SD 400/50-60	100	12,6	10


SETS WITH 1 SS7A SUBMERGED PUMP + JOCKEY PUMP

MODEL	POWER INPUT 50 Hz	P2 NOMINAL		In (A)	CONTROL PANEL MODEL	MAX FLOW RATE m³/h	MAX OBTAINABLE PRESSURE	STANDARD PRESSURE (bar)
		kW	Hp					
1 SS7 A4 T 400/50 EN 12845 - S4C 19 T	3 x 400 V 50 Hz	15	20	33,4	EGES 15T SD 400/50-60	100	7,4	6
	3 x 400 V 50-60 Hz*	1,1*	1,5*	3,4*	JFF 3 T*	4,2*	10,4*	8,0*
1 SS7 A5 T 400/50 EN 12845 - S4C 19 T	3 x 400 V 50 Hz	18,5	25	41	EGES 18.5T SD 400/50-60	100	10	8
	3 x 400 V 50-60 Hz*	1,1*	1,5*	3,4*	JFF 3 T*	4,2*	10,4*	8,0*
1 SS7 A6 T 400/50 EN 12845 - S4C 25 T	3 x 400 V 50 Hz	22	30	47	EGES 22T SD 400/50-60	100	12,6	10
	3 x 400 V 50-60 Hz*	1,5*	2,0*	4,4*	JFF 3 T*	4,2*	13,7*	11,0*


* Jockey pump

SS7 SETS - UNI EN 12845 FIRE-FIGHTING SETS

SETS WITH 1 SUBMERGED PUMP

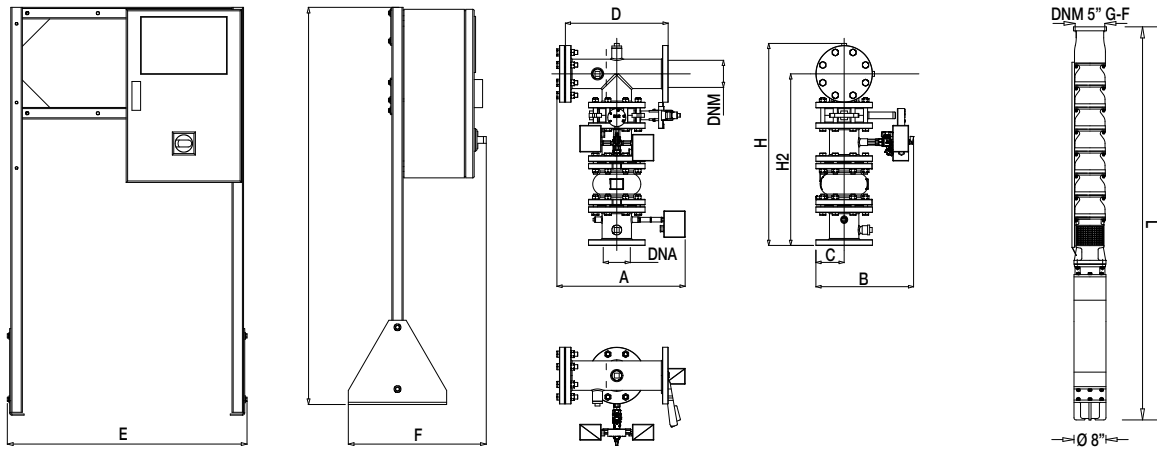


SETS WITH 1 SUBMERGED PUMP + JOCKEY PUMP

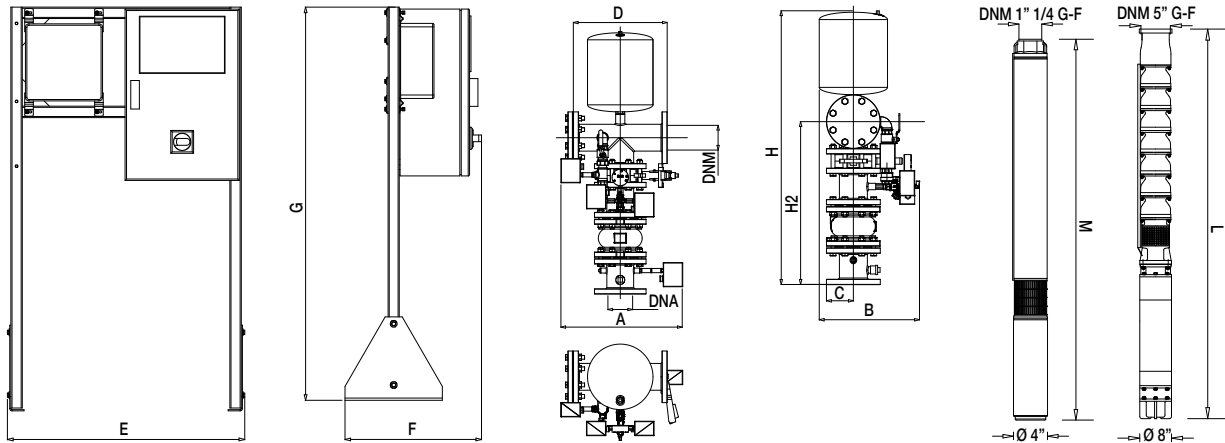

MODEL	A	B	C	D	E	F	G	H	H2	L	M	DNA	DNM	Ø P	Ø P1	PACKING (b x p x h)	WEIGHT Kg
1 SS7 A4 T 400/50 EN 12845	500	380	110	400	830	490	1415	785	665	1740	-	100	100	141	172	1000 x 1400 x 2200	260
1 SS7 A5 T 400/50 EN 12845	500	380	110	400	830	490	1415	785	665	1943	-	100	100	141	172	1000 x 1400 x 2200	265
1 SS7 A6 T 400/50 EN 12845	500	380	110	400	830	490	1415	785	665	2131	-	100	100	141	172	1000 x 1400 x 2200	278
1 SS7 A4 T 400/50 EN 12845 - S4C 19 T	520	410	110	400	830	490	1415	1120	665	1740	1086	100	100	141	172	1000 x 1400 x 2200	280
1 SS7 A5 T 400/50 EN 12845 - S4C 19 T	520	410	110	400	830	490	1415	1120	665	1943	1086	100	100	141	172	1000 x 1400 x 2200	285
1 SS7 A6 T 400/50 EN 12845 - S4C 25 T	520	410	110	400	830	490	1415	1120	665	2131	1343	100	100	141	172	1000 x 1400 x 2200	298

SS7 SETS - UNI EN 12845 FIRE-FIGHTING SETS

Pumped liquid temperature range: from 0°C to +40°C - Maximum ambient temperature: from 4°C to +40 °C - Maximum flow rate: 120 m³/h

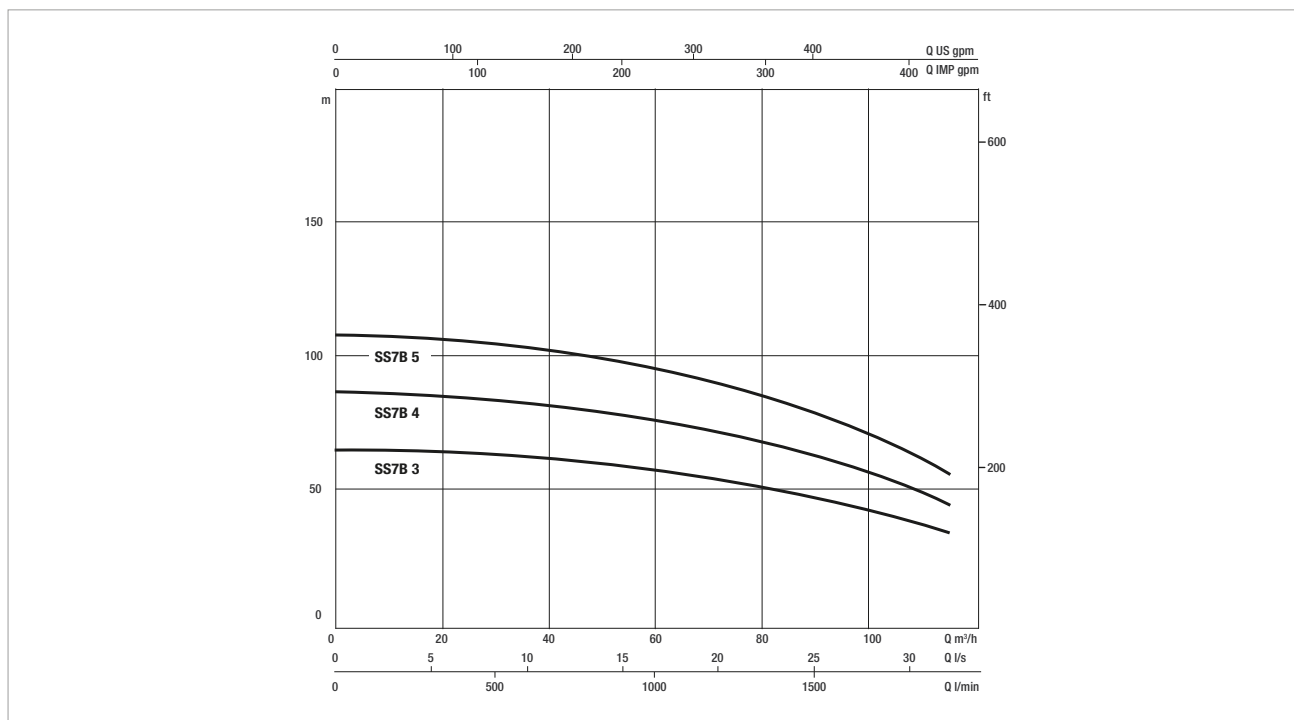

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

SETS WITH 1 SS7B SUBMERGED PUMP

MODEL	POWER INPUT 50 Hz	P2 NOMINAL		In (A)	CONTROL PANEL MODEL	MAX FLOW RATE m³/h	MAX OBTAINABLE PRESSURE	STANDARD PRESSURE (bar)
		kW	Hp					
1 SS7 B3 T 400/50 EN 12845	3 x 400 V 50 Hz	18,5	25	41	EGES 18.5T SD 400/50-60	120	7,9	6
1 SS7 B4 T 400/50 EN 12845	3 x 400 V 50 Hz	22	30	47	EGES 22T SD 400/50-60	120	10,6	8,5
1 SS7 B5 T 400/50 EN 12845	3 x 400 V 50 Hz	30	40	61,5	EGES 30T SD 400/50-60	120	13,4	10,5


SETS WITH 1 SS7B SUBMERGED PUMP + JOCKEY PUMP

MODEL	POWER INPUT 50 Hz	P2 NOMINAL		In (A)	CONTROL PANEL MODEL	MAX FLOW RATE m³/h	MAX OBTAINABLE PRESSURE	STANDARD PRESSURE (bar)
		kW	Hp					
1 SS7 B3 T 400/50 EN 12845 - S4C 19 T	3 x 400 V 50 Hz	18,5	25	41	EGES 18.5T SD 400/50-60	120	7,9	6
	3 x 400 V 50-60 Hz*	1,1*	1,5*	3,4*	JFF 3 T*	4,2*	10,4*	8,0*
1 SS7 B4 T 400/50 EN 12845 - S4C 25 T	3 x 400 V 50 Hz	22	30	47	EGES 22T SD 400/50-60	120	10,6	8,5
	3 x 400 V 50-60 Hz*	1,5*	2,0*	4,4*	JFF 3 T*	4,2*	13,7*	11,0*
1 SS7 B5 T 400/50 EN 12845 - S4C 25 T	3 x 400 V 50 Hz	30	40	61,5	EGES 30T SD 400/50-60	120	13,4	10,5
	3 x 400 V 50-60 Hz*	1,5*	2,0*	4,4*	JFF 3 T*	4,2*	13,7*	11,0*


* Jockey pump

SS7 SETS - UNI EN 12845 FIRE-FIGHTING SETS

SETS WITH 1 SUBMERGED PUMP

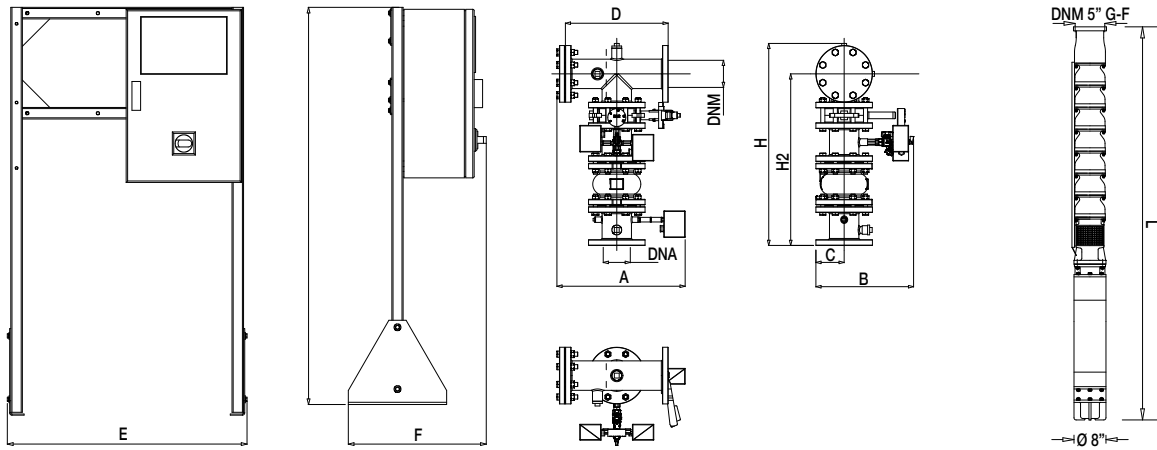


SETS WITH 1 SUBMERGED PUMP + JOCKEY PUMP

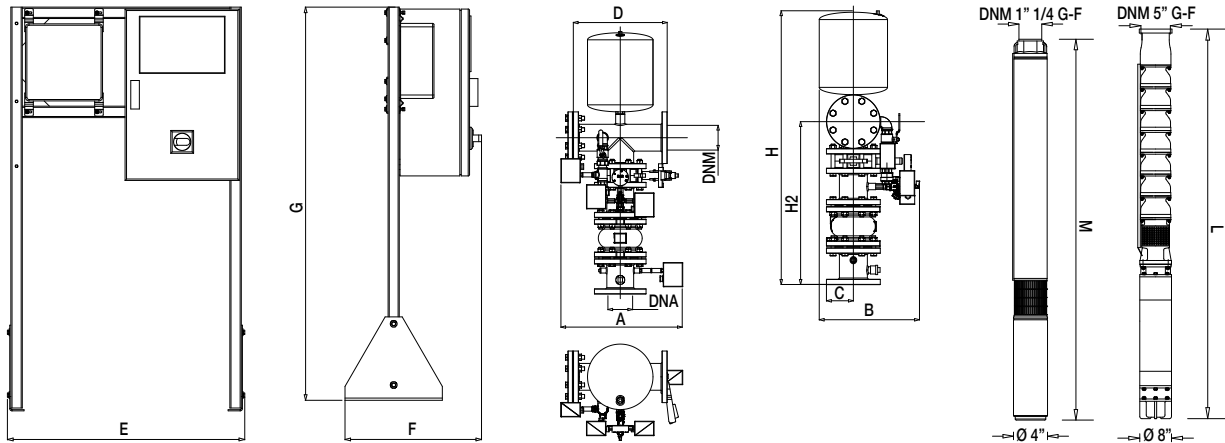

MODEL	A	B	C	D	E	F	G	H	H2	L	M	DNA	DNM	Ø P	Ø P1	PACKING (b x p x h)	WEIGHT Kg
1 SS7 B3 T 400/50 EN 12845	500	380	110	400	830	490	1415	785	665	1612	-	100	100	141	172	1000 x 1400 x 2200	275
1 SS7 B4 T 400/50 EN 12845	500	380	110	400	830	490	1415	785	665	1875	-	100	100	141	172	1000 x 1400 x 2200	280
1 SS7 B5 T 400/50 EN 12845	500	380	110	400	830	490	1415	785	665	2133	-	100	100	141	172	1000 x 1400 x 2200	285
1 SS7 B3 T 400/50 EN 12845 - S4C 19 T	520	410	110	400	830	490	1415	1120	665	1612	1086	100	100	141	172	1000 x 1400 x 2200	295
1 SS7 B4 T 400/50 EN 12845 - S4C 25 T	520	410	110	400	830	490	1415	1120	665	1875	1343	100	100	141	172	1000 x 1400 x 2200	300
1 SS7 B5 T 400/50 EN 12845 - S4C 25 T	520	410	110	400	830	490	1415	1120	665	2133	1343	100	100	141	172	1000 x 1400 x 2200	305

SS8 SETS - UNI EN 12845 FIRE-FIGHTING SETS

Pumped liquid temperature range: from 0°C to +40°C - Maximum ambient temperature: from 4°C to +40 °C - Maximum flow rate: 140 m³/h

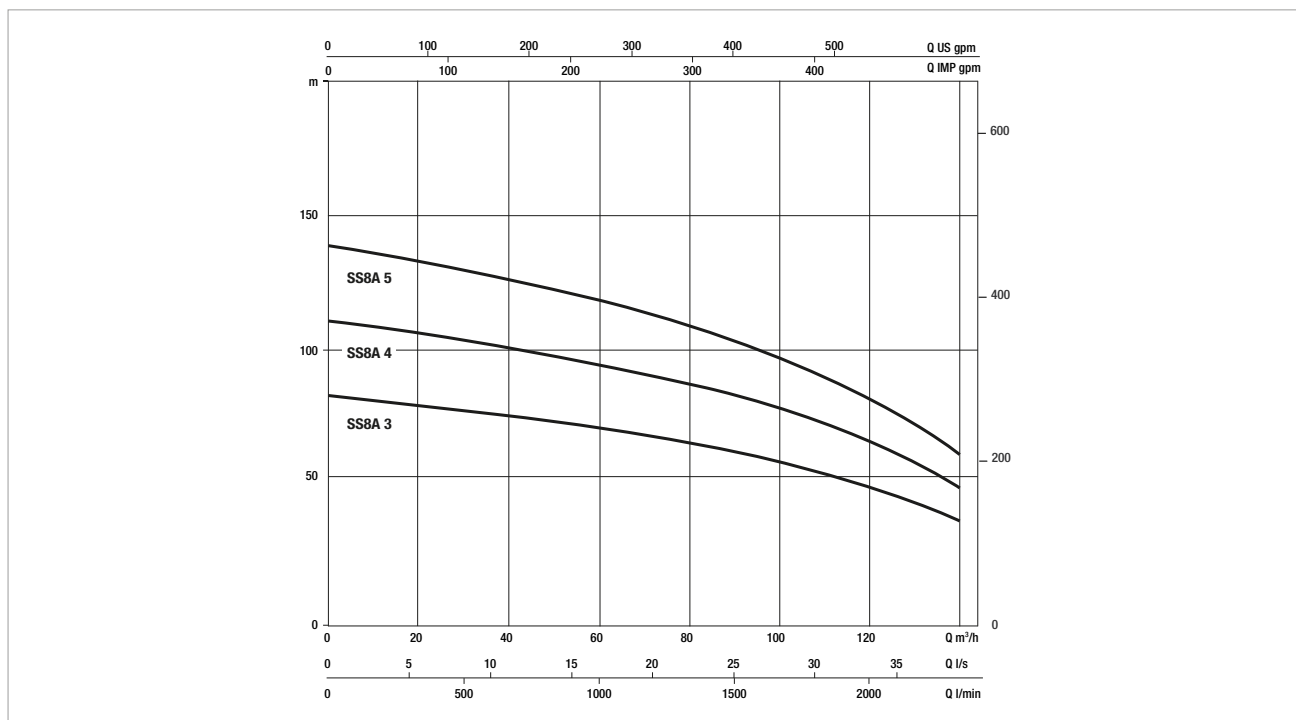

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

SETS WITH 1 SS8A SUBMERGED PUMP

MODEL	POWER INPUT 50 Hz	P2 NOMINAL		In (A)	CONTROL PANEL MODEL	MAX FLOW RATE m³/h	MAX OBTAINABLE PRESSURE	STANDARD PRESSURE (bar)
		kW	Hp					
1 SS8 A3 T 400/50 EN 12845	3 x 400 V 50 Hz	22	30	47	EGES 22T SD 400/50-60	140	7,4	6
1 SS8 A4 T 400/50 EN 12845	3 x 400 V 50 Hz	30	40	61,5	EGES 30T SD 400/50-60	140	10	8
1 SS8 A5 T 400/50 EN 12845	3 x 400 V 50 Hz	37	50	79,3	EGES 37T SD 400/50-60	140	12,7	7


SETS WITH 1 SS8A SUBMERGED PUMP + JOCKEY PUMP

MODEL	POWER INPUT 50 Hz	P2 NOMINAL		In (A)	CONTROL PANEL MODEL	MAX FLOW RATE m³/h	MAX OBTAINABLE PRESSURE	STANDARD PRESSURE (bar)
		kW	Hp					
1 SS8 A3 T 400/50 EN 12845 - S4C 19 T	3 x 400 V 50 Hz	22	30	47	EGES 22T SD 400/50-60	140	7,4	6
	3 x 400 V 50-60 Hz*	1,1*	1,5*	3,4*	JFF 3 T*	4,2*	10,4*	8,0*
1 SS8 A4 T 400/50 EN 12845 - S4C 19 T	3 x 400 V 50 Hz	30	40	61,5	EGES 30T SD 400/50-60	140	10	8
	3 x 400 V 50-60 Hz*	1,1*	1,5*	3,4*	JFF 3 T*	4,2*	10,4*	8,0*
1 SS8 A5 T 400/50 EN 12845 - S4C 25 T	3 x 400 V 50 Hz	37	50	79,3	EGES 37T SD 400/50-60	140	12,7	7
	3 x 400 V 50-60 Hz*	1,5*	2,0*	4,4*	JFF 3 T*	4,2*	13,7*	11,0*


* Jockey pump

SS8 SETS - UNI EN 12845 FIRE-FIGHTING SETS

SETS WITH 1 SUBMERGED PUMP

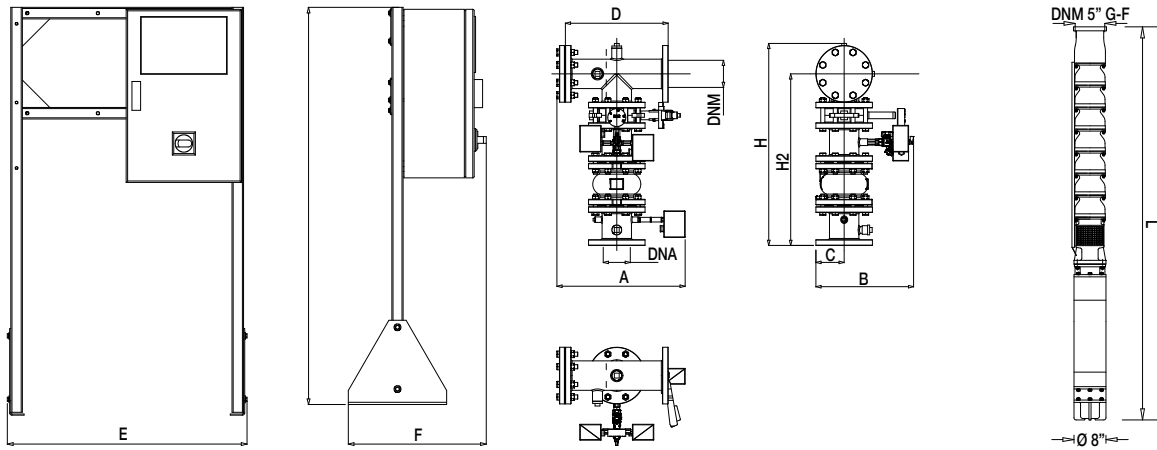


SETS WITH 1 SUBMERGED PUMP + JOCKEY PUMP

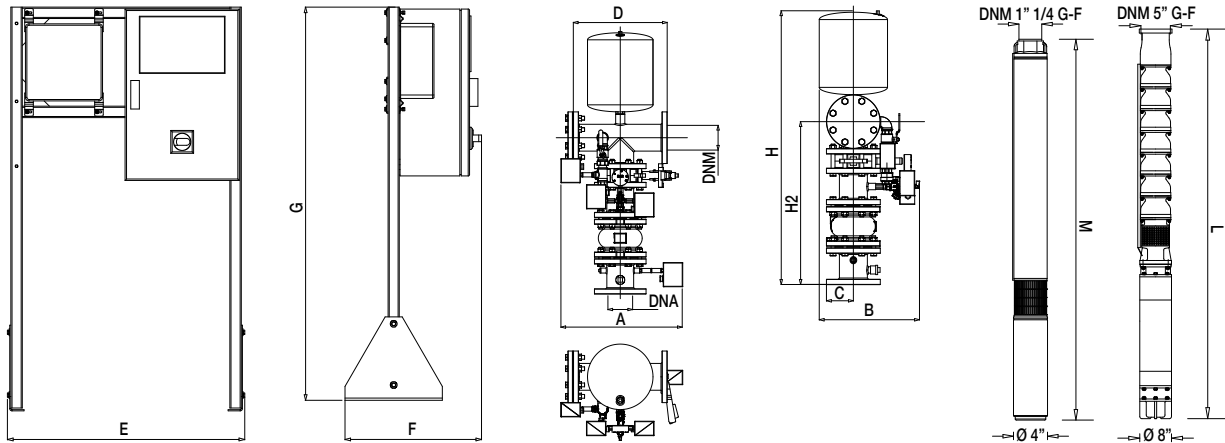

MODEL	A	B	C	D	E	F	G	H	H2	L	M	DNA	DNM	Ø P	Ø P1	PACKING (b x p x h)	WEIGH Kg
1 SS8 A3 T 400/50 EN 12845	500	380	110	400	830	490	1415	785	665	1917	-	100	100	141	213	1000 x 1400 x 2200	244
1 SS8 A4 T 400/50 EN 12845	500	380	110	400	830	490	1415	785	665	2203	-	100	100	141	213	1000 x 1400 x 2200	252
1 SS8 A5 T 400/50 EN 12845	500	380	110	400	830	490	1415	785	665	2489	-	100	100	141	213	1000 x 1400 x 2200	260
1 SS8 A3 T 400/50 EN 12845 - S4C 19 T	520	410	110	400	830	490	1415	1120	665	1917	1086	100	100	141	213	1000 x 1400 x 2200	264
1 SS8 A4 T 400/50 EN 12845 - S4C 19 T	520	410	110	400	830	490	1415	1120	665	2203	1086	100	100	141	213	1000 x 1400 x 2200	272
1 SS8 A5 T 400/50 EN 12845 - S4C 25 T	520	410	110	400	830	490	1415	1120	665	2489	1343	100	100	141	213	1000 x 1400 x 2200	290

SS8 SETS - UNI EN 12845 FIRE-FIGHTING SETS

Pumped liquid temperature range: from 0°C to +40°C - Maximum ambient temperature: from 4°C to +40 °C - Maximum flow rate: 160 m³/h

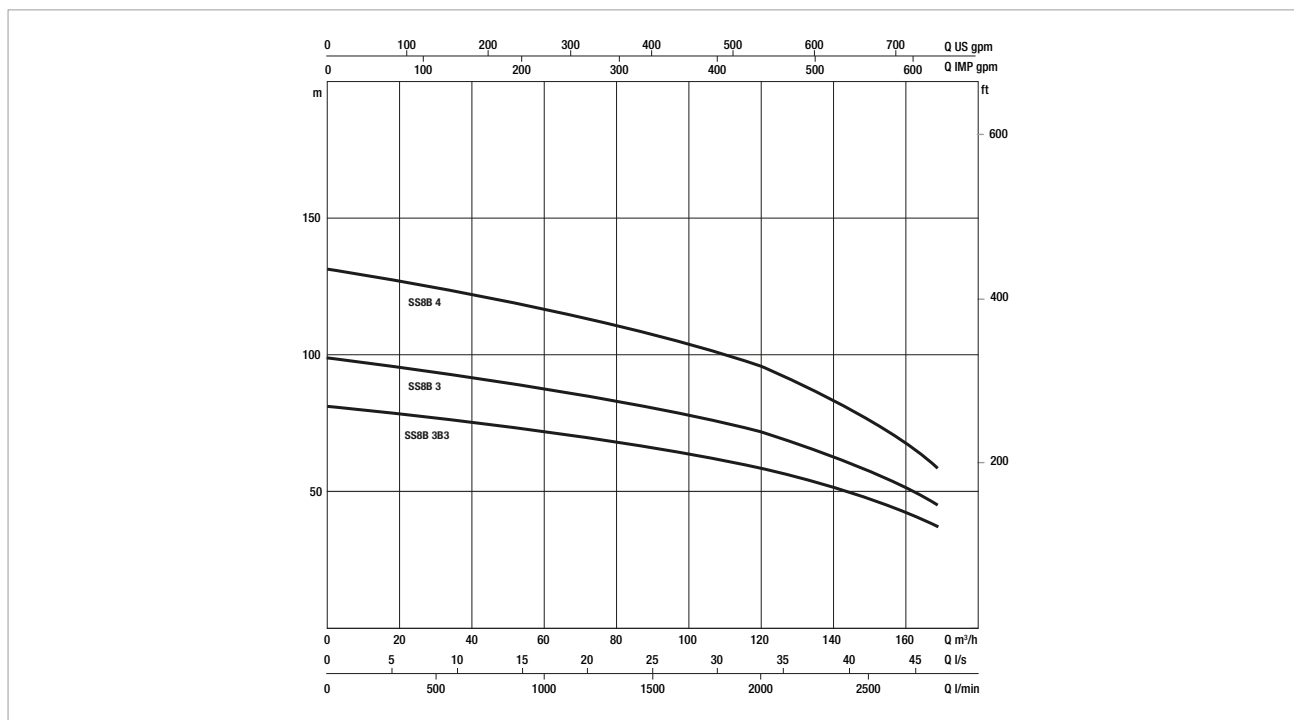

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

SETS WITH 1 SS8B SUBMERGED PUMP

MODEL	POWER INPUT 50 Hz	P2 NOMINAL		In (A)	CONTROL PANEL MODEL	MAX FLOW RATE m³/h	MAX OBTAINABLE PRESSURE	STANDARD PRESSURE (bar)
		kW	Hp					
1 SS8 B3B.3 T 400/50 EN 12845	3 x 400 V 50 Hz	30	40	61,5	EGES 30T SD 400/50-60	160	7,7	6
1 SS8 B3 T 400/50 EN 12845	3 x 400 V 50 Hz	37	50	79,3	EGES 37T SD 400/50-60	160	10,3	8
1 SS8 B4 T 400/50 EN 12845	3 x 400 V 50 Hz	45	60	92	EGES 45T SD 400/50-60	160	13,1	10,5


SETS WITH 1 SS8B SUBMERGED PUMP + JOCKEY PUMP

MODEL	POWER INPUT 50 Hz	P2 NOMINAL		In (A)	CONTROL PANEL MODEL	MAX FLOW RATE m³/h	MAX OBTAINABLE PRESSURE	STANDARD PRESSURE (bar)
		kW	Hp					
1 SS8 B3B.3 T 400/50 EN 12845 - S4C 19 T	3 x 400 V 50 Hz	30	40	61,5	EGES 30T SD 400/50-60	160	7,7	6
	3 x 400 V 50-60 Hz*	1,1*	1,5*	3,4*	JFF 3 T*	4,2*	10,4*	8,0*
1 SS8 B3 T 400/50 EN 12845 - S4C 25 T	3 x 400 V 50 Hz	37	50	79,3	EGES 37T SD 400/50-60	160	10,3	8
	3 x 400 V 50-60 Hz*	1,5*	2,0*	4,4*	JFF 3 T*	4,2*	13,7*	11,0*
1 SS8 B4 T 400/50 EN 12845 - S4C 25 T	3 x 400 V 50 Hz	45	60	92	EGES 45T SD 400/50-60	160	13,1	10,5
	3 x 400 V 50-60 Hz*	1,5*	2,0*	4,4*	JFF 3 T*	4,2*	13,7*	11,0*


* Jockey pump

SS8 SETS - UNI EN 12845 FIRE-FIGHTING SETS

SETS WITH 1 SUBMERGED PUMP

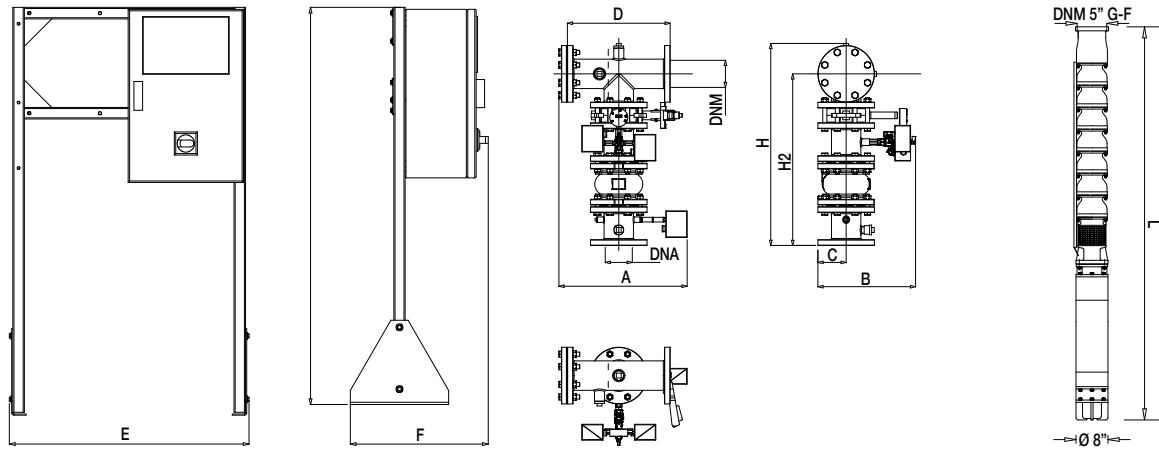


SETS WITH 1 SUBMERGED PUMP + JOCKEY PUMP

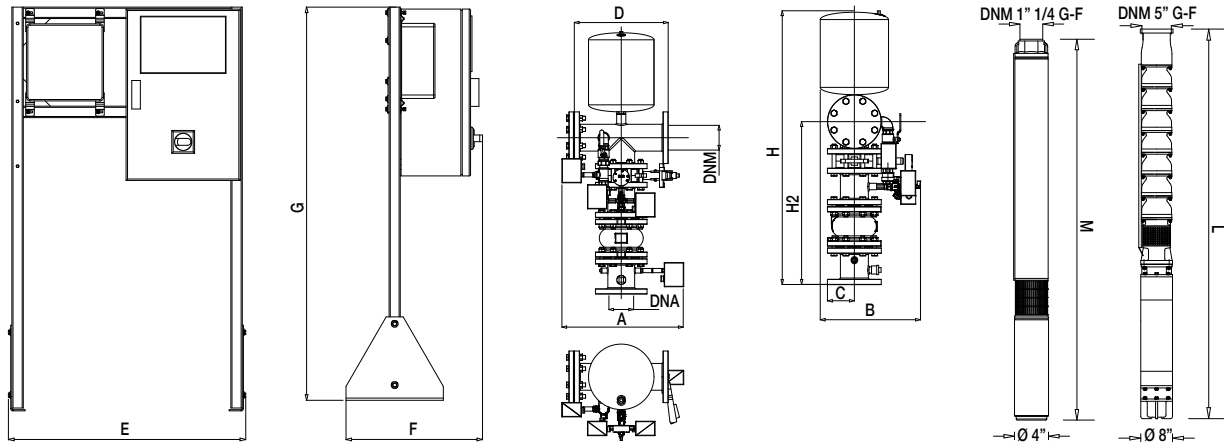

MODEL	A	B	C	D	E	F	G	H	H2	L	M	DNA	DNM	Ø P	Ø P1	PACKING (b x p x h)	WEIGHT Kg
1 SS8 B3B.3 T 400/50 EN 12845	500	380	110	400	830	490	1415	785	665	2047	-	100	100	141	213	1000 x 1400 x 2200	380
1 SS8 B3 T 400/50 EN 12845	500	380	110	400	830	490	1415	785	665	2177	-	100	100	141	213	1000 x 1400 x 2200	390
1 SS8 B4 T 400/50 EN 12845	500	380	110	400	830	490	1415	785	665	2423	-	100	100	141	213	1000 x 1400 x 2200	400
1 SS8 B3B.3 T 400/50 EN 12845 - S4C 19 T	520	410	110	400	830	490	1415	1120	665	2047	1086	100	100	141	213	1000 x 1400 x 2200	400
1 SS8 B3 T 400/50 EN 12845 - S4C 25 T	520	410	110	400	830	490	1415	1120	665	2177	1343	100	100	141	213	1000 x 1400 x 2200	410
1 SS8 B4 T 400/50 EN 12845 - S4C 25 T	520	410	110	400	830	490	1415	1120	665	2423	1343	100	100	141	213	1000 x 1400 x 2200	420

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL MOTOR WITH VERTICAL AXIS PUMPS

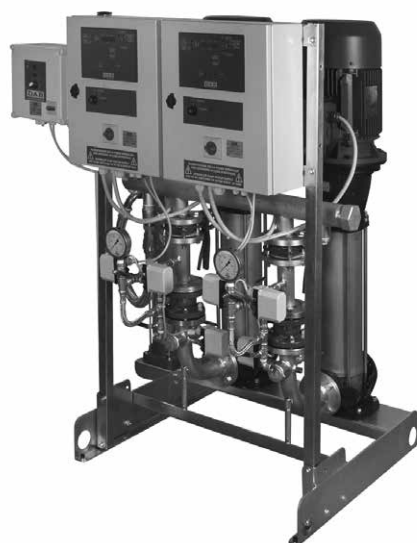

TECHNICAL DATA

Operating range: from 4 to 29 m³/h

Pumped liquid: clean, free of solids and abrasives, non-viscous, non-aggressive, non-crystallised and chemically neutral, with properties similar to water

Pumped liquid temperature range: from -15 to 70 °C

Maximum ambient temperature: + 40°C

Maximum operating pressure: 14 bar (1400 kPa) PN16

TECHNICAL DATA

.Fire-fighting pump sets in accordance with UNI EN 12845 European Standard
Fixed fire-fighting installations - Automatic sprinkler systems

NOTES ON UNI EN 12845

UNI EN 12845, the Italian version of European Standard EN 12845, sets the design, installation and maintenance criteria for sprinkler systems. It replaces the earlier Italian standards UNI 9489 and UNI 9490.

An automatic sprinkler system is designed to detect the presence of fire and extinguish it during the initial stages, or to keep flames under control until they can be extinguished fully using other means.

The classic sprinkler system is composed of: a water source, a fire-fighting pump unit, a series of control valves, and a sprinkler circuit.

MULTI-PUMP SET COMPOSITION

The pumps of UNI EN 12845 sets will have the same characteristics; in addition:

- if TWO pumps are installed, each pump must deliver the total system load (100 %),
- if THREE pumps are installed, each pump must deliver 50 % of the load required by the design.

"In applications in which more than one pump is installed with higher or duplicated feed, only one of the pumps will be electrically driven (section 10.2 of the standard)".

In case of single water supply, there are no limitations on the number of electric pumps that can be installed.

UNI EN 12845 FIRE-FIGHTING PUMP SET OPERATION

In normal conditions, (zero water request), the system is under static pressure.

The first time there is a water request, the compensation pump activates (if present), reinstating the system pressure.

In case of significant water request (activation of the fire-fighting sprinklers), the pressure drops until the two pressure switches connected in series activate the main pump.

The two pressure switches must be calibrated to start the pumps at the following pressure values:

ONE-PUMP SETS	P = 0,8 X MAX PUMP PRESSURE	
TWO-PUMP SETS	PUMP 1: P1 = 0,8 X MAX PRESSURE	PUMP 2: P2 = 0,6 X MAX PRESSURE

E.g.: Max pump pressure 10 bar - pump 1 starts at 8 bar, pump 2 starts at 6 bar

The main pump continues to operate until it is manually stopped using the STOP pushbutton on the electric control panel.

In case of hydrant systems refer to UNI 10779 - July 07. In addition to prescribing feed pumps in compliance with UNI EN 12845, UNI 10779 allows automatic stopping of the pumps 20 minutes after the closing of the hydrants, in case of non permanently supervised operation. DAB pump sets are suitable for sprinkler systems with manual stop, and for hydrant systems with automatic stop.

PUMPS - UNI EN 12845

UNI EN 12845 (10.1) standard prescribes "Horizontal or vertical pumps with coinciding maximum and zero flow rate head. They can be driven by electric motor or Diesel engine. For HHP and HHS pre-calculated systems, they shall be able to supply 140 % of the flow rate at 70 % of the head of the operating point (100 %).

PRESSURE COMPENSATION PUMP - "JOCKEY"

The compensation pump (jockey) is a pump that intervenes when the collection of a small amount of water is required. This avoids pointless starts of the main pumps in case of small system leaks. DAB fire-fighting sets are available with and without jockey pump.


WARNING - NOTE

In case of higher or duplicated feed, only one electric pump can be used. According to the UNI EN 12825 (10.2) standard, "In applications in which more than one pump is installed with higher or duplicated feed, only one of the pumps will be electrically driven".


1/2 NKV

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL MOTOR WITH VERTICAL AXIS PUMPS

N.	COMPONENTS
1	Independent control panel for each main pump
2	Jockey pump control panel
3	Jockey pump
4	Jockey pump pressure switch
5	Lockable shut-off valve
6	Start pressure switch circuit
7	Ground anchoring holes
8	2" connection for priming tank
9	1/4" connection for water recirculation
10	Running pump pressure switch
11	Check valve test system
12	Independent suctions
13	Check valve on service pump
14	1" connection for pump room sprinkler flow switch
15	Unique delivery manifold
16	Jockey pump expansion vessel

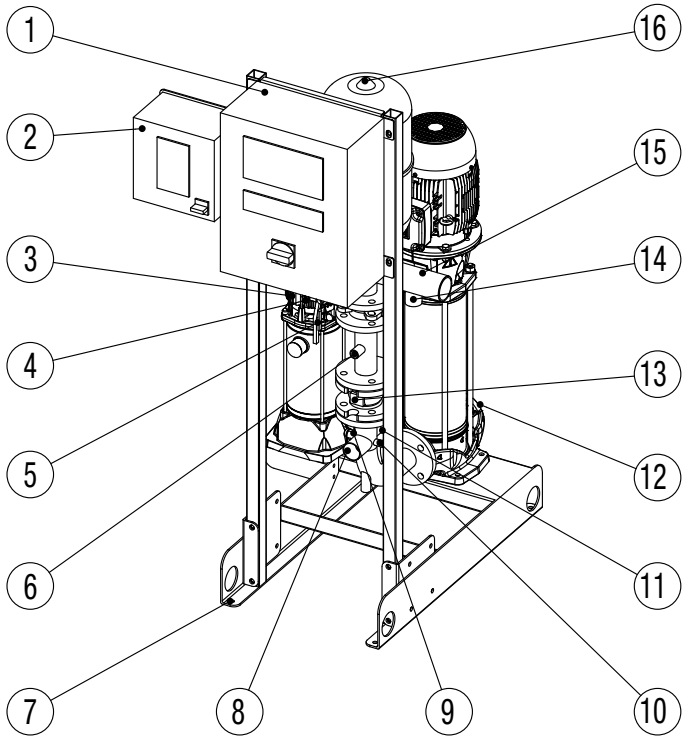

N.	COMPONENTS
1	Independent control panel for each main pump
2	Jockey pump control panel
3	Jockey pump
4	Jockey pump pressure switch
5	Lockable shut-off valve
6	Start pressure switch circuit
7	Ground anchoring holes
8	2" connection for priming tank
9	1/4" connection for water recirculation
10	Running pump pressure switch
11	Check valve test system
12	Independent suctions
13	Check valve on service pump
14	1" connection for pump room sprinkler flow switch
15	Unique delivery manifold
16	Jockey pump expansion vessel

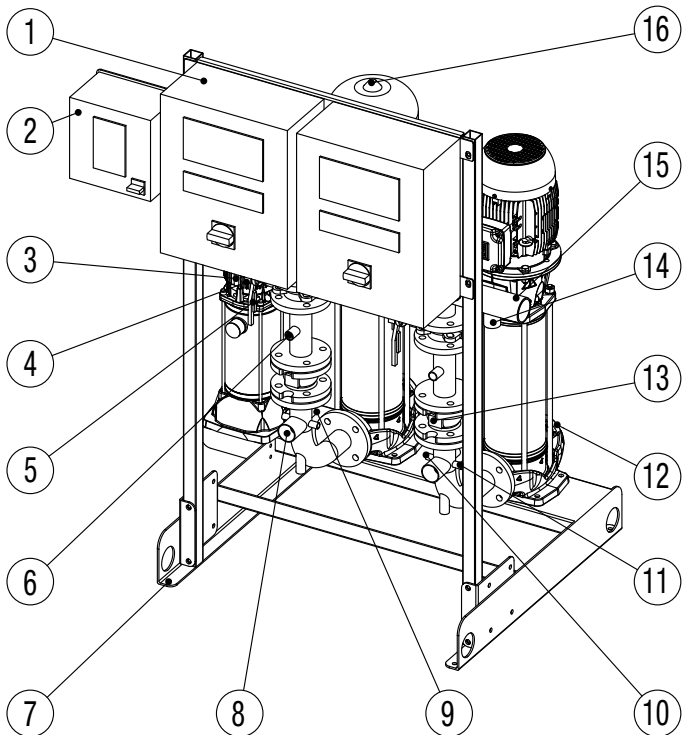

ELECTRIC PUMP CONTROL PANEL

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL MOTOR WITH VERTICAL AXIS PUMPS



TECHNICAL DATA

Nominal power input voltage: 400 V +/- 5%

Phases: 3

Frequency: 50-60 Hz

Number of pumps that can be connected: 1

Maximum nominal power of use:
from 3 to 110 kW (depending on model)

Maximum nominal current of use: from 10 Amp to 250 Amp

Ambient temperature operation limits: from +4 °C to +40 °C

Relative humidity (without condensation):

50% at 40 °C MAX (90% a 20 °C)

Max. altitude: 3000 m (a.s.l.)

Protection class: IP55

Control panel construction:

According to EN60204, EN 60439-1, and UNI EN 12845/10779

COMPONENTS

The control and protection panel includes the following components

INTERIOR OF CABINET

Connector for the powering of a GSM Modem (230 V, protected by fuse).

Motor protection fuses (aM type); current surge relay-motor protectors are not permitted by the standard.

Auxiliary circuit protection fuses (Gg type).

Direct pump starters (up to 15 kW).

Star/triangle starters (18,5 kW and over).

24 V auxiliary circuit transformers.

Alarm relay with terminal box for remote status control (as required by the UNI EN 12845 standard).

System start-up input connection terminal box.

ON FRONT PANEL

Electric pump control unit with:

Multifunction instrument with display (voltmeter, ammeter, cosfi metre, wattmeter, alarms and status).

Start and stop pushbuttons.

Status and alarm notification lamps.

Alarm/notification lamp test pushbutton.

0 - 1 selector (0 = automatic disabled; 1 = automatic on), key removable only for position one (AUTOMATIC ON).

REMOTELY CONTROLLED ALARMS:

Voltage present.

Phase sequence.

Pump start request from the pressure switches.

Pump start request from priming tank.

Pump in operation.

Start failed.

The above alarms can be remotely controlled in the following ways:

With relay wiring to the alarm monitoring control panel (optional).

With RS-485 wiring to the alarm monitoring control panel (optional).


With GSM Modem inside the cabinet, for forwarding status and/or alarm signals (optional).

ELECTRIC PUMP CONTROL PANEL

UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL MOTOR WITH VERTICAL AXIS PUMPS

ELECTRIC PUMP CONTROL UNIT

The A1 electronic control unit supplied with the control panel offers the following features: automatic start from the pressure switches or the priming float switch, manual start, automatic monitoring of pump set faults and incorrect or unavailable power input voltage.

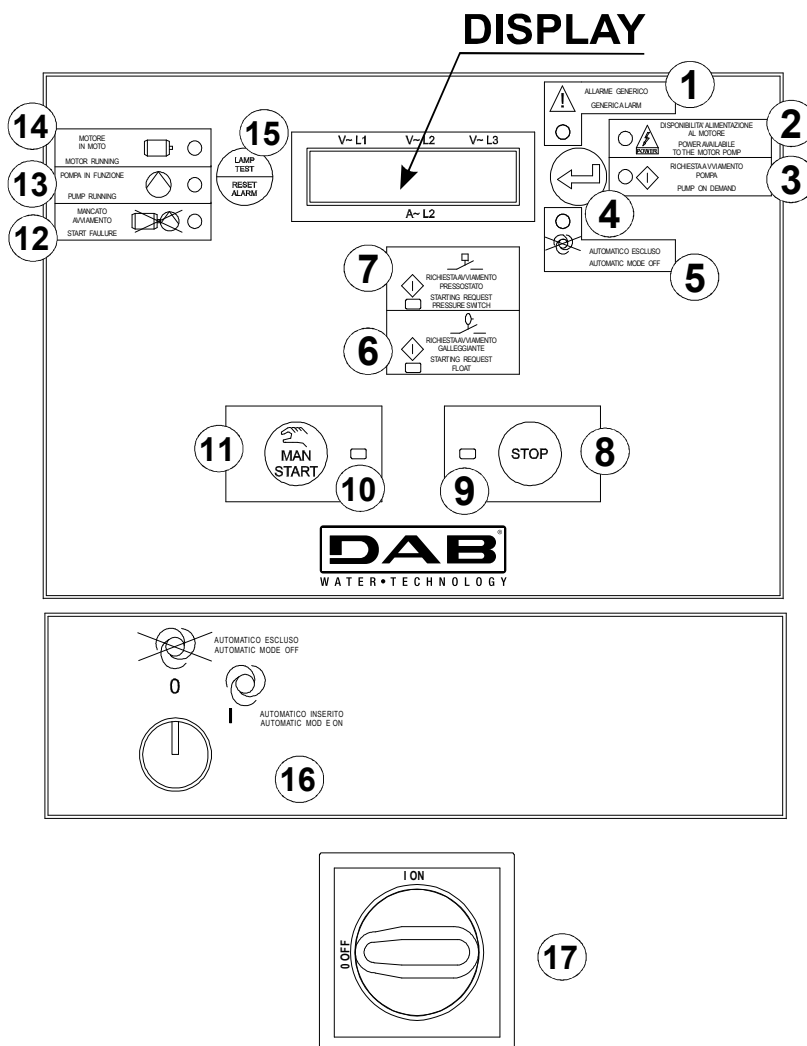

**ALIMENTAZIONE DELLA POMPA SPRINKLER
 NON SPEGNERE IN CASO DI INCENDIO**


**SPRINKLER PUMP MOTOR SUPPLY
 NOT TO BE SWITCHED OF IN THE EVENT OF FIRE**

REF.	FUNCTION
1	LAMP - Generic alarm
2	LAMP - Power input to the motor detected
3	LAMP - Pump START request
4	Press to display the instruments
5	LAMP - Automatic start disabled
6	LAMP - START request from the priming tank float switch
7	LAMP - START request (call) from the pressure switches
8	MANUAL STOP pushbutton
9	LAMP - MANUAL STOP with STOP pushbutton notification



REF.	FUNCTION
10	LAMP - MANUAL START with MAN START pushbutton notification
11	MANUAL START pushbutton
12	LAMP - Start failed
13	LAMP - ELECTRIC PUMP RUNNING with motor running; detected by the electric pump running pressure switch
14	LAMP - MOTOR RUNNING; controlled by the ammeter detection
15	Reset lamp test pushbutton
16	Automatic mode disabling selector
17	Power input disconnection switch

UNI EN 12845 PRIMING TANK

One 500 l priming tank must be installed for each main pump, only in case of **positive suction feed**.

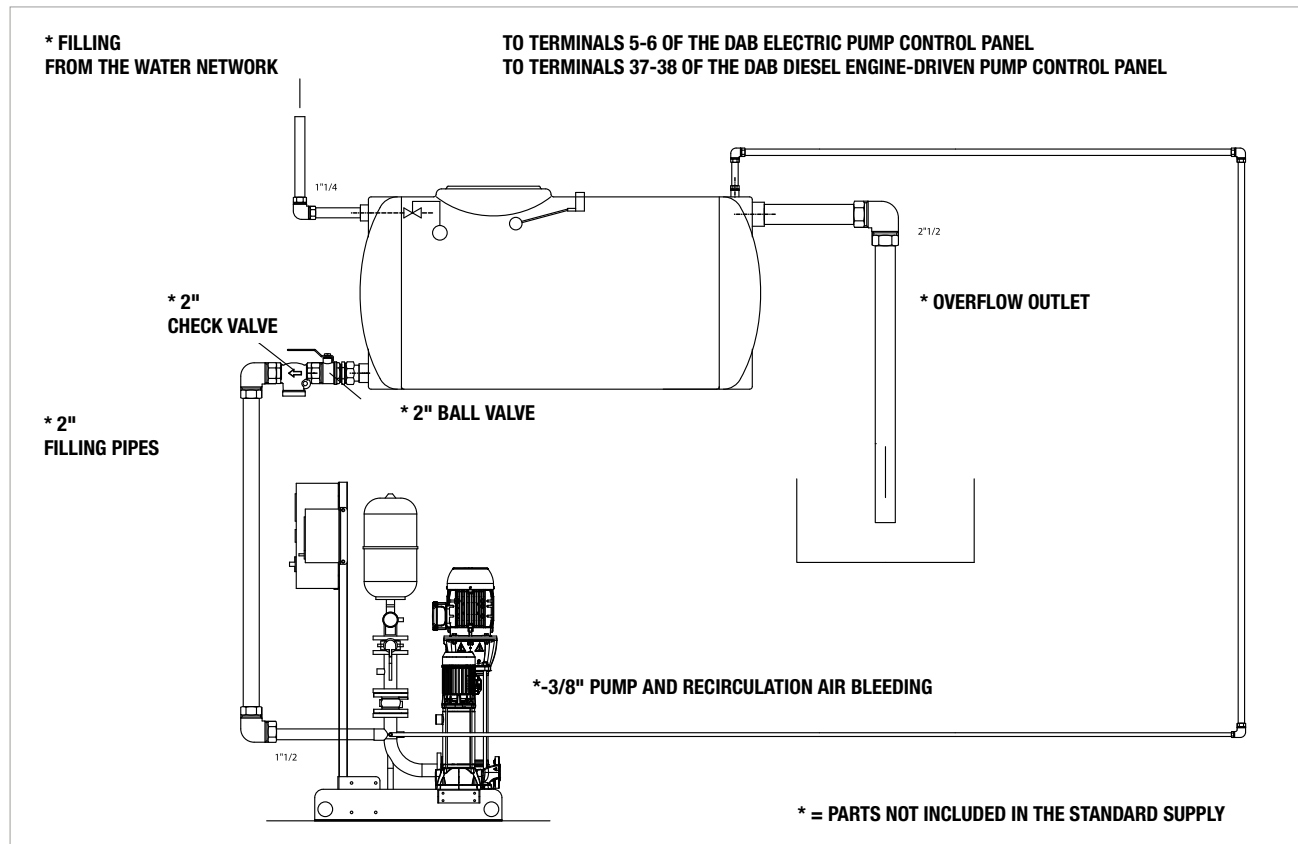

FLOW METER KIT

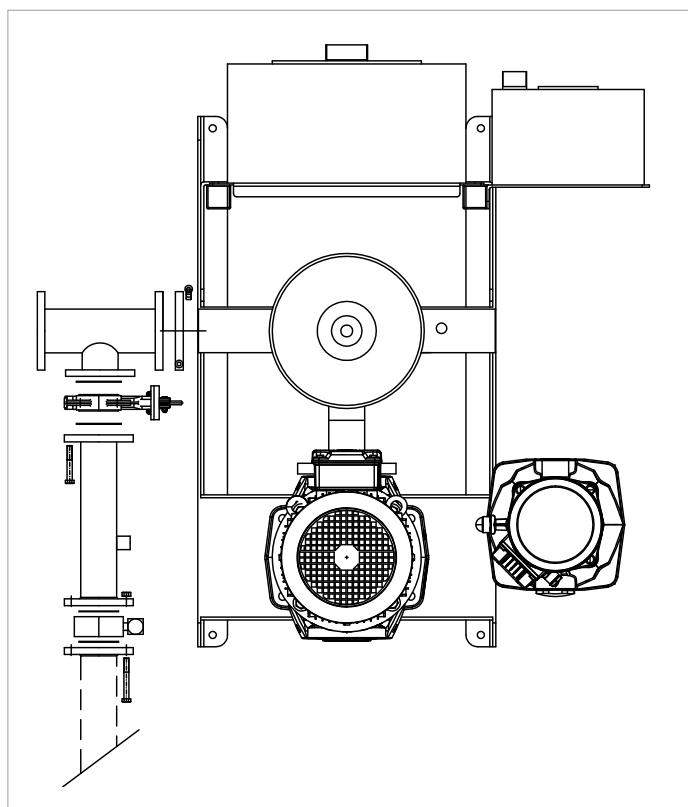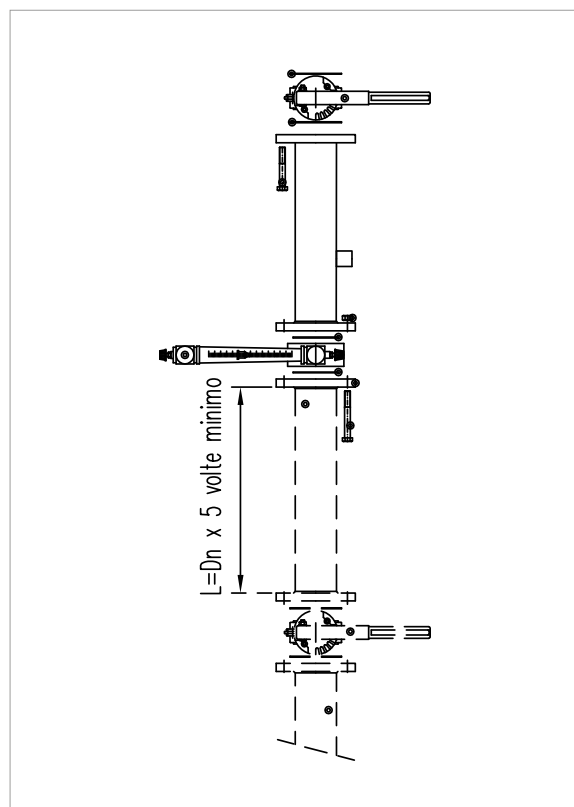


UNI EN 12845 FIRE FIGHTING PUMPS SETS WITH ELECTRICAL MOTOR WITH VERTICAL AXIS PUMPS

SUCTION KIT

The kit consists of a conical eccentric adaptor, screws and washers.

It is required in order to avoid air pockets at the suction, and to keep the water speed below 1,5 m/s, as required by section 10.6.2.3 of UNI EN 12845. No. 1 kit must be installed at the suction of each main pump.

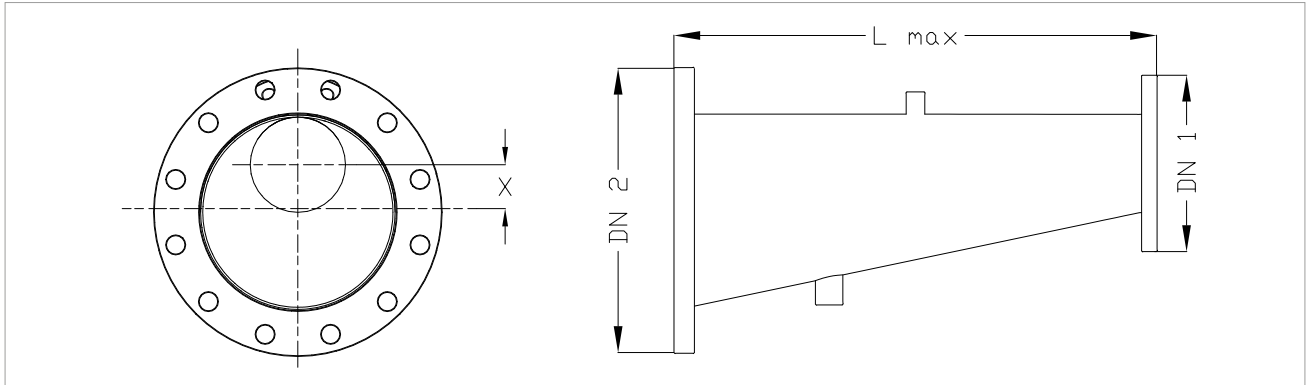

UNI EN 12845 ECCENTRIC SUCTION ADAPTORS


PUMP MODEL	ADAPTOR MODE	DN1 –PN 16 PUMP SIDE	DN2 – PN16 SYSTEM SIDE	L (mm)	X (mm)
NKV 10	KIT ASP.NKV10 EN12845 (DN65 - 19°)	DN 40	DN 65*	145	14
NKV 15 – NKV 20 KDN 32	KIT ASP.KDN32/NKV15-20 EN12845(DN80-19°)	DN 50	DN 80	200	14
KDN 40	KIT ASP.KDN40 EN12845 (DN100 - 19°)	DN 65	DN 100	235	19
KDN 50	KIT ASP.KDN50 EN12845 (DN125 - 19°)	DN 65	DN 125	320	32
KDN 65	KIT ASP.KDN65 EN12845 (DN150 - 19°)	DN 80	DN 150	380	40
KDN 80	KIT ASP.KDN80 EN12845 (DN200 - 19°)	DN 100	DN 200	570	52
KDN 100	KIT ASP.KDN100 EN12845 (DN250 - 19°)	DN 125	DN 250	685	67

*The standard requires DN 80 minimum for positive suction installations. In this case contact our sales network.

PERFORMANCE RANGE


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

GRAPHIC SELECTION TABLE

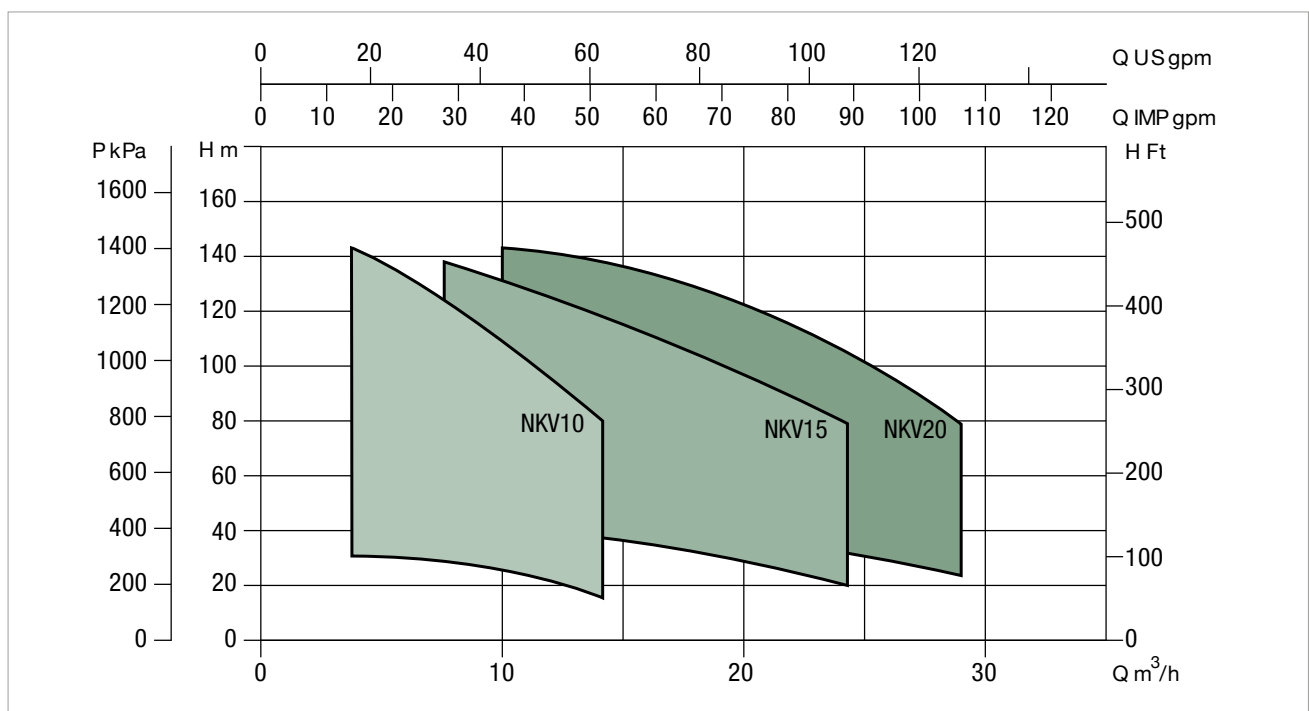

NKV 10 - UNI EN 12845 FIRE-FIGHTING PUMP SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C - Maximum flow rate: 13 m³/h

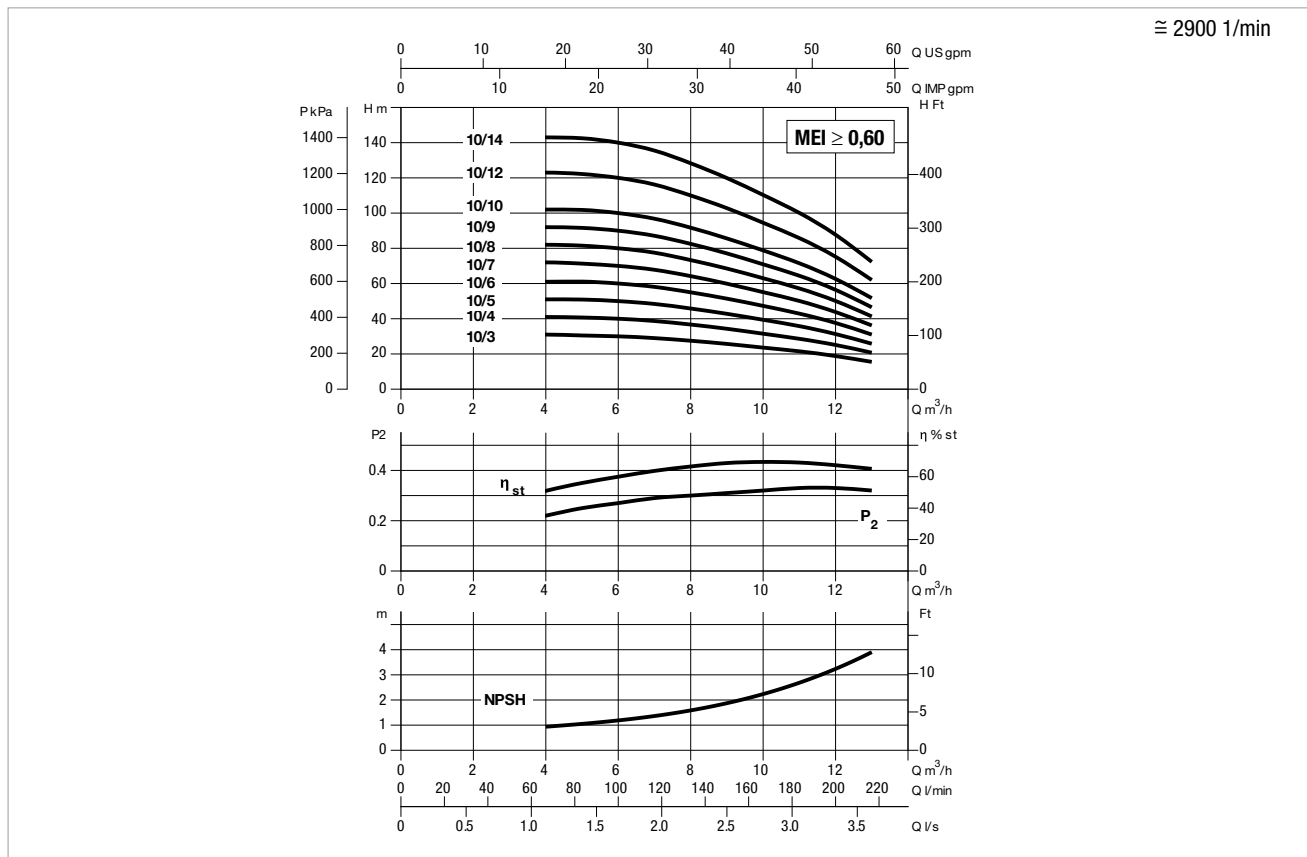


Performance curves and electric data referred to only one pump in operation.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.


MODEL	ELECTRICAL DATA			
	POWER INPUT 50 Hz	P2 NOMINAL		In A
		kW	HP	
NKV 10/3	3 x 400 V ~	1,1	1,5	2,4
NKV 10/4	3 x 400 V ~	1,5	2	3
NKV 10/5	3 x 400 V ~	1,5	2	3
NKV 10/6	3 x 400 V ~	2,2	3	4,6
NKV 10/7	3 x 400 V ~	2,2	3	4,6
NKV 10/8	3 x 400 V ~	3	4	5,6
NKV 10/9	3 x 400 V ~	3	4	5,6
NKV 10/10	3 x 400 V ~	4	5,5	8
NKV 10/12	3 x 400 V ~	4	5,5	8
NKV 10/15	3 x 400 V ~	5,5	7,5	10,2

NKV 10 - UNI EN 12845 FIRE-FIGHTING PUMP SETS

ELECTRIC PUMP SET 1

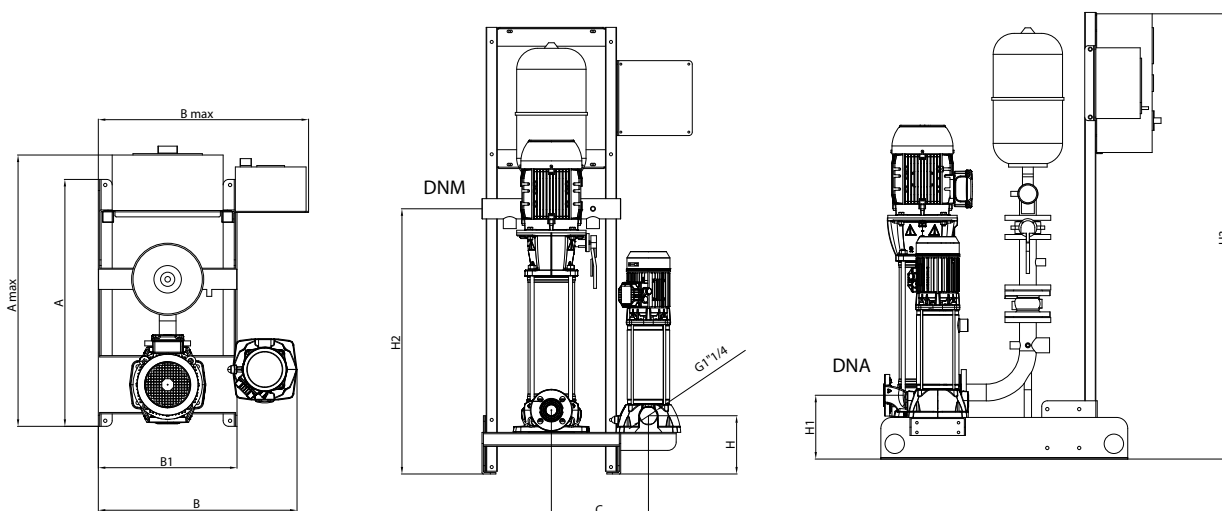

ELECTRIC PUMP SET 2

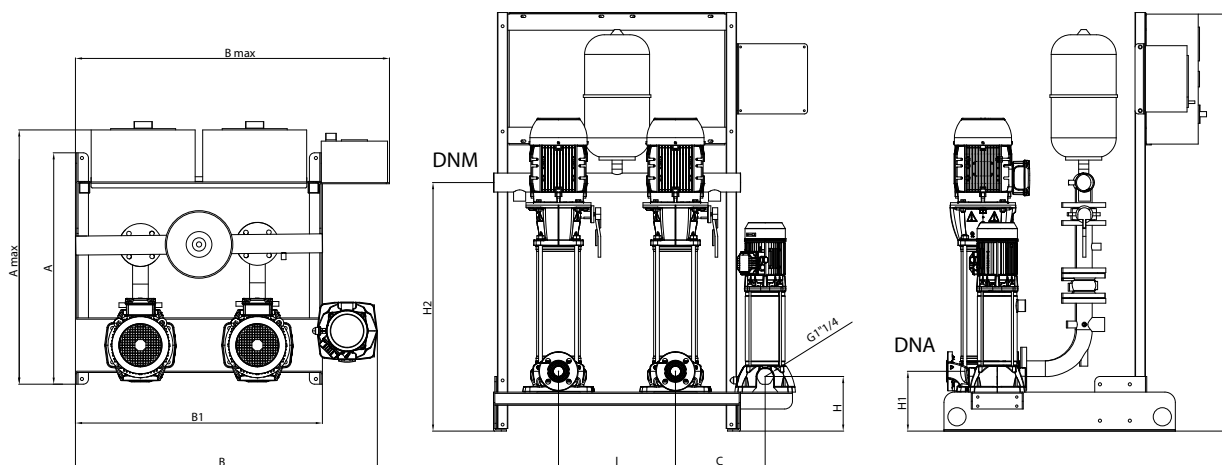


MODEL	A	A max	B	B1	B max	C	I	H	H1	H2	H3	DNA	DNM
1 NKV 10	1000	1100	700	500	745	350	-	210	230	960	1600	DN 40	2"
1 NKV 15	1000	1100	700	500	745	350	-	210	240	970	1600	DN 50	2" 1/2

NKV 15 - UNI EN 12845 FIRE-FIGHTING PUMP SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C - Maximum flow rate: 24 m³/h

≅ 2900 1/min

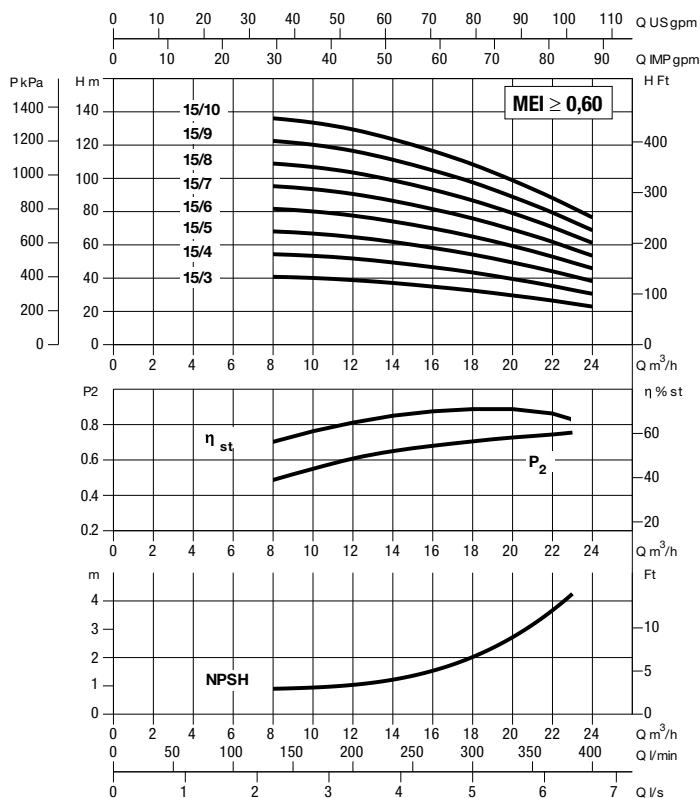


Performance curves and electric data referred to only one pump in operation.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.


MODEL	ELECTRICAL DATA			
	POWER INPUT 50 Hz	P2 NOMINAL		In A
		kW	HP	
NKV 15/3	3 x 400 V ~	3	4	5,6
NKV 15/4	3 x 400 V ~	4	5,5	8
NKV 15/5	3 x 400 V ~	4	5,5	8
NKV 15/6	3 x 400 V ~	5,5	7,5	10,2
NKV 15/7	3 x 400 V ~	5,5	7,5	10,2
NKV 15/8	3 x 400 V ~	7,5	10	14,4
NKV 15/9	3 x 400 V ~	7,5	10	14,4
NKV 15/10	3 x 400 V ~	11	15	19,7

NKV 15 - UNI EN 12845 FIRE-FIGHTING PUMP SETS

ELECTRIC PUMP SET 1

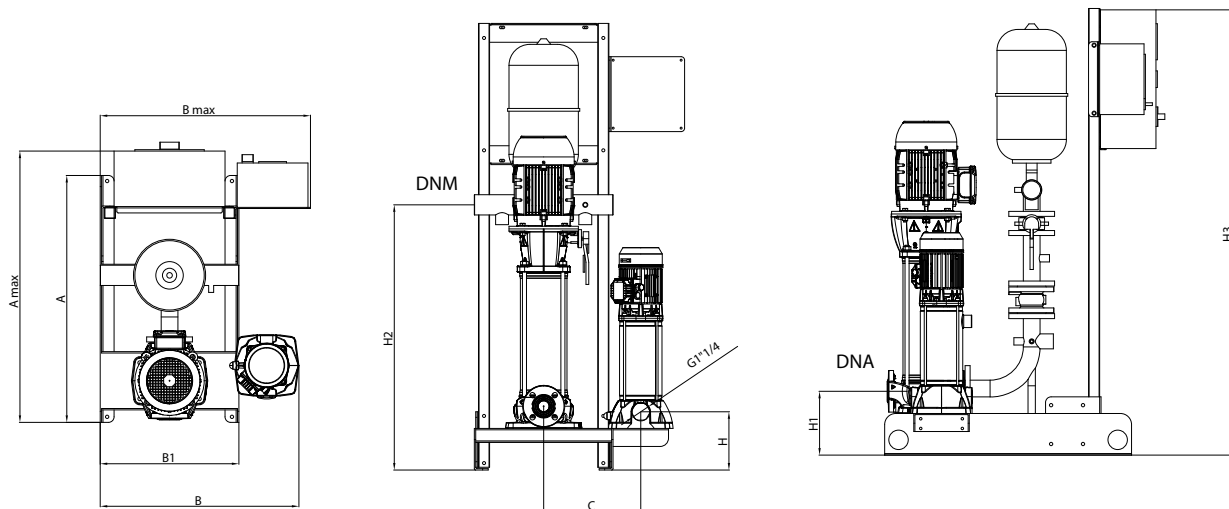

ELECTRIC PUMP SET 2

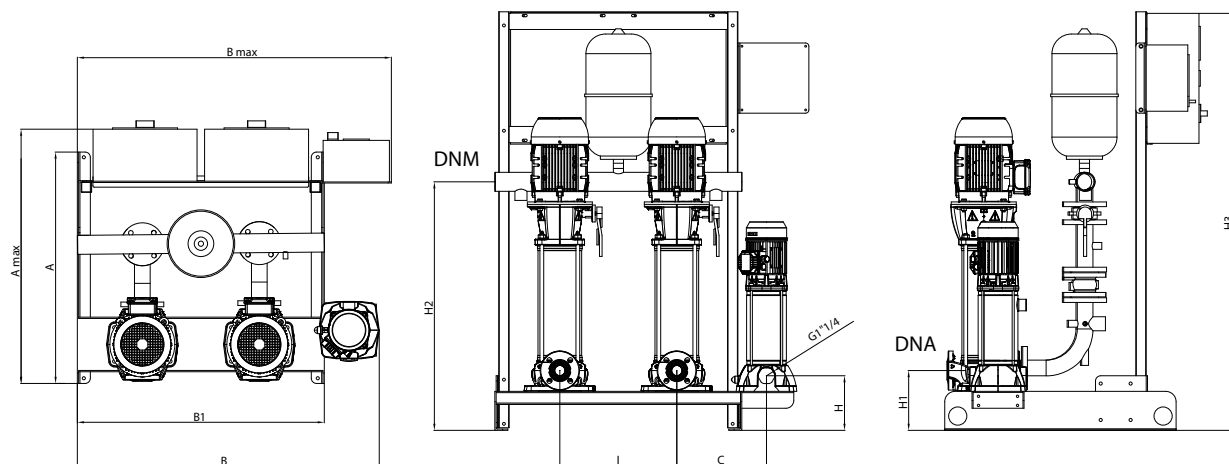


MODEL	A	A max	B	B1	B max	C	I	H	H1	H2	H3	DNA	DNM
1 NKV 15	1000	1100	700	500	745	350	-	210	240	970	1600	DN 50	2" 1/2
2 NKV 15	1000	1100	700	500	745	350	-	210	240	970	1600	DN 50	2" 1/2

NKV 20 - UNI EN 12845 FIRE-FIGHTING PUMP SETS

Pumped liquid temperature range: from -15 °C to +70 °C - Maximum ambient temperature: from +4 °C to +40 °C - Maximum flow rate: 29 m³/h

≅ 2900 1/min

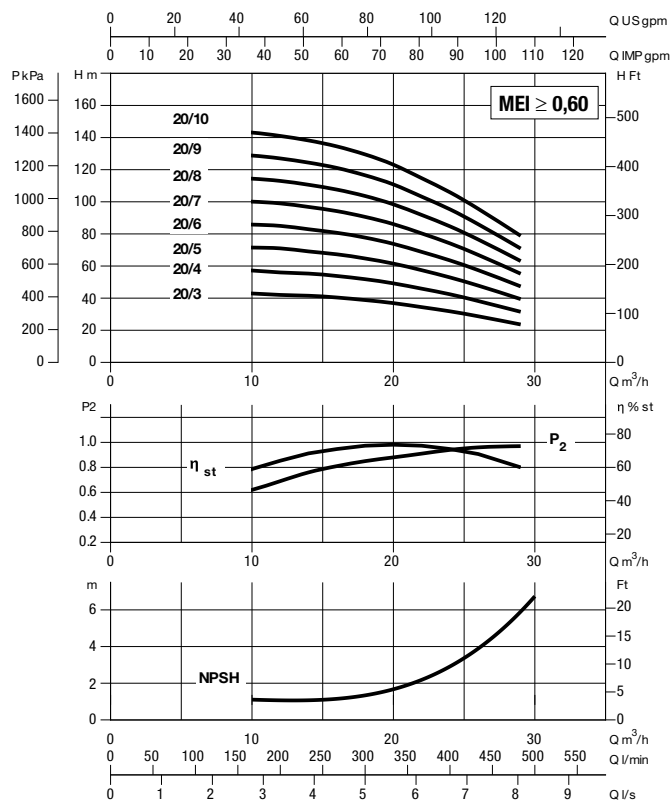


Performance curves and electric data referred to only one pump in operation.

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.


MODEL	ELECTRICAL DATA			
	POWER INPUT 50 Hz	P2 NOMINAL		In A
		kW	HP	
NKV 20/3	3 x 400 V ~	3	4	5,6
NKV 20/4	3 x 400 V ~	4	5,5	8
NKV 20/5	3 x 400 V ~	5,5	7,5	10,2
NKV 20/6	3 x 400 V ~	7,5	10	14,4
NKV 20/7	3 x 400 V ~	7,5	10	14,4
NKV 20/8	3 x 400 V ~	11	15	19,7
NKV 20/9	3 x 400 V ~	11	15	19,7
NKV 20/10	3 x 400 V ~	11	15	19,7

NKV 20 - UNI EN 12845 FIRE-FIGHTING PUMP SETS

ELECTRIC PUMP SET 1

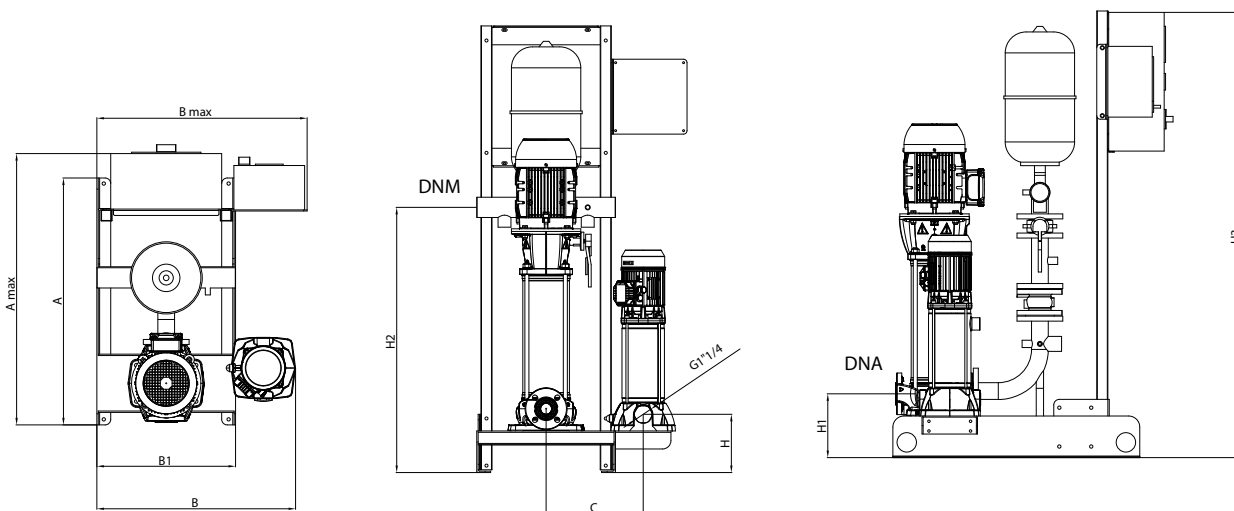

ELECTRIC PUMP SET 2

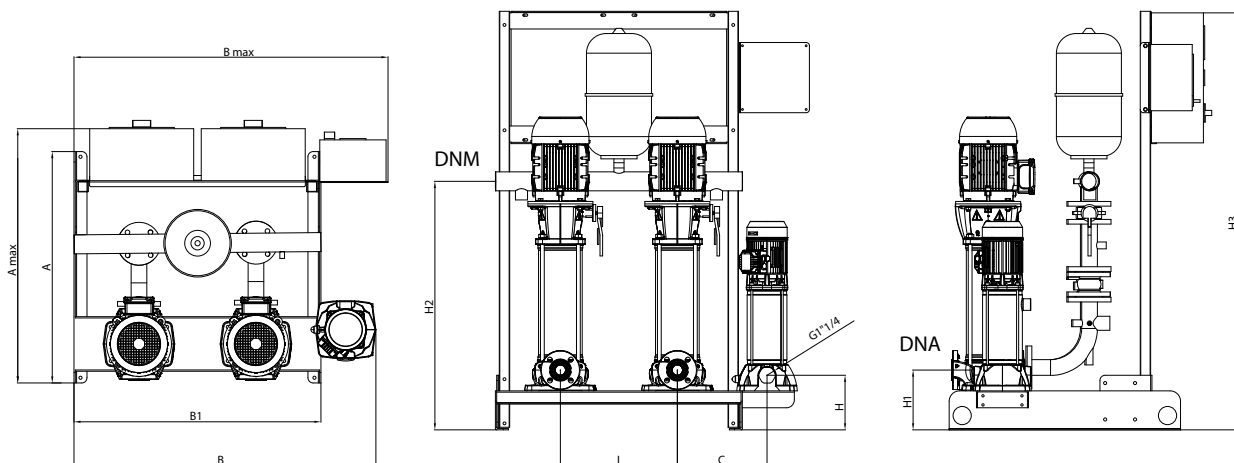



MODEL	A	A max	B	B1	B max	C	I	H	H1	H2	H3	DNA	DNM
1 NKV 20	1000	1100	750	500	745	350	450	210	240	970	1600	DN 50	2" 1/2
2 NKV 20	1000	1100	1100	950	1200	350	450	210	240	970	1600	DN 50	2" 1/2


ACCESSORIES

ACCESSORIES

UNI EN 12845 FIRE-FIGHTING SETS

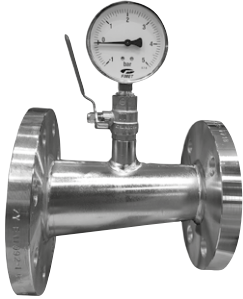
SUCTION KIT		DESCRIPTION	KDN	1/2 NKV	S4 - SS 6/7/8	KVT
 <p>PRESSURE GAUGE INCLUDED</p>	<p>The kit is composed of an eccentric cone with screws, nuts and seals. It maintains the water speed in suction below 1.5 m/s and prevents the formation of air pockets. The following is required: - 1 KIT for 1NKV units - 2 KITS for units 2NKV</p>	SUCTION KIT FOR NKV 10 EN 12845 (DN 65)		•		
		SUCTION KIT KDN 32 EN (DN 80)	•	•		
		SUCTION KIT KDN 40 EN (DN 100)	•			
		SUCTION KIT KDN 50 EN (DN 125)	•			
		SUCTION KIT KDN 65 EN (DN 150)	•			
		SUCTION KIT KDN 80 EN (DN 200)	•			
		SUCTION KIT KDN 80-250/80-315 EN (DN 250)	•			
		SUCTION KIT KDN 100 EN (DN 250)	•			
		SUCTION KIT KDN125 (DN300)	•			


JOINT MANIFOLD KIT		DESCRIPTION	KDN	1/2 NKV	S4 - SS 6/7/8	KVT
	<p>Only in the case of units comprising two modules (electric pump and/or Diesel pump) 1 coupling KIT is required.</p>	JOINT MANIFOLD KIT 2KDN 32 EN COMPACT	•			
		JOINT MANIFOLD KIT 2KDN 40 EN COMPACT	•			
		JOINT MANIFOLD KIT 2KDN 50 EN COMPACT	•			•
		JOINT MANIFOLD KIT 2KDN 65 EN COMPACT	•			
		JOINT MANIFOLD KIT 2KDN 80 EN COMPACT	•			•
		JOINT MANIFOLD KIT 2KDN 100 EN COMPACT	•			•
		JOINT MANIFOLD KIT 2KDN125 EN COMPACT	•			•

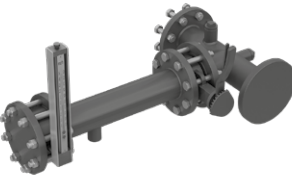
FLOW METER KIT		DESCRIPTION	KDN	1/2 NKV	S4 - SS 6/7/8	KVT
	<p>The measuring kit with flow meter must be installed on a branch on the delivery manifold of the set. • 1 MEASURING KIT is sufficient for both 1 and 2 1KDN and 1KVT sets (electric or diesel) • 1 flow meter KIT is sufficient for both 1NKV and 2NKV sets.</p>	1 S4 - EN 12845 - FLOW METER KIT			•	
		1 SS6 - EN 12845 - FLOW METER KIT			•	
		1 SS7 - 1 SS8 - EN 12845 - FLOW METER KIT			•	
		FLOW METER KIT - NKV 10 EN 12845		•		
		FLOW METER KIT KDN 100 EN		•		
		FLOW METER KIT KDN 32 EN COMPACT	•			
		FLOW METER KIT KDN 40 EN COMPACT	•			
		FLOW METER KIT KDN 50 EN COMPACT	•			•
		FLOW METER KIT KDN 65 EN COMPACT	•			
		FLOW METER KIT KDN 80 EN COMPACT	•			•
		FLOW METER KIT KDN 100 EN COMPACT	•			•


ACCESSORIES


UNI EN 12845 FIRE-FIGHTING SETS

FLOW METER		DESCRIPTION	KDN	1/2 NKV	S4 - SS 6/7/8	KVT
	Single flow meter (measuring device) to be installed on the delivery	FLUSSIMETRO DN 40 (3,5-25 M3/H) 1-2 NKV 10 -1S4		•	•	
		FLUSSIMETRO DN 50 (7-50 m³/h) KDN 32 - NKV 15-20	•	•		
		FLUSSIMETRO DN 65 (10-80 m³/h) KDN 40 - SS6	•		•	
		FLUSSIMETRO DN 80 (17,5-130 m³/h) KDN 50	•			•
		FLUSSIMETRO DN 100 (25-200 m³/h) KDN 65 - SS7 - SS8	•		•	
		FLUSSIMETRO DN 125 (40-300 m³/h) KDN 80	•			•
		FLUSSIMETRO DN 150 (45-350 m³/h) KDN 100	•			•
		FLUSSIMETRO DN 200 (800 m³/h) KDN 125	•			•

REMOTE ALARM SIGNAL PANEL		DESCRIPTION	KDN	1/2 NKV	S4 - SS 6/7/8	KVT
	Suitable for sets with 1 or 2 pumps	REMOTE ALARM SIGNAL PANEL CSR 1)	•	•	•	•


REMOTE ALARM SIGNAL PANEL		DESCRIPTION	KDN	1/2 NKV	S4 - SS 6/7/8	KVT
	Adatto per gruppi con 1 e/o 2 pompe	REMOTE ALARM SIGNAL PANEL CSR 1	•	•	•	•


GSM MODULE		DESCRIPTION	KDN	1/2 NKV	S4 - SS 6/7/8	KVT
	Delivery of alarm signal to mobile phone	GSM MODULE FOR CSR1	•	•	•	•


BUTTERFLY VALVE		DESCRIPTION	KDN	1/2 NKV	S4 - SS 6/7/8	KVT
	Required for pump maintenance, in case of flooded suction installations. The following is required: • N. 1 BUTTERFLY VALVE for units 1KDN (electric or diesel). • N.1 VALVE for units 1NKV and 2 VALVES for units 2NKV	BUTTERFLY VALVE DN 65		•		
		BUTTERFLY VALVE DN 80 - KDN 32 - NKV 15-20	•	•		
		BUTTERFLY VALVE DN 100 - KDN 40	•			
		BUTTERFLY VALVE DN 125 - KDN 50	•			
		BUTTERFLY VALVE DN 150 - KDN 65	•			
		BUTTERFLY VALVE DN 200 - KDN 80	•			
		BUTTERFLY VALVE DN 250 - KDN 100	•			
		BUTTERFLY VALVE DN 300 - KDN 125	•			


ACCESSORIES

UNI EN 12845 FIRE-FIGHTING SETS

FOOT VALVE WITH FILTER		DESCRIPTION	KDN	1/2 NKV	S4 - SS 6/7/8	KVT
 <p>These are required to maintain priming of the pump suction, in overhead installations. The following is required:</p> <ul style="list-style-type: none"> • 1 FOOT VALVE for each 1KDN set (electric or Diesel). • 1 VALVE for units 1NKV and 2 VALVES for units 2NKV 	DN 65 FOOT VALVE WITH FILTER		•			
	FOOT VALVE WITH FILTER DN 80	•	•			
	FOOT VALVE WITH FILTER DN 100	•				
	FOOT VALVE WITH FILTER DN 125	•				
	FOOT VALVE WITH FILTER DN 150	•				
	FOOT VALVE WITH FILTER DN 200	•				
	FOOT VALVE WITH FILTER DN 250 (1KDN 100 - 1KDN 80-250/80-315)	•				
FOOT VALVE WITH FILTER DN 300 (KDN 125)	•					


ANTI-VIBRATION COUPLING FOR SUCTION LINES		DESCRIPTION	KDN	1/2 NKV	S4 - SS 6/7/8	KVT
 <p>The antivibration coupling is utilised to reduce the amount of vibration transmitted to the system, this being especially important when the prime mover is a Diesel engine.</p> <ul style="list-style-type: none"> • 1 COUPLING is sufficient for 1 KDN sets (electric or Diesel) (Not compulsory according to UNI EN 12845) • 1 COUPLING is necessary for 1NKV units and 2 COUPLINGS for 2NKV unit 	ANTI-VIBRATION JOINT DN65 PN16		•			
	ANTI-VIBRATION JOINT DN80 PN16	•	•			
	ANTI-VIBRATION JOINT DN100 PN16	•				
	ANTI-VIBRATION JOINT DN125 PN16	•				
	ANTI-VIBRATION JOINT DN150 PN16	•				
	ANTI-VIBRATION JOINT DN200 PN16	•				
	ANTI-VIBRATION JOINT DN250 PN16	•				
ANTI-VIBRATION JOINT DN300 PN16 - KDN 125	•					

ANTIVIBRATION COUPLINGS FOR DISCHARGE MANIFOLDS		DESCRIPTION	KDN	1/2 NKV	S4 - SS 6/7/8	KVT
 <p>The antivibration coupling is utilised to reduce the amount of vibration transmitted to the system, this being especially important when the prime mover is a Diesel engine.</p> <ul style="list-style-type: none"> - 1 COUPLING is sufficient for 1 or 2 KDN sets (electric or Diesel) (Not compulsory according to UNI EN 12845) - 1 COUPLING is sufficient for 1 or 2 NKV sets (electric or Diesel) (Not compulsory according to UNI EN 12845) 	ANTI-VIBRATING JOINT 2" - KDN 32	•	•			
	ANTI-VIBRATING JOINT 2" 1/2 - KDN 40	•	•			
	ANTI-VIBRATING JOINT DN 80 - KDN 50	•	•		•	
	ANTI-VIBRATING JOINT DN 100 - KDN 65	•				
	ANTI-VIBRATING JOINT DN 125 - KDN 80	•			•	
	ANTI-VIBRATING JOINT DN 150 - KDN 100	•			•	
	ANTI-VIBRATING JOINT DN 200 - KDN 125	•				

PRIMING TANK		DESCRIPTION	KDN	1/2 NKV	S4 - SS 6/7/8	KVT
	N. 1 per pump	PRIMING TANK (500 LT.) EN 12845	•	•		

ACCESSORIES



UNI EN 12845 FIRE-FIGHTING SETS


LINE SHAFT	MODEL AND LENGTH*
 <p data-bbox="181 1370 316 1397">ONLY FOR 1KVT</p> <p data-bbox="370 1052 600 1227">The axial line is a flanged pipe treated with black cathaphoresis paint coating that connects the submersible pump to the control head, with the corresponding guide supports.</p>	3A20L LINESHAFT Ø142 L=500
	3A20L LINESHAFT Ø142 L=750
	3A20L LINESHAFT Ø142 L=1000
	3A20L LINESHAFT Ø142 L=1500
	3A20L LINESHAFT Ø142 L=2000
	3A20L LINESHAFT Ø142 L=2500
	3A20L LINESHAFT Ø142 L=3050
	3A24L LINESHAFT Ø142 L=500
	3A24L LINESHAFT Ø142 L=750
	3A24L LINESHAFT Ø142 L=1000
	3A24L LINESHAFT Ø142 L=1500
	3A24L LINESHAFT Ø142 L=2000
	3A24L LINESHAFT Ø142 L=2500
	3A24L LINESHAFT Ø142 L=3050
	5A24L LINESHAFT Ø191 L=500
	5A24L LINESHAFT Ø191 L=750
	5A24L LINESHAFT Ø191 L=1000
	5A24L LINESHAFT Ø191 L=1500
	5A24L LINESHAFT Ø191 L=2000
	5A24L LINESHAFT Ø191 L=2500
	5A24L LINESHAFT Ø191 L=3050
	5A27L LINESHAFT Ø191 L=500
	5A27L LINESHAFT Ø191 L=750
	5A27L LINESHAFT Ø191 L=1000
	5A27L LINESHAFT Ø191 L=1500
	5A27L LINESHAFT Ø191 L=2000
	5A27L LINESHAFT Ø191 L=2500
	5A27L LINESHAFT Ø191 L=3050
	6A30L LINESHAFT Ø240 L=500
	6A30L LINESHAFT Ø240 L=750
	6A30L LINESHAFT Ø240 L=1000
	6A30L LINESHAFT Ø240 L=1500
	6A30L LINESHAFT Ø240 L=2000
	6A30L LINESHAFT Ø240 L=2500
	6A30L LINESHAFT Ø240 L=3050
	3A20L LINESHAFT SPECIAL LENGTH TO ORDER ON REQUEST FROM 0,6 M UP TO 2,95 M
	3A24L LINESHAFT SPECIAL LENGTH TO ORDER ON REQUEST FROM 0,6 M UP TO 2,95 M
	5A24L LINESHAFT SPECIAL LENGTH TO ORDER ON REQUEST FROM 0,6 M UP TO 2,95 M
	5A27L LINESHAFT SPECIAL LENGTH TO ORDER ON REQUEST FROM 0,6 M UP TO 2,95 M
	6A30L LINESHAFT SPECIAL LENGTH TO ORDER ON REQUEST FROM 0,6 M UP TO 2,95 M


* L Length in mm (500 to 3050 mm)



ACCESSORIES

UNI EN 12845 FIRE-FIGHTING SETS

KIT PUMP SYSTEM		DESCRIPTION	KDN	1/2 NKV	S4 - SS 6/7/8	KVT
		PUMP SYSTEM JET 251 T EN 12845	•			•
	including 18 l expansion vessel, electric control panel, valves for the connection of the jockey pump to the main KDN pump.	PUMP SYSTEM DIVER 150 T EN 12845				•
		PUMP SYSTEM DIVER 200 T EN 12845				•


FOOT VALVE WITH STRAINER		DESCRIPTION	KDN	1/2 NKV	S4 - SS 6/7/8	KVT
	No. 1 for each pump	FOOT VALVE WITH STRAINER VR3				•
		FOOT VALVE WITH STRAINER VR6				•


ANTI-VORTEX DISPOSITIVE		DESCRIPTION	KDN	1/2 NKV	S4 - SS 6/7/8	KVT
	Vortex prevention plate, to be installed between the cork plug and the pump body, to maximise the actual capacity of the water reserves No. 1 for each pump	ANTI-VORTEX DISPOSITIVE FOR SU3 AND VR3				•
		ANTI-VORTEX DISPOSITIVE FOR SU6 AND VR6				•


GASOLINE HARVESTER TANK		DESCRIPTION	KDN	1/2 NKV	S4 - SS 6/7/8	KVT
	For 1KDN sets with diesel engines between 15 and 26 kW included. 15 to 26 kW engines	GASOLINE HARVESTER FOR 50 L TANK (ENG. UP TO 26 KW)	•			
	For 1KDN and 1KVT sets with diesel engines between 37 and 110 kW	GASOLINE HARVESTER FOR 125 L TANK (ENG. 37-103 KW)	•			•
	For 1KDN and 1KVT sets with diesel engines between 145 and 164 kW	GASOLINE HARVESTER 250LT TANK (ENG.145 - 164 KW)	•			•


ACCESSORIES

UNI EN 12845 FIRE-FIGHTING SETS

SPARE PART KIT FOR DIESEL ENGINE		DESCRIPTION	KDN	1/2 NKV	S4 - SS 6/7/8	KVT
 <p>Each kit is composed of: a) 2 sets of filter elements and relative seals for fuel; b) 2 sets of filter elements and relative seals for lubricant; c) 2 sets of belts d) 1 complete set of couplings, seals and hoses for the motor; e) 2 injector nozzles.</p>	SPARE PART KIT FOR DIESEL ENGINE 7.1-KW(15LD)	•			•	
	SPARE PART KIT FOR DIESEL ENGINE 11-KW (25LD)	•			•	
	SPARE PART KIT FOR DIESEL ENGINE 15-KW (12LD)	•			•	
	SPARE PART KIT FOR DIESEL ENGINE 19-KW (9LD)	•			•	
	SPARE PART KIT FOR DIESEL ENGINE 26-KW (11LD)	•			•	
	SPARE PART KIT FOR DIESEL ENGINE 37-53-KW (D703)	•			•	
	SPARE PART KIT FOR DIESEL ENGINE 73-KW (D754)	•			•	
	SPARE PART KIT FOR DIESEL ENGINE 110-KW (D756)	•			•	
	SPARE PART KIT FOR DIESEL ENGINE 164KW (N45 MN TF 40.10)	•			•	


DIESEL ENGINE WITH HEAT EXCHANGER		DESCRIPTION	KDN	1/2 NKV	S4 - SS 6/7/8	KVT
 <p>* Surcharge to be added to standard versions</p>	All fire-fighting sets with diesel engine driven pumps and powers starting from 37 kW are equipped as standard with radiator cooling systems. On request, water/water heat exchanger cooled diesel engines are also available, subject to a surcharge to be added to the list prices for diesel engine driven pumps with standard radiator cooling system*	HEAT EXCHANGER WATER/WATER FOR DIESEL ENGINE OF 37 KW	•			•
	HEAT EXCHANGER WATER/WATER FOR DIESEL ENGINE OF 53 KW	•			•	
	HEAT EXCHANGER WATER/WATER FOR DIESEL ENGINE OF 73.5 KW	•			•	
	HEAT EXCHANGER WATER/WATER FOR DIESEL ENGINE OF 110 KW	•			•	


KIT FLOW SWITCH		DESCRIPTION	KDN	1/2 NKV	S4 - SS 6/7/8	KVT
	Suitable for sets with 1 or 2 pumps	KIT FLOW SWITCH 1" EN 12845	•	•	•	•


RECYCLE FLOW INDICATOR		DESCRIPTION	KDN	1/2 NKV	S4 - SS 6/7/8	KVT
		RECYCLE FLOW INDICATOR 3/4"	•			•


ACCESSORIES


UNI EN 12845 FIRE-FIGHTING SETS


COOLING SLEEVE KIT		DESCRIPTION	KDN	1/2 NKV	S4 - SS 6/7/8	KVT
		KIT COOLING PIPE 4" L.400			•	
		KIT COOLING PIPE 4" L.525			•	
		KIT COOLING PIPE 4" L.885			•	
		COOLING SLEEVE KIT L. 725			•	
		COOLING SLEEVE KIT L. 960			•	
		COOLING SLEEVE KIT L. 1.220			•	
		COOLING SLEEVE KIT L. 1.490			•	

HORIZONTAL POSITIONING KIT		DESCRIPTION	KDN	1/2 NKV	S4 - SS 6/7/8	KVT
		HORIZONTAL POSITIONING KIT 4"			•	
		HORIZONTAL POSITIONING KIT 6"			•	

FILTER KIT		DESCRIPTION	KDN	1/2 NKV	S4 - SS 6/7/8	KVT
		FILTER KIT 4"			•	
		FILTER KIT 6"			•	

PILOT PUMP REPLACEMENT		DESCRIPTION	KDN	1/2 NKV	S4 - SS 6/7/8	KVT
	Replacement of the only pilot pump JET 251 T-PIL used in fire-fighting units	JET REPLACEMENT 251 T-PIL 230-400/50	•	•		•

PRESSURE SWITCH		DESCRIPTION
	Spare part of pressure switch used for fire-fighting units	PRESSURE SWITCH KPI36 2-12 BAR EN12845

MANOMETER AND MANOVUOTOMETER		DESCRIPTION
	Replacement pressure gauge and vacuum gauge used in fire-fighting units	MANOM.RAD.GLY.0-16BAR(SCALE0,5)D=63 1/4
		MANOEUVRING.RAD.-1+5 BAR D=80 1/2 „M

TECHNICAL APPENDIX

NOTES ON UNI EN 12845

UNI EN 12845, the Italian version of European Standard EN 12845, sets the design, installation and maintenance criteria for sprinkler systems. An automatic sprinkler system is designed to detect the presence of fire and extinguish it during the initial stages, or to keep flames under control until they can be extinguished fully using other means. The classic sprinkler system is composed of: a water source, a fire-fighting pump unit, a series of control valves, and a sprinkler circuit.

COMPOSITION OF THE PUMP SETS

The pumps of UNI EN 12845 sets will have the same characteristics; in addition:

- if TWO pumps are installed, each pump must deliver the total system load (100 %),
- if THREE pumps are installed, each pump must deliver 50 % of the load required by the design.

"In applications in which more than one pump is installed with higher or duplicated feed, only one of the pumps will be electrically driven (section 10.2 of the standard)".

This means that in applications with higher or duplicated feed, the sets will consist of:

- No. 1 electric or Diesel pump (100 %)
- No. 1 electric pump + No. 1 Diesel pump (100 % + 100 %)
- No. 1 electric pump + No. 2 Diesel pumps (50 % + 50 % + 50 %)
- No. 3 Diesel pumps (+ 50 % + 50 % + 50 %)

In case of single water supply, there are no limitations on the number of electric pumps that can be installed. DAB provides "modular" type sets, so that all the versions contemplated by the UNI EN 12845 standard

- OPERATION OF UNI EN 12845 FIRE-FIGHTING PUMP SETS - CAN BE COMPLETED.

In normal conditions, (zero water request), the system is under static pressure. The first time there is a water request, the compensation pump activates (if present), reinstating the system pressure. In case of significant water request (activation of the fire-fighting sprinklers) the pressure drops until two pressure switches connected in series (contact N.C. under pressure) activate the main pump (electric or Diesel). The two pressure switches must be calibrated to start the pumps at the following pressure values:

- **One pump sets --> pressure switches calibrated at 80 % of the maximum pressure**
- **Two pump sets --> pressure switches of pump one calibrated at 80 %, and pressure switches of pump two calibrated at 60 % of the maximum pressure.**

(E.g. Max pump pressure 10 bar - pump 1 starts at 8 bar, pump 2 starts at 6 bar).

Note: DAB modules are supplied individually, and therefore the calibration of the pressure switches in case of sets consisting of several pump must be performed on location.

The main pump continues to operate until it is manually stopped using the STOP pushbutton on the electric control panel. In case of hydrant systems refer to UNI 10779 - July 07.

In addition to prescribing feed pumps in compliance with UNI EN 12845, UNI 10779 allows automatic stopping of the pumps 20 minutes after the closing of the hydrants, in case of non permanently supervised operation. DAB sets are ready for both manual stop sprinkler systems and automatic stop hydrant systems (the factory settings are for sprinkler systems).

PUMPS - UNI EN 12845

The UNI EN 12845 (10.1) standard prescribes "Horizontal or (preferably) vertical pumps with coinciding maximum and zero flow rate head. They can be driven by electric motor or Diesel engine. For HHP and HHS pre-calculated systems, they shall be able to supply 140 % of the flow rate at 70 % of the head of the operating point (100 %). The transmission coupling between motor and pump must ensure that both can be removed independently, so that the internal parts of the pump may be removed without affecting the pipeline. Axial suction pumps will be of the "back pull-out" type.

In order to fully meet the above requirements, DAB uses standardised pumps with spacer coupling, both for the electric motor and the Diesel engine version.

PRESSURE COMPENSATION PUMP - "JOCKEY"

The compensation pump (jockey) is a pump that intervenes when the collection of a small amount of water is required. This avoids pointless starts of the main pumps in case of small system leaks. The DAB fire-fighting sets are available with or without JOCKEY.

MAINTENANCE AND REGULAR CHECKS

MAINTENANCE, INSPECTION, AND CHECKS

The UNI EN 12845 standard gives a lot of importance to the maintenance of the system, including the pump set. The system must always be in perfect efficient condition.

According to section 20.1.1 of the UNI EN 12845 standard, the user must follow a plan of inspections and checks, establish a test, support, and maintenance program, document and record the activities, keeping such documentation in an appropriate folder in the building. The user must ensure that the test, support, and maintenance program is followed under contract by the system installer, or **by a similarly qualified company**.

The installer shall provide to the user a system control and inspection procedure, paying particular attention to the operation of the system, and the manual pump emergency start procedures.

WEEKLY CHECK (to be performed at intervals not exceeding 7 days)

The following values must be checked and recorded:

- pressure at the pressure gauges
- water levels in the tanks - water reservoirs
- correct position of the shut-off valves

Perform an automatic pump start test (both for electric and Diesel pumps) following the procedure below:

- Open the manual test valve.
- Check that the pump starts, and record the start pressure.
- Close the manual test valve.

In case of Diesel engine, this must be left running for at least 5 minutes.

- Stop the pump using the STOP pushbutton.
- PROCEDURE FOR DIESEL ENGINE-DRIVEN PUMPS.

Immediately after the stop, the Diesel engine-driven pump must be restarted using the manual start pushbutton "OPERATE MANUAL START".

- Stop the pump using the STOP pushbutton.

The oil pressure and the water flow in engines with heat exchanger will be monitored during the test.

MONTHLY CHECK

Check the level and the specific gravity of the start-up battery acid using a densimeter. If the specific gravity of the acid is low, check the battery charger and, if necessary, change the batteries.

THREE-MONTHLY CHECK

(at intervals of no more than 13 weeks – 20.3.2)

Check any modifications in the system, change of the risk class, etc.

Check the sprinklers, pipelines, and pipeline supporting systems.

Start the pumps, and check pressure and flow rate.

Check the operation of any generator sets connected to the system.

Check the correct position of the shut-off valves.

SIX-MONTHLY CHECK

(at intervals of no more than 13 weeks – 20.3.3)

Check the dry alarm valves (in the system).

Check that the alarms in the local control room and/or Fire Department control room are working correctly.

YEARLY CHECK

(at intervals of no more than 12 months)

Check the operation of the feed pumps at full load and any start failures

THREE-YEARLY CHECK

Check the tanks for any external and INTERNAL corrosion and reapply any protective coating if necessary.

Check shut-off and check valves and replace as necessary.

TEN-YEARLY CHECK

After no more than 10 years clean all tanks and check the internal structure.

GENERAL SERVICE CONDITIONS

REPAIR AT AUTHORISED TECHNICAL SUPPORT CENTRES

In order to guarantee the technical support for its movable products, DAB takes advantage of a capillary network of authorised Technical Support Centres (TSC), the full list of which can be found below, and to which the product can be sent or taken for repair.

For products that cannot be removed from their installation positions, it is possible to ask the TSC to intervene on site. In any case, the intervention will need to be authorised in advanced by Customer Service.

TSCs are authorised to apply on behalf of DAB the terms of the warranty for defective products. However, the warranty is subjected to the compliance by the customer with the warranty terms, and to the technical analysis carried out by the TSC to confirm the defect. In order to take advantage of the warranty, the product must be accompanied by proof of purchase, and must not have been previously disassembled or tampered with.

If the intervention or repair of the product is outside the terms of the warranty, the cost for the service provided will be decided by the TSC.

ON-SITE FIRST START-UP TECHNICAL ACTIVITIES - REQUEST OF INTERVENTION

DAB guarantees on-site technical interventions for complex pumping systems, such as pressurization sets/variable speed systems, or fire-fighting pressurisation sets that after installation require to be put into service by a specialist technician capable to show how to operate the equipment correctly, and how to set the installation parameters.

On-site technical interventions are carried out by TSCs possessing specific and appropriate technical skills. The first start-up technical interventions may be purchased directly from DAB when purchasing the pressurisation set / variable speed system.

The purchase of the first start-up service gives the right, during the 24 months following the first start-up of the equipment, to free of charge on-site interventions, provided that these are within the terms of the warranty (see section 6 of the General Sales Conditions).

LIMITS OF THE INTERVENTION

Before the intervention takes place, make sure that everything has been set to enable it to be completed: complete installation of the set, hydraulic and electric connections, availability of electricity, availability of pumped liquid, oil for Diesel engines, pump/motor coupling alignment, etc...

The technical intervention is subjected to positive results of all the safety checks that the technician will carry out before the same.

During the intervention, personnel appointed by the customer must be present, capable of carrying out any necessary system sectioning and regulation activities that may be required for the completion of the same. In addition, the personnel in charge of the site shall be at the disposal of the technician for all the time required for the completion of the intervention.

Any waiting or stop times for any reasons that cannot be attributed to our technician, will be debited to the customer as labour costs.

Any equipment required for moving the equipment shall be made available and used by the customer.

FIRE-FIGHTING PUMP ROOMS

The Italian standard of reference for correct realisation of technical rooms intended for housing fire-fighting pump sets is the **UNI 11292** (August 2008). Here are some extracts of the standard.

LOCATION OF PUMP ROOMS

The rooms shall be above ground or underground, and separated, in adjoining positions, within the protected building.

- Access must be easy (also in case of system in operation), and well indicated.
- The doors of the rooms, made of non-combustible material, must be at least **2 m high, and 0,80 m wide**.
- The possibility of easily introducing /removing the main components must be guaranteed.

CHARACTERISTICS OF THE ROOMS

- The rooms must be naturally ventilated by permanent openings (of at least 0,1 m²)
- The internal walls must be a pale colour, preferably white.
- The minimum sizes must enable to carry out maintenance activities in safe conditions.
- The minimum height of the room must be 2,4 metres.
- The width of the working area around the pumping set must be at least **0,80 m on three side of each set**.

FUNCTIONAL FEATURES:

- The 200 lux lighting system must guarantee at least 25 lux for 60 minutes in case of black out.
 - The room must have a draining system for any water discharge.
 - Underground rooms must be connected to a sewer system with a flow rate capacity of at least 20 m³/h.
- If this is not possible, at least TWO draining pumps shall be required (one as a back-up to the other) with minimum flow rate not more than 5 % lower than the maximum flow rate of the set (and in any case not less than 10 m³/h).
- One of them must be connected to an emergency power input line with autonomy of 30 min. in case of black out.
 - Any fault of the draining pumps must be notified at a manned location.

OPERATIONS FOR THE DIESEL ENGINE-DRIVEN PUMP.

Although more reliable when compared with the electric pump (it also works in case of black out), the Diesel engine-driven pump needs specific measures to avoid excessive noise, vibration, contamination from discharge gases, overheating.

Below are some measures to implement to ensure maximum efficiency.

Diesel engine-driven pump discharge gases. Always channel any discharge gases to the outside of the pump room, using appropriate dedicate exhaust ducts connected to the silencing muffler supplied with the Diesel engine-driven pump.

The exhaust ducts must run at least 2,4 m above the plane of reference (UNI 11292), at a distance of at least 1,5 metres from doors, windows, etcetera (UNI 11292). In addition, they must be protected by weather conditions and fitted with a draining system for the drainage of any condensation.

In order to avoid exceeding the maximum back pressure value at the discharge (600 mm H₂O for air cooled engines, and 1000 mm H₂O for turbocharged – liquid cooled engines), compliance with the following is recommended:

- the exhaust ducts must not be longer than 10 metres,
- the cross section of the ducts must be at least equal to the outlet port of the muffler supplied.

For the calculation of the duct cross-section for lengths in excess of 10 metres, increase the section by 10 % for each 10 metres of duct. E.g. 50 mm duct L 20m S= (50 mm + 10 %) + 10 %: at least 55,5 mm.

Reduce as much as possible the number of bends (max. 6), and ensure that they have the widest possible radius.

It is essential to avoid contamination of the water reservoir in the event of fuel spills from the engine-driven pump fuel tank.

For this purpose, DAB can supply a fuel containment reservoir (OPTIONAL), to be installed under the engine-driven pump tank.

VENTILATION FOR DIESEL ENGINE-DRIVEN PUMPS

For optimum operation, it is necessary that the heat produced by the engine is dispersed outside the pump room. Sufficient combustion air flow must also be guaranteed. The natural circulation caused by the difference between the internal and the external temperature is normally not sufficient. The following is therefore necessary (UNI 11292 5.4.2):

- an air inlet vent, protected by grid, with a net surface at least twice the S surface of the cooling device (e.g. water radiator),
- an air outlet vent, protected by grid, with a net surface at least 1,5 times the S surface of the cooling device.

In case of engine with water/water heat exchanger, the S surface (m²) will be 0,002 x Engine Power (kW).

In this case, the S surface of the conduits / openings, must be at least 0,15 m².

A fan must also be installed, for the extraction of the air from the room, with operation guaranteed also in case of black out:

- with air cooled engines,
- with water/water heat exchanger engines*

(*if ventilation openings are not possible)

Fan capacity - air cooled engines

$Q \text{ (m}^3\text{/h)} = 100 \times \text{Engine Power (kW)}$

Fan capacity - heat exchanger engines

$Q \text{ (m}^3\text{/h)} = 50 \times \text{Engine Power (kW)}$


The fan starts with the Diesel engine-driven pump

(DAB control panels have a dedicated contact for this purpose)

HYDRAULIC DIAGRAMS

FLOODED SUCTION HYDRAULIC DIAGRAMS

According to UNI EN 12845, a flooded suction type installation is to be preferred, with at least 2/3 of the tank level above the pump suction port. Each pump has a suction pipeline of at least 65 mm.

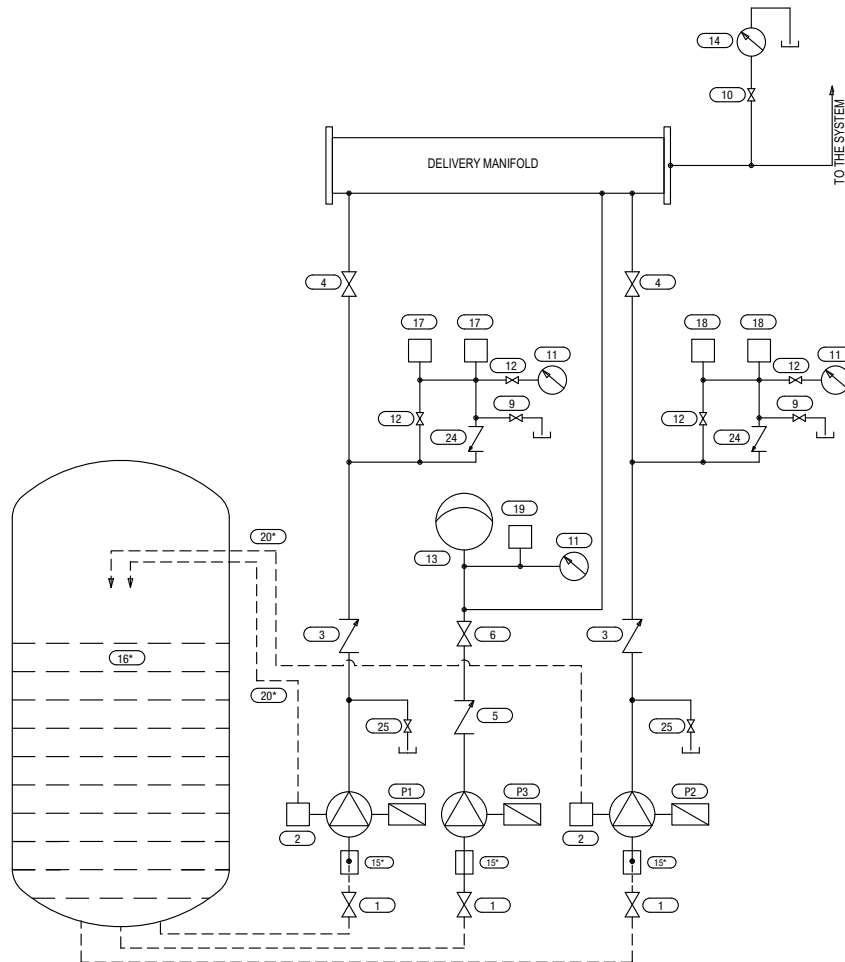

REF.	NAME
25	Check valve test line
24	Manual test circuit check valve
20*	Water recirculation and air bleed pipeline
19	Electric jockey pump pressure switch
18	Electric pump no. 2 start-up pressure switches
17	Electric pump no. 1 start-up pressure switches
16*	Water reserve
15*	Suction strainer
14*	Flow meter
13	Membrane expansion vessel
12	Pressure switch shut-off valve
11	Manometer


REF.	NAME
10*	Flow meter shut-off valve
9	Pump manual test valve
6	Delivery shut-off valve
5	Non-return valve
4	Delivery shut-off valve
3	Non-return valve
2	Water recirculation and air bleed diaphragm
1*	Suction shut-off valve
P3	Jockey pump
P2	Feed pump no. 2
P1	Feed pump no. 1

* Parts not included in the standard supply

HYDRAULIC DIAGRAMS

SUCTION LIFT HYDRAULIC DIAGRAMS

In suction lift installation, the distance between the pump suction and the minimum tank level must be less than 3,2 metres. A foot valve must be installed for each pump suction line. A priming tank must be installed for each main pump.

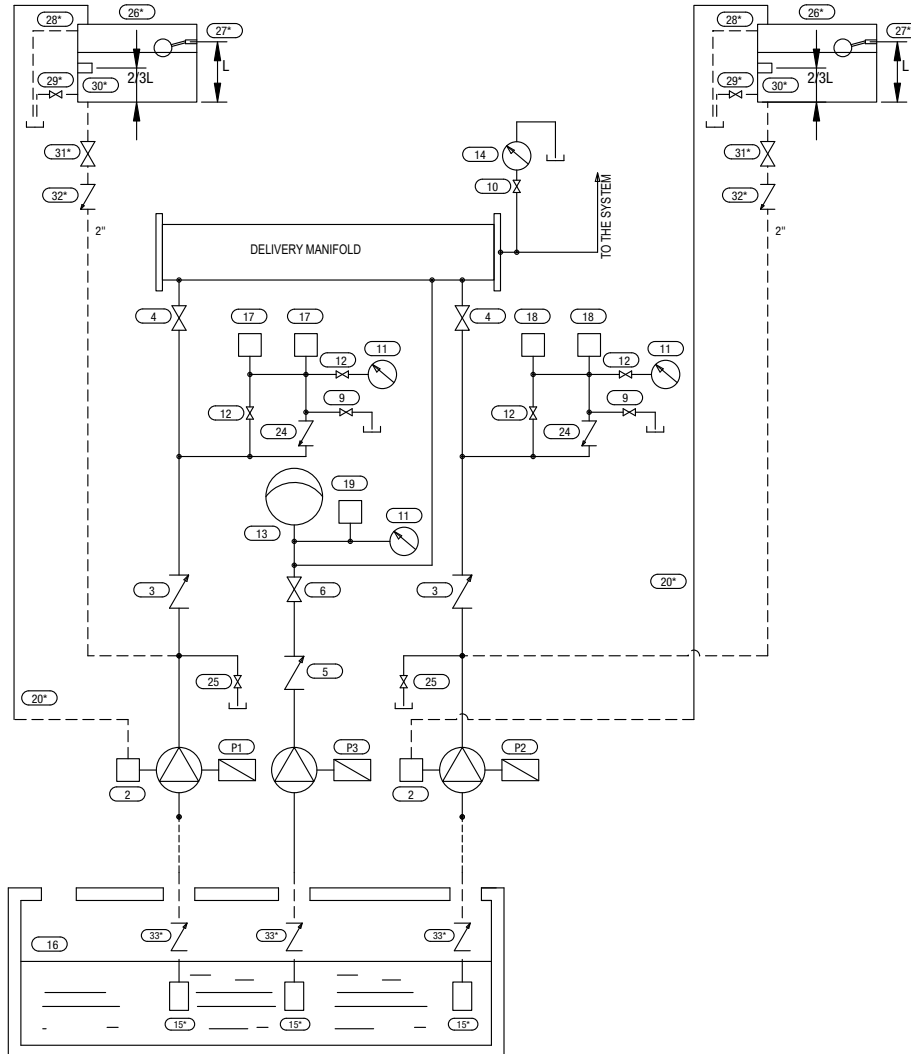

REF.	NAME
33*	Foot valve
32*	Priming line check valve
31*	Priming line shut-off valve
30*	Tank float
29*	Tank drain valve
28*	Overflow outlet
27*	Tank replenishment
26*	Priming tank
25	Check valve test line
24	Manual test circuit check valve
20*	Water recirculation and air bleed pipeline
19	Electric jockey pump pressure switch
18	Electric pump no. 2 start-up pressure switches
17	Electric pump no. 1 start-up pressure switches
16*	Water reserve




REF.	NAME
15*	Suction strainer
14*	Flow meter
13	Membrane expansion vessel
12	Pressure switch shut-off valve
11	Manometer
10*	Flow meter shut-off valve
9	Pump manual test valve
6	Delivery shut-off valve
5	Non-return valve
4	Delivery shut-off valve
3	Non-return valve
2	Water recirculation and air bleed diaphragm
P3	Jockey pump
P2	Feed pump no. 2
P1	Feed pump no. 1

* Parts not included in the standard supply

EXAMPLE OF INSTALLATION OF A FIRE-FIGHTING SYSTEM

WITH UNDERGROUND TANK AND PUMP ROOM, ACCORDING TO UNI 11292
ELECTRIC PUMPS OR DIESEL ENGINE-DRIVEN PUMPS

For the supply and installation of pre-assembled technical rooms, contact the sales network, which can offer supplies, time scales, and installation, autonomously and independently from DAB Pumps .

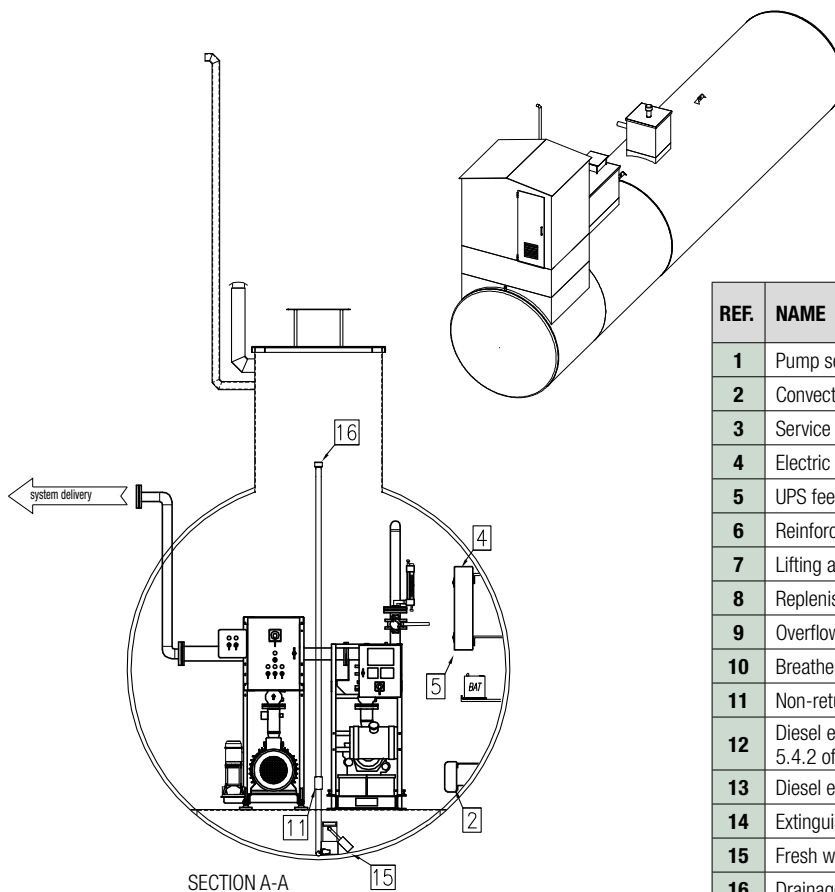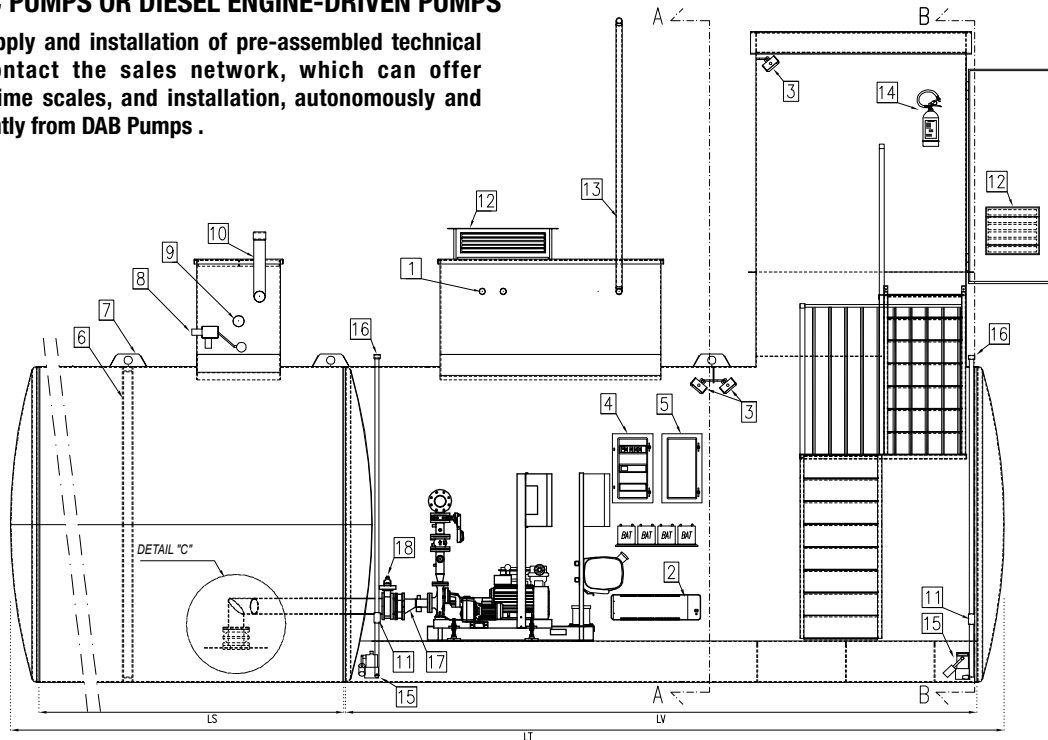

REF.	NAME
1	Pump set electric power input conduits
2	Convection heater
3	Service and emergency lights
4	Electric control panel
5	UPS feeding the lift pumps
6	Reinforcement U beam
7	Lifting and/or handling eye bolt
8	Replenishment stub pipes
9	Overflow
10	Breather
11	Non-return valve
12	Diesel engine ventilation and cooling grid in accordance with section 5.4.2 of UNI 11292
13	Diesel engine fume exhaust duct (not included in the supply)
14	Extinguishing class 34A144 BC extinguisher
15	Fresh water lifting pump
16	Drainage pump attachment to be connected to the drain
17	Eccentric adaptor
18	Tank suction shut-off valve

All systems are built in accordance with UNI EN 12845 and UNI 11292 standards.



TECHNICAL APPENDIX

UNI EN 12845 FIRE-FIGHTING PUMP SETS



EXAMPLE OF INSTALLATION OF A FIRE-FIGHTING SYSTEM

WITH ABOVE GROUND TANK AND PREFABRICATED PUMP HOUSE, ACCORDING TO UNI 11292
ELECTRIC PUMPS OR DIESEL ENGINE-DRIVEN PUMPS

For the supply and installation of pre-assembled technical rooms, contact the sales network, which can offer supplies, time scales, and installation, autonomously and independently from DAB Pumps .

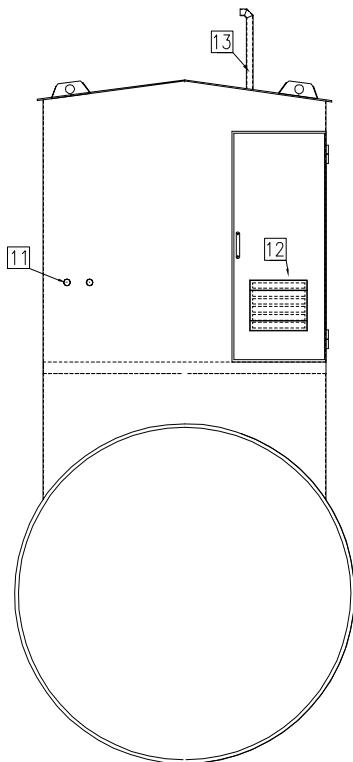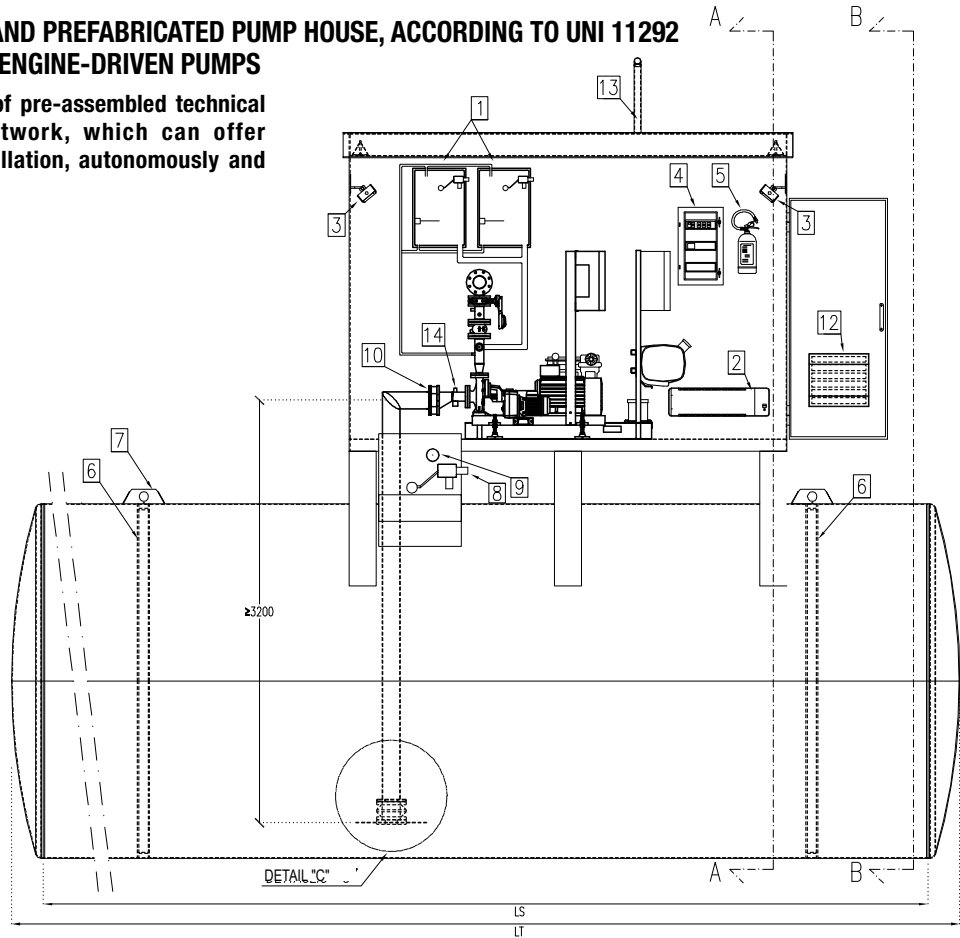

SECTION B-B

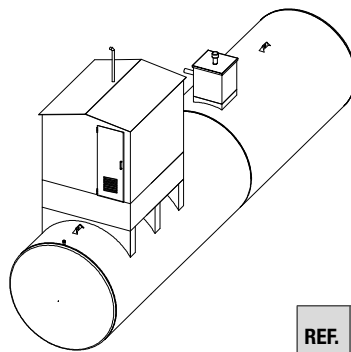


REF.	NAME
1	Priming tanks
2	Convection heater
3	Service and emergency lights
4	Electric control panel
5	Extinguishing class 34A144 BC extinguisher
6	Reinforcement U beam
7	Lifting and/or handling eye bolt
8	Replenishment stub pipes
9	Overflow
10	Anti-vibration coupling
11	Pump set electric power input conduits
12	Diesel engine ventilation and cooling grid in accordance with section 5.4.2 of UNI 11292
13	Diesel engine fume exhaust duct (not included in the supply)
14	Eccentric adaptor

All systems are built in accordance with UNI EN 12845 and UNI 11292 standards.

EXAMPLE OF INSTALLATION OF A FIRE-FIGHTING SYSTEM

For the supply and installation of pre-assembled technical rooms, contact the sales network, which can offer supplies, time scales, and installation, autonomously and independently from DAB Pumps .


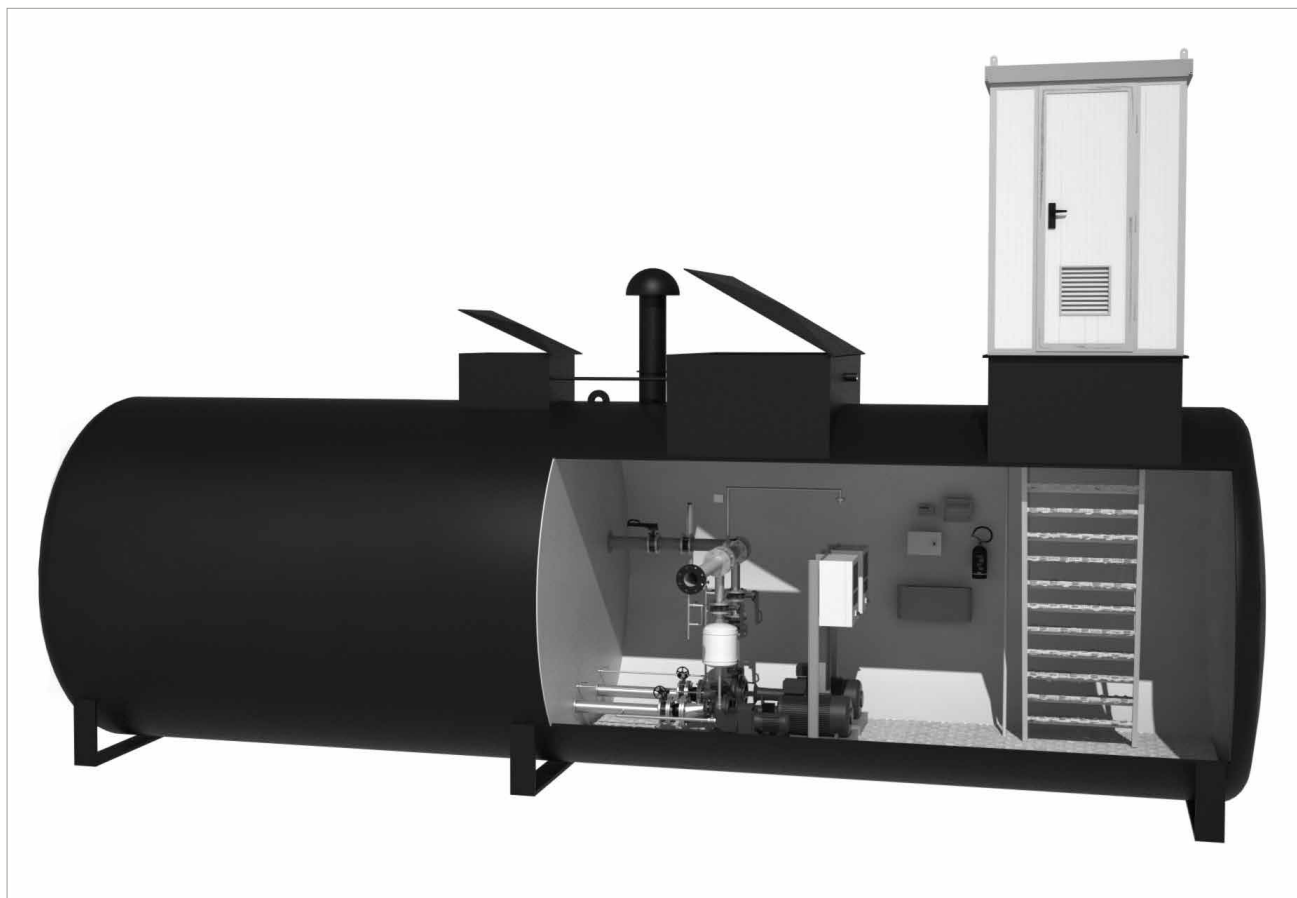


STORAGE TANK

The storage tank can be made of steel having a gauge between 5 and 6 mm, depending on the capacity, with internal U braces.

Externally, the entire module is protected by a thick layer of bitumen paint or, on request, a root-proof polyester liner, while the interior of the tank is protected with a red lead rust-proof primer. There is a manhole on the top of the tank providing access to the inspection well, protected by a grid and prearranged for connection of the replenishment pipe, breather pipe, and a pipe for the insertion of the level float.

If the capacity of a single tank is insufficient two or more tanks can be combined by means of a prearranged flanged interconnecting pipeline.

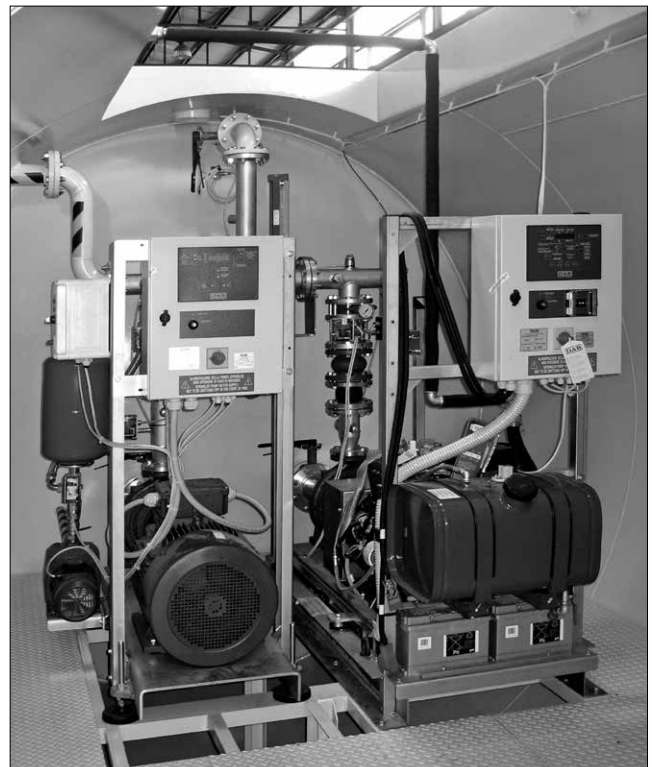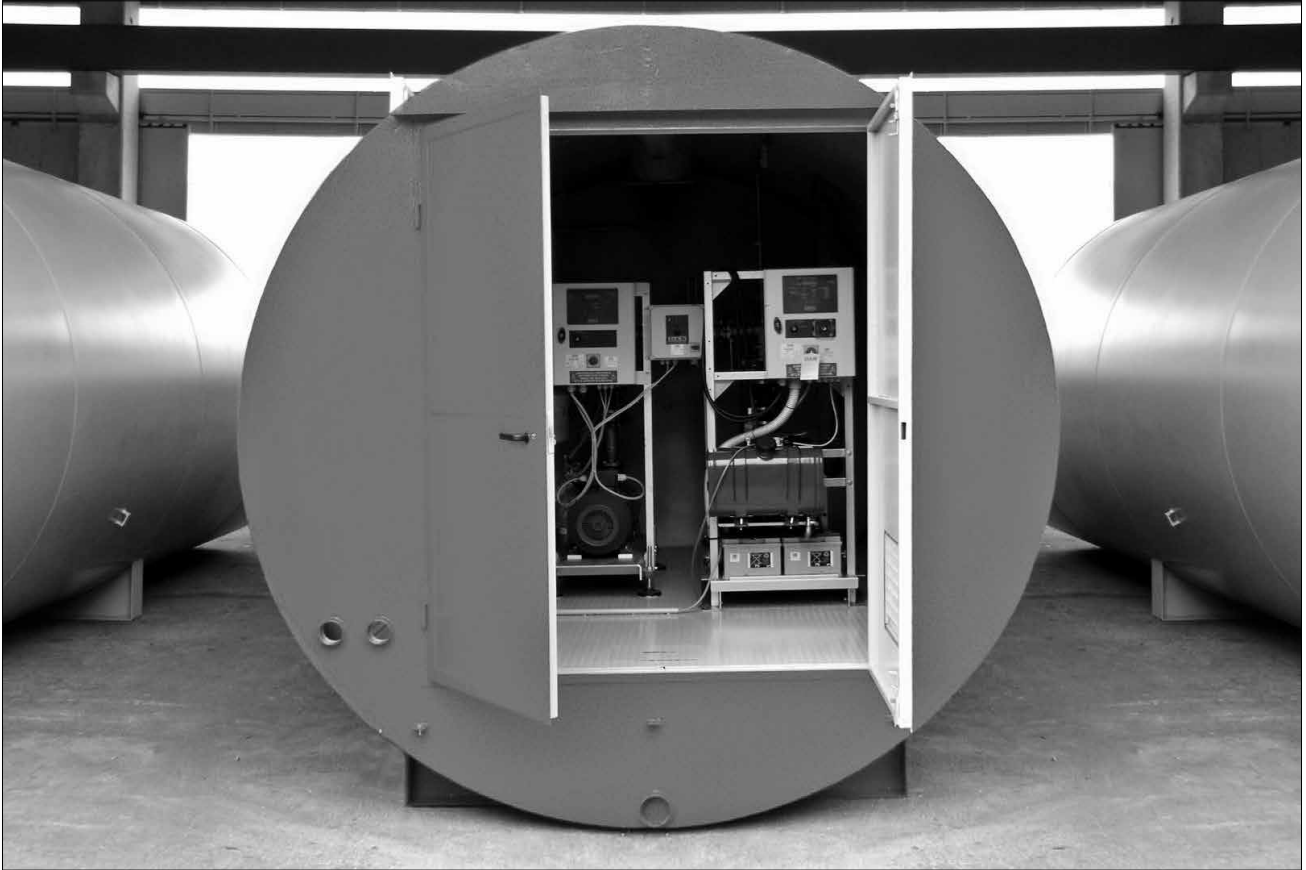


TECHNICAL APPENDIX


UNI EN 12845 FIRE-FIGHTING PUMP SETS

EXAMPLE OF INSTALLATION OF A FIRE-FIGHTING SYSTEM WITH SUBMERGED PUMPS


For the supply and installation of pre-assembled technical rooms, contact the sales network, which can offer supplies, time scales, and installation, autonomously and independently from DAB Pumps .

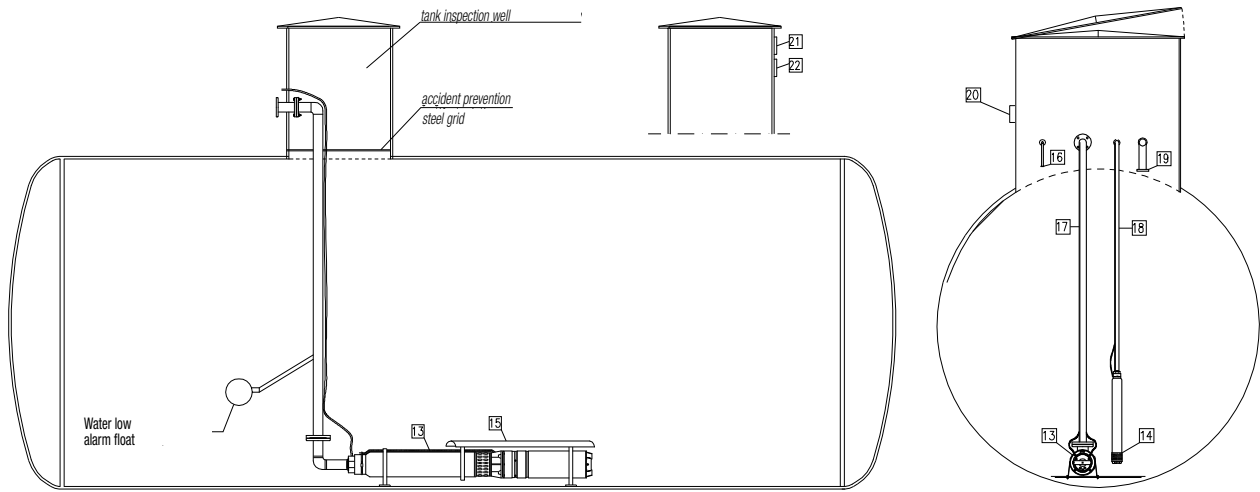

DETAIL OF REGULATION COMPONENTS/ SUBMERGED PUMP FIRE-FIGHTING SET CONTROL ROOM

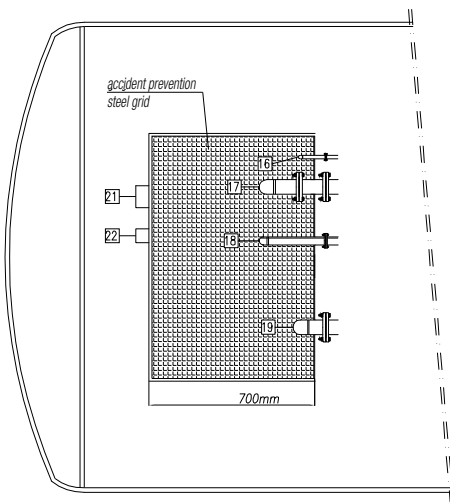

FIRE-FIGHTING SET ELECTRIC CONTROL PANEL AND MANIFOLD KIT TO UNI EN 12845, TO BE INSTALLED ON THE WALL OR IN A CONTAINMENT COMPARTMENT IN THE IMMEDIATE PROXIMITY OF THE TANK

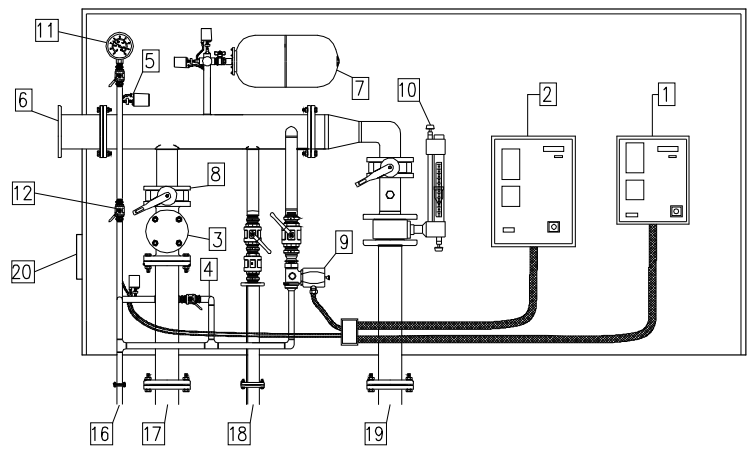

All systems are built in accordance with UNI EN 12845 and UNI 11292 standards.


REF.	NAME
1	Feed pump control panel
2	Jockey pump control panel
3	Inspectionable check valve
4	Water recirculation diaphragm
5	Main pump start pressure switch
6	Delivery manifold
7	Membrane expansion vessel
8	Suction valve
9	Weekly test solenoid valve
10	Flow meter
11	Manometer
12	Manual test cock

REF.	NAME
13	Feed pump/s
14	Jockey pump
15	Anti-vortex plate
16	Test circuit drain pipeline
17	Delivery feed pump pipeline
18	Delivery jockey pump pipeline
19	Flow meter water drain pipeline
20	Cable gland plate
21	Tank air breather
22	Tank water load

EXAMPLE OF FIRE-FIGHTING SYSTEM INSTALLATION

UNI EN 12845 PRIMING TANK

Monobloc system for underground installation, complete with water reserve, technical compartment, and pump set, designed and built in compliance with UNI EN 12845 and UNI 11292. Technical compartment equipped with forced ventilation and two drainage pumps including a generator set. Access to the technical room by means of a ladder protected by a prefabricated structure; possibility to make the fire water tank transportable by means of internal support inserts. The benefits of the SBAI system are ease of installation, and safety in compliance with standards. All systems are built in accordance with UNI EN 12845 and UNI 11292 standards.

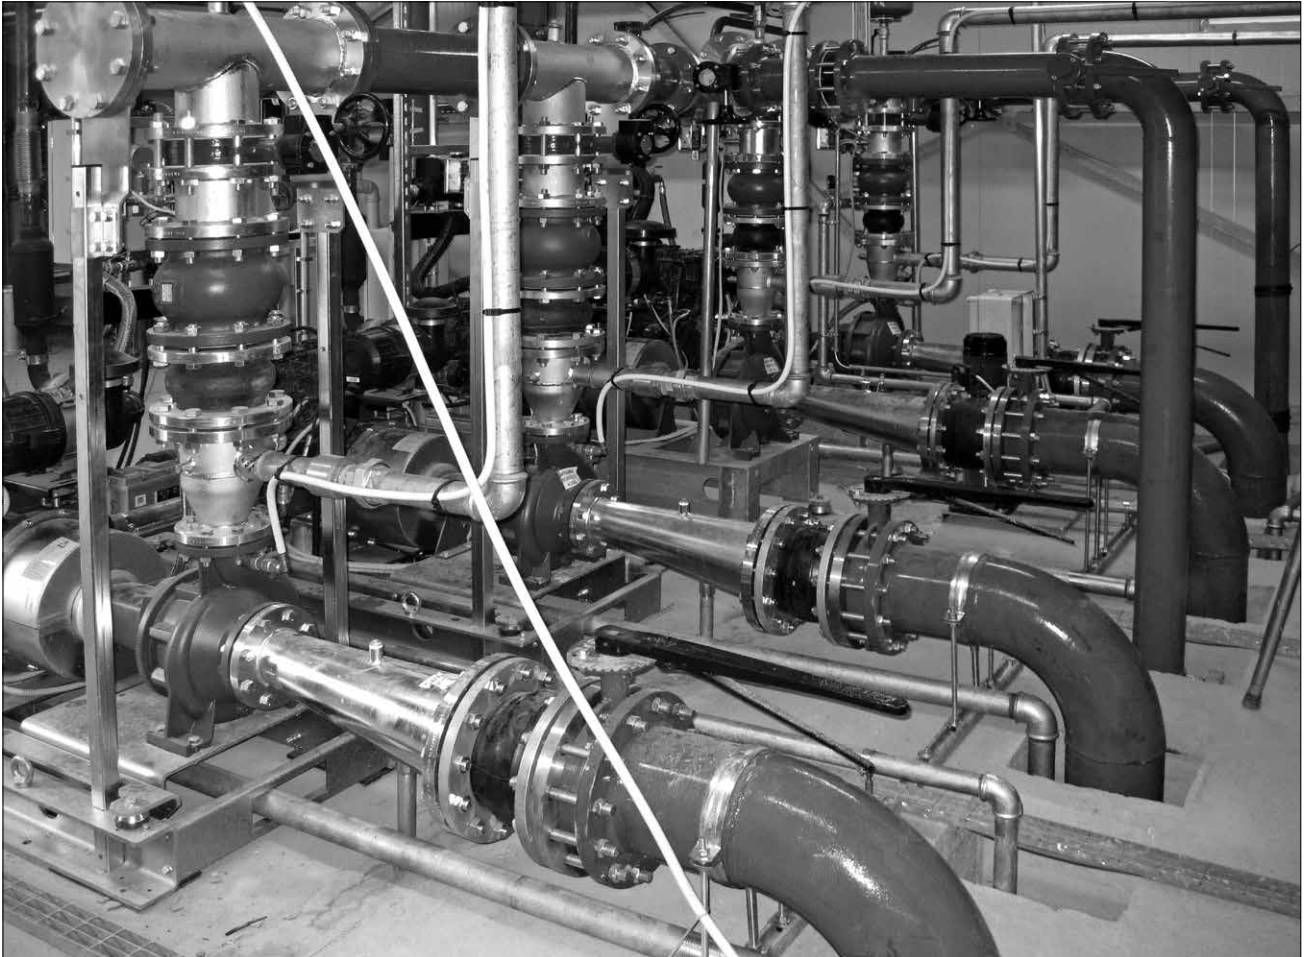


TECHNICAL APPENDIX

UNI EN 12845 FIRE-FIGHTING PUMP SETS


DAB INTERNAL PRODUCTION LINE

DAB Pumps S.p.A internally designs all the products, including pressurisation sets for civil and industrial applications.

During the years, DAB has particularly specialised in fire-fighting applications, offering solutions capable of meeting the requirement of modern system techniques. In 2014 DAB asked a prestigious third party Certifying Body to carry out a "Technical assessment for compliance to the requirements of UNI EN 12845 standards" for some fire-fighting pump models. **DAB has obtained the relevant certification, and the reassurance of being able to offer quality products to its customers.**

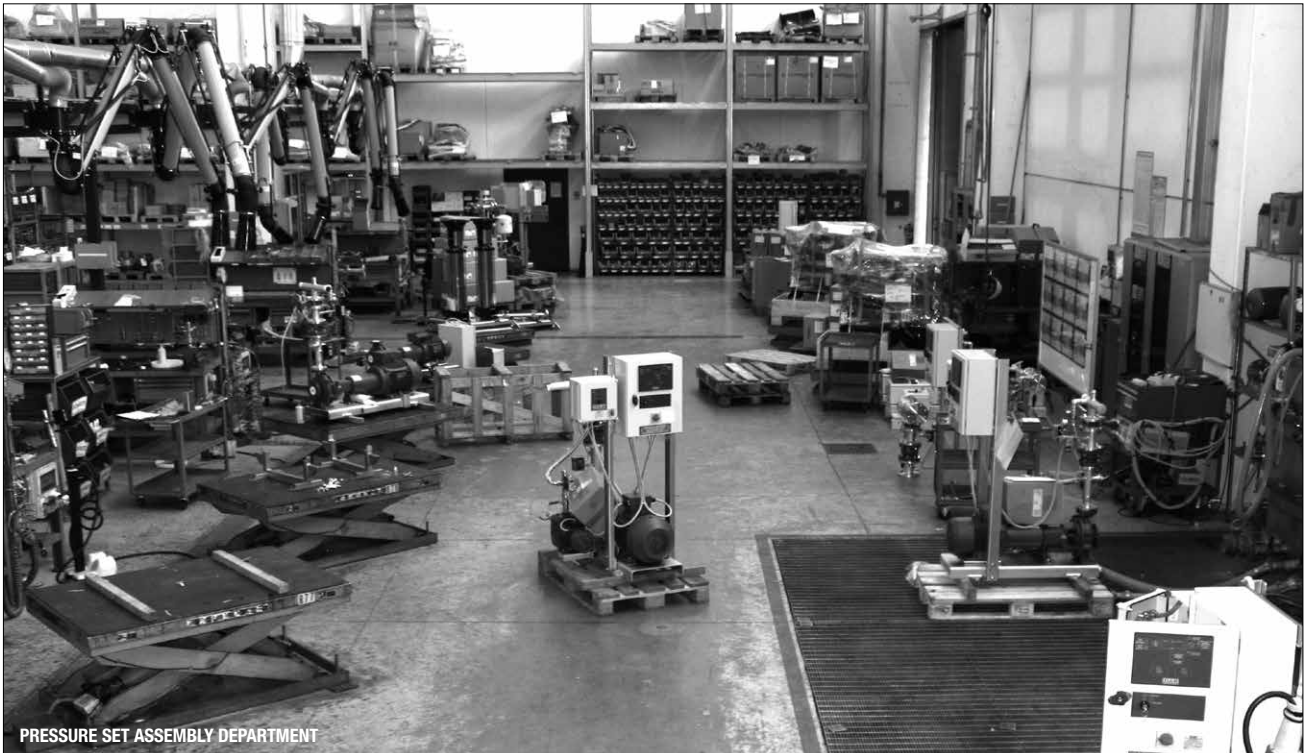

PRESSURE SET ASSEMBLY DEPARTMENT

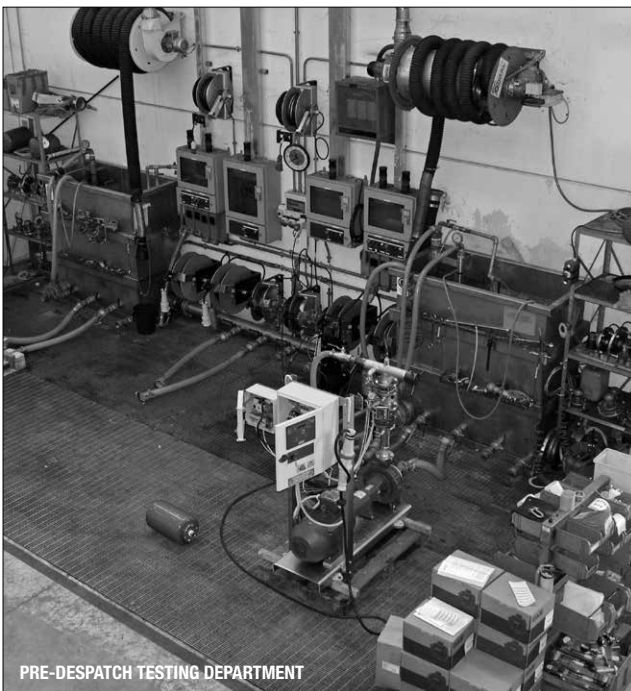

PRE-DESPATCH TESTING DEPARTMENT



PRESSURE SET ASSEMBLY DEPARTMENT

UNI EN 12845 CERTIFICATION



Istituto Giordano S.p.A.
Via Rossini, 2 - 47814 Bellaria-Igea Marina (RN) - Italia
Tel. +39 0541 343030 - Fax +39 0541 345540
istitutogiordano@giordano.it - www.giordano.it
PEC: ist-giordano@legalmail.it
Cod. Fisc./Part. IVA: 00 549 540 409 - Cap. Soc. € 1.500.000 iv.
R.E.A. c/o C.C.I.A.A. (RN) 156766
Registro Imprese di Rimini n. 00 549 540 409

COMPLIANCE EVALUATION REPORT No. 313795

Place and date of issue: Bellaria-Igea Marina - Italy, 28/02/2014

Customer: DAB PUMPS S.p.A. - Via Marco Polo, 14 - 30035 MESTRINO (PD) - Italy

Date test requested: 20/01/2014

Order number and date: 61935, 21/01/2014

Test date: 20/02/2014

Purpose of test: technical evaluation of compliance with the specifications of standard UNI EN 12845:2009 of a pre-assembled pumpset used to supply water to automatic sprinkler systems

Evaluation venue: at the Customer's premises

Specimen origin: sampled and supplied by the Customer

Specimen name

The specimen undergoing compliance evaluation is called "1KDN32-200/219 11 T EN12845-JET - code 500813550 - serial number 5.1408".

Description of specimen*

The specimen undergoing compliance evaluation comprises a pre-assembled pumpset used to supply water to automatic sprinkler systems.

(* according to that stated by the Customer.

Comp. AV
Revis. GC

This compliance evaluation report consists of 8 sheets and 1 annex.
This document is the English translation of the compliance evaluation report No. 313795 dated 28/02/2014 issued in Italian.
Date of translation: 30/04/2014.

Sheet
1 of 8

CLAUSES: This document relates only to the sample or material tested and shall not be reproduced except in full without Istituto Giordano's written approval.

UNI EN 12845 DIESEL CERTIFICATION



Istituto Giordano S.p.A.
Via Rossini, 2 - 47814 Bellaria-Igea Marina (RN) - Italia
Tel. +39 0541 343030 - Fax +39 0541 345540
istitutogiordano@giordano.it - www.giordano.it
PEC: ist-giordano@legalmail.it
Cod. Fisc./Part. IVA: 00 549 540 409 - Cap. Soc. € 1.500.000 iv.
R.E.A. c/o C.C.I.A.A. (RN) 156766
Registro Imprese di Rimini n. 00 549 540 409

COMPLIANCE EVALUATION REPORT No. 313798

Place and date of issue: Bellaria-Igea Marina - Italy, 28/02/2014

Customer: DAB PUMPS S.p.A. - Via Marco Polo, 14 - 30035 MESTRINO (PD) - Italy

Date test requested: 20/01/2014

Order number and date: 61935, 21/01/2014

Test date: 20/02/2014

Purpose of test: technical evaluation of compliance with the specifications of standard UNI EN 12845:2009 of a pre-assembled pumpset used to supply water to automatic sprinkler systems

Evaluation venue: at the Customer's premises

Specimen origin: sampled and supplied by the Customer

Specimen name

The specimen undergoing compliance evaluation is called "1KDN 32-200/219 MD EN 12845 - code 503883100 - serial number 5.1405".

Description of specimen*

The specimen undergoing compliance evaluation comprises a pre-assembled pumpset used to supply water to automatic sprinkler systems.

(* according to that stated by the Customer.

Comp. AV
Revis. GC

This compliance evaluation report consists of 10 sheets and 1 annex.
This document is the English translation of the compliance evaluation report No. 313798 dated 28/02/2014 issued in Italian.
Date of translation: 30/04/2014.

Sheet
1 of 10

CLAUSES: This document relates only to the sample or material tested and shall not be reproduced except in full without Istituto Giordano's written approval.

TRANSPORT AND INSTALLATION

Due to the sizes of the system, transport is relatively easy, and can be fully included in the offer.
When installing the whole system, it is sufficient to take the precaution to spread a bed of sand over the floor.



For the supply and installation of pre-assembled technical rooms, contact the sales network, which can offer supplies, time scales, and installation, autonomously and independently from DAB Pumps .



DWA

PUMPS SELECTOR

On-line product selection



DAB PUMPS LTD.
6 Gilbert Court
Newcomen Way
Severalls Business Park
Colchester
Essex
CO4 9WN - UK
salesuk@dwtgroup.com
Tel. +44 0333 777 5010



DAB PUMPS IBERICA S.L.
Calle Verano 18-20-22
28850 - Torrejón de Ardoz - Madrid
Spain
Info.spain@dwtgroup.com
Tel. +34 91 6569545
Fax: +34 91 6569676



DAB PUMPS SOUTH AFRICA (PTY) LTD
Twenty One industrial Estate,
16 Purlin Street, Unit B, Warehouse 4
Olifantsfontein - 1666 - South Africa
info.sa@dwtgroup.com
Tel. +27 12 361 3997



DAB PUMPS BV
'tHofveld 6 C1
1702 Groot Bijgaarden - Belgium
info.belgium@dwtgroup.com
Tel. +32 2 4668353



DAB PUMPS HUNGARY KFT.
H-8800
Nagykanizsa, Buda Ernő u.5
Hungary
Tel. +36 93501700



DAB PUMPS (QINGDAO) CO. LTD.
No.40 Kaituo Road, Qingdao Economic & Technological
Development Zone
Qingdao City, Shandong Province - China
PC: 266500
sales.cn@dwtgroup.com
Tel. +86 400 186 8280
Fax +86 53286812210



DAB PUMPS B.V.
Albert Einsteinweg, 4
5151 DL Drunen - Nederland
info.netherlands@dwtgroup.com
Tel. +31 416 387280
Fax +31 416 387299



DAB PUMPS POLAND Sp. z o.o.
Ul. Janka Muzykanta 60
02-188 Warszawa - Poland
polska@dabpumps.com.pl



DAB PUMPS DE MÉXICO, S.A. DE C.V.
Av Amsterdam 101 Local 4
Col. Hipódromo Condesa,
Del. Cuauhtémoc CP 06170
Ciudad de México
Tel. +52 55 6719 0493



OOO DAB PUMPS
Novgorodskaya str. 1, block G
office 308, 127247, Moscow - Russia
info.russia@dwtgroup.com
Tel. +7 495 122 0035
Fax +7 495 122 0036



DAB PUMPEN DEUTSCHLAND GmbH
Tackweg 11
D - 47918 Tönisvorst - Germany
info.germany@dwtgroup.com
Tel. +49 2151 82136-0
Fax +49 2151 82136-36



DAB PUMPS INC.
3226 Benchmark Drive
Ladson, SC 29456 - USA
info.usa@dwtgroup.com
Tel. 1-843-797-5002
Fax 1-843-797-3366



DAB PUMPS OCEANIA PTY LTD
426 South Gippsland Hwy,
Dandenong South VIC 3175 - Australia
info.oceania@dwtgroup.com
Tel. +61 1300 378 677